

**TRAIL KING TRAILERS PRICE LIST
TABLE OF CONTENTS**

PRICES EFFECTIVE 6/21/08.

Table of Contents Page 1

Advantage Hydraulic Detachable Gooseneck Trailer Page 2

Advantage Hydraulic Sliding Tail Trailer Page 7

Advantage Hydraulic Tail Trailer Page 11

Advantage Hydraulic Sliding Axle Trailer Page 14

Custom Hydraulic Detachable Gooseneck Trailer Page 17

Custom Hydraulic Tail Trailer Page 26

Folding Gooseneck Trailer Page 31

Hydraulic Booster Page 36

Light Industrial Hydraulic Tail Trailer Page 37

Mechanical Detachable Gooseneck Trailer Page 42

Rollback Trailer Page 49

Rigid Gooseneck Trailer Page 52

Tag Trailer Page 56

Tilt Utility Trailer Page 72

Tilt Trailer Page 76

Utility Trailer Page 86

Additional Deck Lengths Page 93

Rims, Hubs, Special Wheel Combinations Page 94




TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "ADVANTAGE" SERIES

STANDARD EQUIPMENT

2 - 22,500 lb. axles
 16½" x 7" air brakes
 *Anti-lock brake system
 8.25 x 22.5 disc wheels
 Outboard 10-hole pilot mount
 255/70R 22.5 16PR radial tires (H)
 Oil seals
 Air ride suspension
 10' 7" gooseneck with 82" swing clearance
 16" kingpin setting
 Patented hydraulic self-lifting detachable gooseneck
 (has ability to lift above or below transport positions)
 Hydraulic gooseneck support arm
 Patented air-activated, self-locking pin on gooseneck
 (positive lock)
 Gooseneck does not require ground bearing pads for
 lifting
 Front bolster

½" x 5" outside top flanges
 1½" oak decking (raised) (NET)
 4-beam main frame construction
 Automatic slack adjusters
 10" I-beam crossmembers on 24" centers
 100,000/80,000 PSI yield strength steel construction
 Swing-out outriggers with planks
 10 D-rings
 102" overall deck width
 24" loaded deck height
 50" loaded 5th wheel height
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness
 system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King maroon 2-part polyurethane

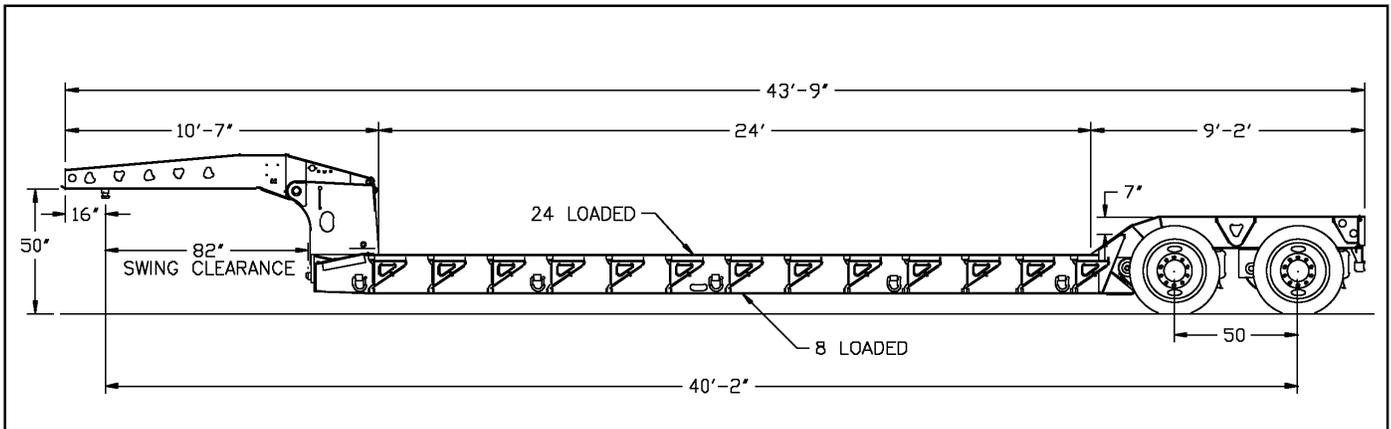

MODEL	LENGTH	DECK LENGTH	ITEM #	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------------	--------	------------	--------	------------

70,000 LBS. CONCENTRATED IN 16'

TK70HDG	41' 9"	22'	06346	\$45,530	06348	\$45,875
TK70HDG	43' 9"	24'	06347	\$46,670	06349	\$47,040

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "ADVANTAGE" SERIES

STANDARD EQUIPMENT

- | | |
|--|---|
| <ul style="list-style-type: none"> 3 - 22,500 lb. axles 16½" x 7" air brakes *Anti-lock brake system 8.25 x 22.5 disc wheels Outboard 10-hole pilot mount 255/70R 22.5 16PR radial tires (H) Oil seals Air ride suspension 10' 7" gooseneck with 82" swing clearance 16" kingpin setting Patented hydraulic self-lifting detachable gooseneck (has ability to lift above or below transport positions) Hydraulic gooseneck support arm Patented air-activated, self-locking pin on gooseneck (positive lock) Gooseneck does not require ground bearing pads for lifting Front bolster | <ul style="list-style-type: none"> ½" x 5" outside top flanges 1½" oak decking (raised) (NET) 4-beam main frame construction Automatic slack adjusters 10" I-beam crossmembers on 24" centers 100,000/80,000 PSI yield strength steel construction Swing-out outriggers with planks 10 D-rings 102" overall deck width 24" loaded deck height 50" loaded 5th wheel height Mid-turn signal/clearance light Rubber mounted sealed lights and sealed harness system Electrical system per DOT regulations 7-pole electrical socket Mud flaps Red & white conspicuity markings Color: Trail King maroon 2-part polyurethane |
|--|---|

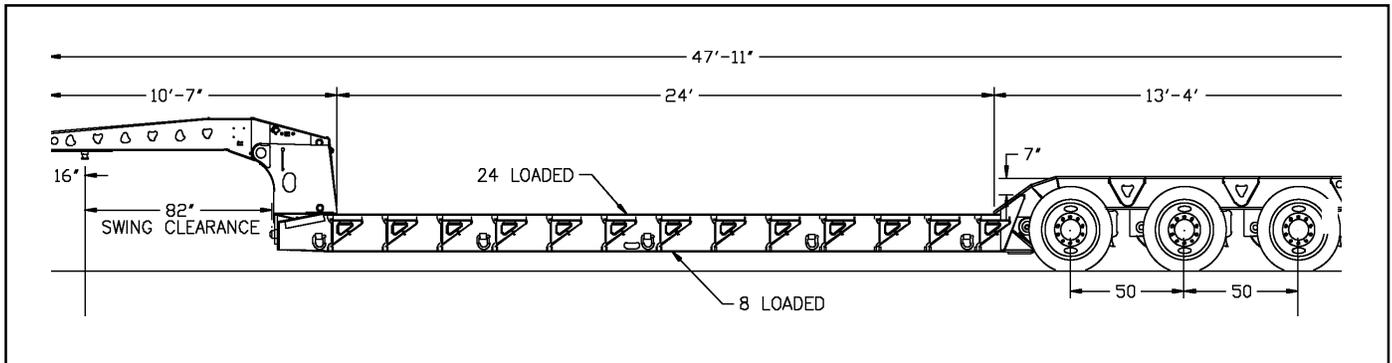

MODEL	LENGTH	DECK LENGTH	ITEM #	NO ABS	ITEM #	W/ABS 2S1M	ITEM#	W/ABS 4S2M
-------	--------	-------------	--------	--------	--------	------------	-------	------------

80,000 LBS. CONCENTRATED IN 16'

TK80HDG	45' 11"	22'			06336	\$54,605	06338	\$54,945
TK80HDG	47' 11"	24'			06337	\$55,815	06339	\$56,160
TK80HDG	49' 8"	25' 9"			06331	\$57,025	06332	\$57,360

**110,000 LB. UNIFORM CAPACITY

100,000 LBS. CONCENTRATED IN 16'

TK110HDG	45' 11"	22'	06340	\$56,125	06342	\$57,705	06344	\$58,040
TK110HDG	47' 11"	24'	06341	\$57,545	06343	\$59,170	06345	\$59,500
TK110HDG	49' 8"	25' 9"	06333	\$58,960	06334	\$60,635	06335	\$60,930

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system.

The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

**Although not necessary on 110,000 capacity trailers, Trail King highly recommends the use of anti-lock brake systems.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "ADVANTAGE" SERIES

	MODEL	TK70HDG	TK80HDG	TK110HDG
ITEM#	ITEM	PRICE	PRICE	PRICE
	HYDRAULIC GOOSENECK:			
00318	10'7" hyd gooseneck w/ 82" swing clearance	0	0	0
00319	12' hyd gooseneck w/ 98" swing clearance	N/A	1,380	1,380
07093	13' hyd gooseneck w/ 111" swing clearance (16" and 40" K.P.)	N/A	3,350	3,350
07649	13' low profile hydraulic gooseneck w/ 111" swing clearance (16" and 40" K.P.)	N/A	4,005	4,005
06588	Add'l king pin setting on 12' gooseneck (86" swing clearance)	425	425	425
	Optional 5th wheel height	CONSULT FACTORY		
00332	8 1/2 HP Kohler self-contained power unit	3,250	3,250	3,250
00333	13 HP Honda self-contained power unit	3,265	3,265	3,265
00336	Dual hydraulic system	535	535	535
00337	Fenders for 10'7" gooseneck	1,165	1,165	1,165
00338	Fenders for 12' or 13' gooseneck	1,365	1,365	1,365
00339	Additional transport doors (per pair) (specify deck length)	300	300	300
	MAIN DECK:			
00343	8'6" deck width	0	0	0
00344	9' deck width	580		
00345	9' deck width		895	895
06643	20" loaded deck height	1,500	1,500	1,500
06648	Knuckle trough in last 6' of load deck w// 1/4" MF-80 and recessed header beam	220	220	220
00353	1 3/8" Apitong raised decking (net)	670	670	670
00354	1 3/4" Apitong raised decking (net)	920	920	920
00355	12" standard swing-out outriggers (Ea.)	105	105	105
00359	Less std. 12" swing-outs on 22' load deck	(870)	(870)	(870)
00360	Less std. 12" swing-outs on 24' load deck	(935)	(935)	(935)
06355	Less std. 12" swing-outs on 26' load deck	(1,015)	(1,015)	(1,015)
00361	Double outriggers (per pair)	460	460	460
00362	Swing-out brackets only (Ea.)	50	50	50
00363	31" front loading ramp	965	965	965
00046	Recessed d-rings (ea)	65	65	65
00045	D-rings (Ea.)	50	50	50
	HEAVY DUTY PACKAGE:			
00368	70,000 lbs capacity concentrated in 10'	435		
00369	80,000 lbs. capacity concentrated in 10' (inc. 1 3/4" apitong)		1,500	
00370	100,000 lbs. capacity concentrated in 10' (inc. 1 3/4" apitong)			1,625
06009	110,000 lb. capacity concentrated in 16'			880
06472	110,000 lb. capacity concentrated in 10' (inc. 1 3/4" apitong)			2,530
06647	4" stub crossmembers in outer bays for crossmembers on 12" centers	840	840	840
00372	Top flange reinforcement	625	625	625



TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "ADVANTAGE" SERIES

	MODEL	TK70HDG	TK80HDG	TK110HDG
ITEM#	ITEM	PRICE	PRICE	PRICE
	WHEEL AREA:			
00376	Removable wheel covers (per axle)(tapered/squared)	950	950	950
00379	10 ga. floor plate bolted in bottom of boom	345		
00380	10 ga. floor plate bolted in bottom of boom		420	420
07089	Lowered front crossmember in wheel area (Advantage HDG)	355	355	355
00381	60" rear load ramps (wood-filled)	1,640	1,640	1,640
06494	7' wood filled ramps (PTO powered, 36" wide)	3,320	3,320	3,320
00068	Spring assist (must have 60" ramps)	1,290	1,290	1,290
00386	54" axle spacing Air-ride susp.(adds to OAL)	915		
00388	54" axle spacing Air-ride susp.(adds to OAL)		995	995
06729	55" axle spacing Air-ride susp. (adds to OAL)	915		
06645	55" axle spacing Air-ride susp. (adds to OAL)		995	995
00392	60" axle spacing Air-ride susp. (adds to OAL)	1,180		
00394	60" axle spacing Air-ride susp. (adds to OAL)		1,975	1,975
	REAR DECK:			
00377	Full width rear deck with a 25° slope to the load deck. Note: Adds 1' to OAL. Does not include open boom trough. (Specify wood or steel.)	2,980		
00378	Full width rear deck w/ a 25° slope to the load deck. Note: Adds 1' to OAL. Does not include open boom trough. (Specify wood or steel.)		3,640	3,640
06396	Steel over wheels w/ 10 ga. bolted in bottom of boom trough with 25° slope to load deck. Adds 1' to OAL.	2,980		
06397	Steel over wheels w/ 10 ga. bolted in bottom of boom trough with 25° slope to load deck. Adds 1' to OAL.		3,640	3,640
00398	30" beavertail (adds 13" to OAL)	965	965	965
	SUSPENSIONS:			
00401	Air-ride suspension	0	0	0
06644	Air lift third axle (deletes spring brakes on lift axle)	N/A	1,250	1,250
	AXLES & BRAKES:			
00075	Air-ride raising and lowering valve Flip axle with air-ride suspension, standard tires, axles and all connections (must add needed frame reinforcement) (adds to OAL)	550	550	550
00407	8' 6" wide flip axle	N/A	12,720	12,720
00409	9' wide flip axle	N/A	13,120	13,120
05608	Single axle booster extension only	N/A	12,265	12,265
00076	Spring brakes (STD w/ ABS)	STD	STD	
00077	Spring brakes (per axle - minimum: 2 axles)			195
00420	Dust Shields (per axle)	105	105	105
	FRAME REINFORCEMENT			
06649	Frame reinforcing for flip axle 0000	N/A	1,250	1,250
06646	Frame reinforcing for single axle booster 000-0	N/A	1,685	1,685
00429	Brackets, electrical, and air connections for future flip (must order proper frame reinforcement). Frame reinforcement does not include brackets, electrical or air connections.	N/A	755	755
	Maximum # of axles in any configuration	2	4	4



TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "ADVANTAGE" SERIES

	MODEL	TK70HDG	TK80HDG	TK110HDG
ITEM#	ITEM	PRICE	PRICE	PRICE
	TIRES AND WHEELS			
00084	8.25 x 22.5 disc wheels	0	0	0
00090	255/70R 22.5 - 16PR radial tires	0	0	0
00437	275/70R 22.5 - 16PR radial tires (per tire)	73	73	73
	ELECTRICAL & MISC:			
00094	3rd Tail Light Package	120	120	120
06711	L.E.D. Lights (in lieu of standard)	560	560	560
00440	Remote flasher w/ battery back-up	310	310	310
06736	Strobe lights mounted in light channel	425	425	425
06737	Strobe light mounted on pedestal	320	320	320
06738	Revolving lights ILO strobe	55	55	55
05013	Flag holders (per pr.)	70	70	70
00253	PTO Wet Kit - Pump installation w/ air shift	2,115	2,115	2,115
00439	Factory install. gooseneck support plate (NET pricing)	560	560	560
		NET	NET	NET
00254	Factory installation of PTO/pump kit (NET)	640	640	640
		NET	NET	NET
06083	Liquid filled air pressure gauge	135	135	135
	PAINT: See Trail King Color Chart			




TRAIL KING HYDRAULIC SLIDING TAIL TRAILERS "ADVANTAGE" SERIES

STANDARD EQUIPMENT

2 - 22,500 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 6.75 x 17.5 disc wheels, 8-hole pilot mount, dual rims
 STANDARD: 235/75R x 17.5 radial tire
 Oil seals
 Air ride suspension, raising and lowering switch
 8' 0" upper deck
 16" kingpin setting with 86" swing clearance
 Hydraulic sliding axles
 No traveling hydraulic lines for sliding axle operation
 Air and electrical lines contained in protective track
 15' 10" tail with 48" fold under w/10° loading angle
 Tail raise to 68" dock height and lowers to the ground
 Heavy duty I-beam-style tail hinge beam
 Five (5) pair of vertical supports in fold-under
 12,000 lb. hydraulic winch (mounted on front of upper deck)

Raising and lowering switch
 Telescopic park stands
 1 1/2" oak decking (raised) (NET)
 Flush apitong in tail 1 3/8" NET
 Automatic slack adjusters
 Crossmembers on 12" centers
 Stake pockets on 48" centers
 2 tool boxes in the upper deck
 3/16" floor plate over the fold under
 102" deck width
 37 1/2" loaded deck height
 49" loaded 5th wheel height
 Mid-turn signal/clearance light
 Rubber mounted sealed lights w/sealed harness system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: choice of TK stock colors, 2-part polyurethane

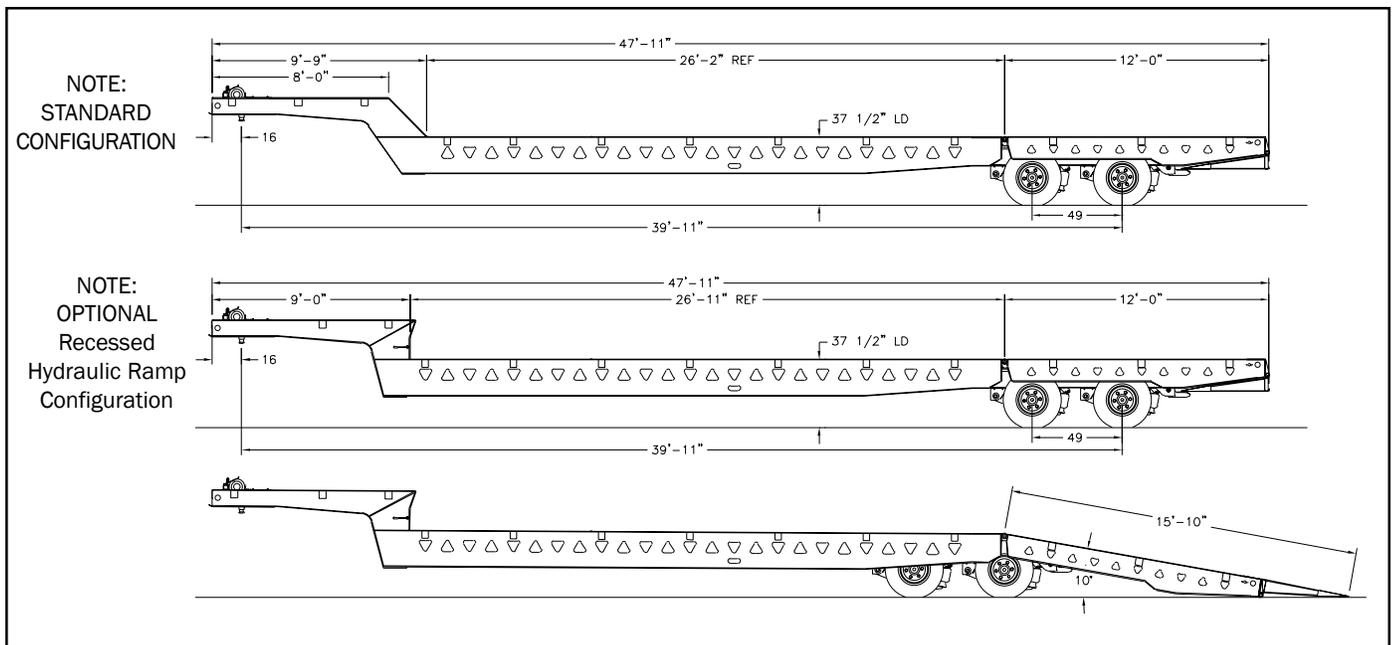

MODEL	LENGTH	15'10" TAIL W/48" FOLD-UNDER	
-------	--------	------------------------------	--

70,000 LB. CAPACITY
 50,000 LBS. CONCENTRATED IN 16'
TK70HST

48'

ITEM#	2S1M	ITEM#	4S2M
06693	\$58,615	06694	\$58,975

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC SLIDING TAIL TRAILERS "ADVANTAGE" SERIES

STANDARD EQUIPMENT

3 - 22,500 lb. axles
 12 ¼" x 7 ½" air brakes
 *Anti-lock brake system
 6.75 x 17.5 disc wheels, 8-hole pilot mount, dual rims
 STANDARD: 235/75R x 17.5 radial tire
 Oil seals
 Air ride suspension, raising and lowering switch
 8' 0" upper deck
 16" kingpin setting with 86" swing clearance
 Hydraulic sliding axles
 No traveling hydraulic lines for sliding axle operation
 Air and electrical lines contained in protective track
 15' 10" tail with 48" fold under w/10° loading angle
 Tail raise to 68" dock height and lowers to the ground
 Heavy duty I-beam-style tail hinge beam
 Five (5) pair of vertical supports in fold-under
 12,000 lb. hydraulic winch (mounted on front of upper deck)

Raising and lowering switch
 Telescopic park stands
 1 ½" oak decking (raised) (NET)
 Flush apitong in tail 1 ⅜" NET
 Automatic slack adjusters
 Crossmembers on 12" centers
 Stake pockets on 48" centers
 2 tool boxes in the upper deck
 ¼" floor plate over the fold under
 102" deck width
 37½" loaded deck height
 49" loaded 5th wheel height
 Mid-turn signal/clearance light
 Rubber mounted sealed lights w/sealed harness system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: choice of TK stock colors, 2-part polyurethane

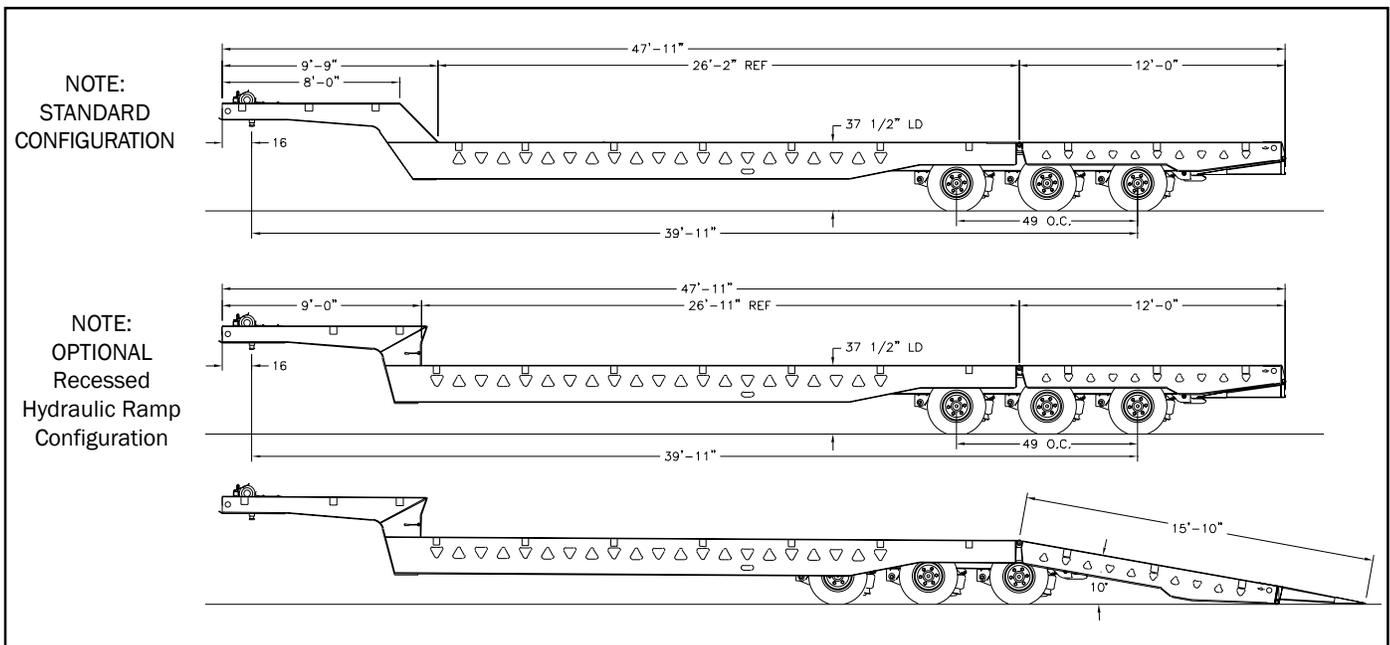

MODEL	LENGTH	15'10" TAIL W/48" FOLD-UNDER					
110,000 LB. CAPACITY 70,000 LBS CONCENTRATED IN 16'							
TK110HST	48'	ITEM# 06985	NO ABS \$75,890	ITEM# 06725	2S1M \$77,535	ITEM# 06726	4S2M \$77,895

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC SLIDING TAIL TRAILERS "ADVANTAGE" SERIES

	MODEL	TK70HST	TK110HST
ITEM#	ITEM	PRICE	PRICE
	UPPER DECK:		
00181	2-speed park stands (crank curb side)	865	865
00182	Hydraulic park stands ILO standard	1,400	1,400
00184	20,000 lb. hydraulic winch ILO standard	2,280	2,280
00185	Deduct standard winch	(2,275)	(2,275)
00196	Winch guard	460	460
00197	Winch roller (Recessed)	310	310
00186	15 HP Kohler SCU (mounted above winch)	4,085	4,085
00187	24 HP Honda SCU (mounted above winch)	5,680	5,680
00188	Cover for self-contained unit	800	800
00189	2' front fold-down extensions (includes load bearing tool box lids)	830	830
00191	6' Hyd. recessed upper deck ramp (12" less than deck width)	4,130	4,130
06158	8' Hyd. recessed upper deck ramp (12" less than deck width, required with 6" double drop deck)	4,415	4,415
	6' MANUAL GOOSENECK RAMP OPTIONS		
00192	Ladder type ramps (60" long x 20"wide)	1,800	1,800
00193	Wood-filled ramps (60" long x 20"wide)	2,045	2,045
00194	Star traction ramps over steel (60" long x 20"wide)	2,665	2,665
00195	Bracket (only) for ramps	250	250
	HD OPTION PACKAGE:		
00199	50,000 lb. cap. concentrated in 16'	0	
00200	50,000 lb. cap. concentrated in 10'	1,445	
00201	70,000 lb. cap. concentrated in 10'		965
	MAIN DECK:		
00205	8'6" deck width	0	
00207	9' deck width	915	
00208	9' deck width		1,070
00045	D-rings (Ea.)	50	50
00046	Recessed d-rings (ea)	65	65
05006	Stake pockets on 24" centers	585	585
02236	Stake pockets (ea.)	60	60
06735	Keyslots (ea)	55	55
00212	1 1/2" oak decking (raised) (NET) w/1 3/4" raised apitong in tail	215	215
00213	1 3/8" apitong deck (raised or flush) (NET) w/ flush apitong in tail	1,165	1,165
00214	4-way steel plate over wood	1,925	1,925
07650	1/4" floor plate over fold-under	725	STD
06690	Star traction material over steel on hyd. tail	1,500	1,500
06691	Star traction material over steel on 48" fold-under section only	480	480
06692	Traction aids on steel tail or outside 28" with wood in center	1,195	1,195
00230	Crossmembers on 12" centers on main deck	0	STD
00227	Crossmembers on 8" centers on main deck (N/A with triangle cut outs)	750	
00228	Crossmembers on 8" centers on main deck (N/A with triangle cut outs)		925



TRAIL KING HYDRAULIC SLIDING TAIL TRAILERS "ADVANTAGE" SERIES

	MODEL	TK70HST	TK110HST
ITEM#	ITEM	PRICE	PRICE
	SUSPENSION:		
06695	Raising and lowering 3-position valve	0	STD
	AXLES & BRAKES:		
00076	Spring brakes (STD w/ ABS)	N/C	
00079	Spring brakes (per axle - minimum: 2 axles)		195
	TIRES & WHEELS:		
07758	235/75R 17.5 16PR	STD	STD
07791	255/70R 22.5 (per tire)... deck height increases 4 1/2" and 52" fold-under)(ABS req. on 110)	(31)	(31)
	ELECTRICAL:		
00250	Winch remote control socket at rear with 50' cable (dual side controls N/A)	1,485	1,485
00251	Additional socket for remote at front of trl	145	145
06438	Wireless remote (dual side controls N/A)	1,295	1,295
00092	Side Clearance Lights / Pair	95	95
00093	Mid-turn signal (per pair)	120	120
00094	3rd Tail Light Package	120	120
07792	Recessed working lights in GN drop w/ switch (per pair)	176	176
06711	L.E.D. Lights (in lieu of standard)	560	560
	MISCELLANEOUS:		
06716	Dual side hydraulic controls	620	620
00252	Auxiliary air outlet at rear of trailer	275	275
00253	PTO Wet Kit - Pump installation w/ air shift	2,115	2,115
00254	Factory installation of PTO/pump kit (NET)	640	640
		NET	NET
00255	Snatch block with dead post	580	580
00256	6' aluminum incline assist ramps (for tail)	3,640	3,640
00257	8' aluminum incline assist ramps (for tail)	3,360	3,360
06083	Liquid filled air pressure gauge	135	135
	PAINT: See Trail King Color Chart		




TRAIL KING HYDRAULIC TAIL TRAILER "ADVANTAGE" SERIES

STANDARD EQUIPMENT

2 - 22,500 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 6.75 x 17.5 disc wheels 8-hole pilot mount, dual rims
 235/75R17.5 radial tires
 Oil seals
 Air ride suspension
 8' upper deck
 16" kingpin setting with 86" swing clearance
 12,000 lb. hydraulic winch with level wind
 (mounted on front of the upper deck)
 11'10" hydraulic tail with 46" fold-under
 14° load angle
 Tail raises to 58" dock height and lowers to the ground
 Hydraulic actuated tail lock
 Telescopic park stands
 Automatic slack adjusters

1 1/2" oak decking (raised) (NET)
 Flush apitong in tail 1 3/8" NET
 8" and 10" I-beam crossmembers on 12" centers
 100,000/80,000 PSI yield strength steel construction
 Stake pockets 48" O.C.
 102" overall deck width
 36" loaded deck height
 49" loaded 5th wheel height
 2 tool boxes in front of the upper deck
 3/16" floorplate over wheels and on fold-under
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness
 system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

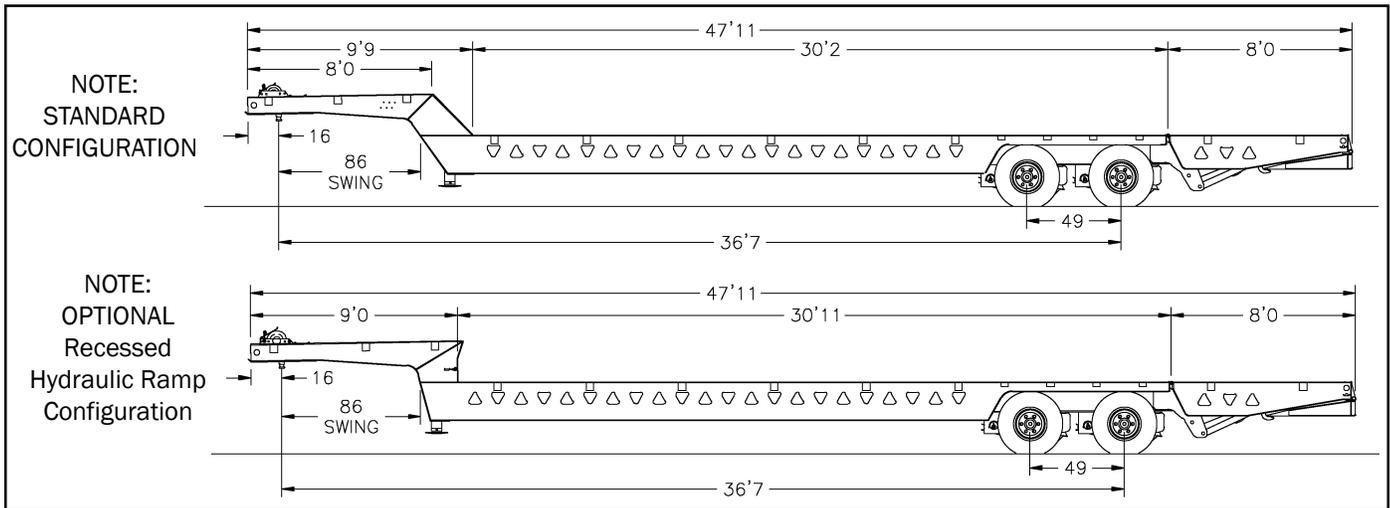

MODEL	LENGTH	11'10" TAIL W/46" FOLD-UNDER			
-------	--------	------------------------------	--	--	--

70,000 LB. CAPACITY
50,000 LBS. CONCENTRATED IN 16'

		ITEM#	2S1M	ITEM#	4S2M
TK70HT	44'	06464	\$46,065	06468	\$46,405
TK70HT	45'	06465	\$47,015	06469	\$47,360
TK70HT	46'	06466	\$47,975	06470	\$48,310
TK70HT	48'	06467	\$49,865	06471	\$50,210

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC TAIL TRAILER "ADVANTAGE" SERIES

	MODEL	TK70HT
ITEM#	ITEM	PRICE
	UPPER DECK:	
00181	2-speed park stands (crank curb side)	865
00182	Hydraulic park stands ILO standard	1,400
00184	20,000 lb. hydraulic winch ILO standard	2,280
00185	Deduct standard winch	(2,275)
00196	Winch guard	460
00197	Winch roller (Recessed)	310
00186	15 HP Kohler SCU (mounted above winch)	4,085
00187	24 HP Honda SCU (mounted above winch)	5,680
00188	Cover for self-contained unit	800
00189	2' front fold-down extensions (includes load bearing tool box lids)	830
00191	6' Hyd. recessed upper deck ramp (12" less than deck width)	4,130
06158	8' Hyd. recessed upper deck ramp (12" less than deck width, required with 6" double drop deck)	4,415
	6' MANUAL GOOSENECK RAMP OPTIONS	
00192	Ladder type ramps (60" long x 20"wide)	1,800
00193	Wood-filled ramps (60" long x 20"wide)	2,045
00194	Star traction ramps over steel (60" long x 20"wide)	2,665
00195	Bracket (only) for ramps	250
	HD OPTION PACKAGE:	
00199	50,000 lb. cap. concentrated in 16'	0
00200	50,000 lb. cap. concentrated in 10'	1,445
	MAIN DECK:	
00205	8'6" deck width	0
00207	9' deck width	915
00045	D-rings (Ea.)	50
00046	Recessed d-rings (ea)	65
05006	Stake pockets on 24" centers	585
02236	Stake pockets (ea.)	60
06735	Keyslots (ea)	55
00212	1 1/2" oak decking (raised) (NET) w/1 3/4" raised apitong in tail	215
00213	1 3/8" apitong deck (raised or flush) (NET) w/ flush apitong in tail	1,165
00214	4-way steel plate over wood	1,925
00216	3/16" floor plate over wheels only	0
00218	3/16" floor plate over wheels & fold-under	0
00219	1/4" floor plate over wheels only	495
00221	1/4" floor plate over wheels & fold-under	725
00224	Star traction material over steel on 11'10" hyd. tail and fold-under	1,090
00225	Star traction material over steel on 46" fold-under section only	425
00226	Traction aids on steel tail or outside 28" with wood center	800
00227	Crossmembers on 8" centers on main deck (N/A with triangle cut outs)	750
00230	Crossmembers on 12" centers on main deck	0
00232	Double drop deck, 6" drop approx 10° angle	2,990



TRAIL KING HYDRAULIC TAIL TRAILER "ADVANTAGE" SERIES

	MODEL	TK70HT
ITEM#	ITEM	PRICE


SUSPENSION:		
05007	Lowering kit (both axles)	385
00075	Air-ride raising and lowering valve	550
06715	Switch on upperdeck for lowering kit	145
AXLES & BRAKES:		
00076	Spring brakes (STD w/ ABS)	0
00244	3rd axle on spring suspension	6,660
00245	3rd axle on air-ride suspension (must add air ride for trailer also)	8,730
06325	Air lift front axle (tires must be smaller; must be 3-axle)	1,690
TIRES & WHEELS:		
00081	6.75 x 17.5 disc wheels 8-hole pilot mount	0
00246	7.5 x 22.5 disc wheels	0
07758	235/75R 17.5 16PR	0
00248	255/70R22.5 16PR (per tire)	(31)
ELECTRICAL:		
07190	Winch remote control socket at rear with 50' cable	1,485
07191	Wireless remote	1,295
00251	Additional socket for remote at front of trl	145
00092	Side Clearance Lights / Pair	95
00093	Mid-turn signal (per pair)	120
06711	L.E.D. Lights (in lieu of standard)	560
00094	3rd Tail Light Package	120
07792	Recessed working lights in GN drop w/ switch (per pair)	176
MISCELLANEOUS:		
06324	Dual side hydraulic controls	385
00252	Auxiliary air outlet at rear of trailer	275
00253	PTO Wet Kit - Pump installation w/ air shift	2,115
00254	Factory installation of PTO/pump kit (NET)	640 NET
00255	Snatch block with dead post	580
00256	6' aluminum incline assist ramps (for tail)	3,640
00257	8' aluminum incline assist ramps (for tail)	3,360
06083	Liquid filled air pressure gauge	135
	PAINT: See Trail King Color Chart	



TRAIL KING SLIDING AXLE TRAILER "ADVANTAGE" SERIES

STANDARD EQUIPMENT

- 2 - 22,500 lb. axles
- 12 1/4" x 7 1/2" air brakes
- *Anti-lock brake system
- 6.75 x 17.5 disc wheels, 8-hole pilot mount, dual rims
- 235/75R17.5 16PR radial tires
- Oil seals
- Air ride suspension
- 9' 10" upper deck
- 16" kingpin setting with 80" swing clearance
- Hydraulic sliding axles
- No traveling hydraulic lines for sliding axle operation
- Air and electrical lines contained in protective track
- Tilting main deck - forms a ramp to upper deck
- 6 1/2° loading angle, 15° dump angle
- 12,000 lb. hydraulic winch (mounted on front of upper deck)
- Telescopic park stands
- 1 1/2" oak decking (raised) (NET)
- Dual recessed winch rollers
- Automatic slack adjusters
- 3" x 5" tube crossmembers on 16" centers in WA
- 4" I-beam crossmembers on 12" centers
- 4-beam main frame construction
- Stake pockets and keyslots on 48" centers (alternating)
- 2 tool boxes in the upper deck
- 1/4" floorplate over the approach plate
- 102" deck width
- 37 1/2" loaded deck height
- 49" loaded 5th wheel height
- Mid-turn signal/clearance light
- Rubber mounted sealed lights with sealed harness system
- Electrical system per DOT regulations
- 7-pole electrical socket
- Mud flaps
- Red & white conspicuity markings
- Color: Trail King maroon 2-part polyurethane

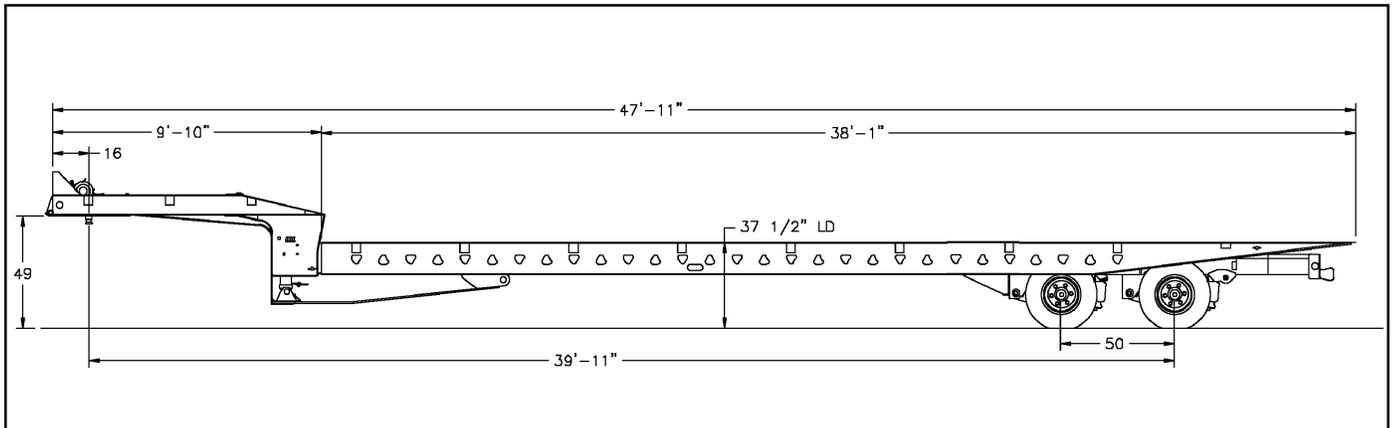

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------	---------------	--------	---------------

70,000 LB. CAPACITY
50,000 LBS. CONCENTRATED IN 16'

TK70SA	48'	06527	\$64,325	06529	\$64,695
TK70SA	50'	06528	\$65,770	06530	\$66,140

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING SLIDING AXLE TRAILER "ADVANTAGE" SERIES

STANDARD EQUIPMENT

- | | |
|---|--|
| <ul style="list-style-type: none"> 3 - 22,500 lb. axles 12 1/4" x 7 1/2" air brakes *Anti-lock brake system 6.75 x 17.5 disc wheels, 8-hole pilot mount, dual rims 235/75R17.5 16PR radial tires Oil seals Air ride suspension 9' 10" upper deck 16" kingpin setting with 80" swing clearance Hydraulic sliding axles No traveling hydraulic lines for sliding axle operation Air and electrical lines contained in protective track Tilting main deck - forms a ramp to upper deck 6 1/2° loading angle, 15° dump angle 12,000 lb. hydraulic winch (mounted on front of upper deck) Telescopic park stands 1 1/2" oak decking (raised) (NET) Dual recessed winch rollers | <ul style="list-style-type: none"> Automatic slack adjusters 3" x 5" tube crossmembers on 16" centers in WA 4" I-beam crossmembers on 12" centers 4-beam main frame construction Stake pockets and keyslots on 48" centers (alternating) 2 tool boxes in the upper deck 3/8" floorplate over the approach plate 102" deck width 37 1/2" loaded deck height 49" loaded 5th wheel height Mid-turn signal/clearance light Rubber mounted sealed lights with sealed harness system Electrical system per DOT regulations 7-pole electrical socket Mud flaps Red & white conspicuity markings Color: Trail King maroon 2-part polyurethane |
|---|--|

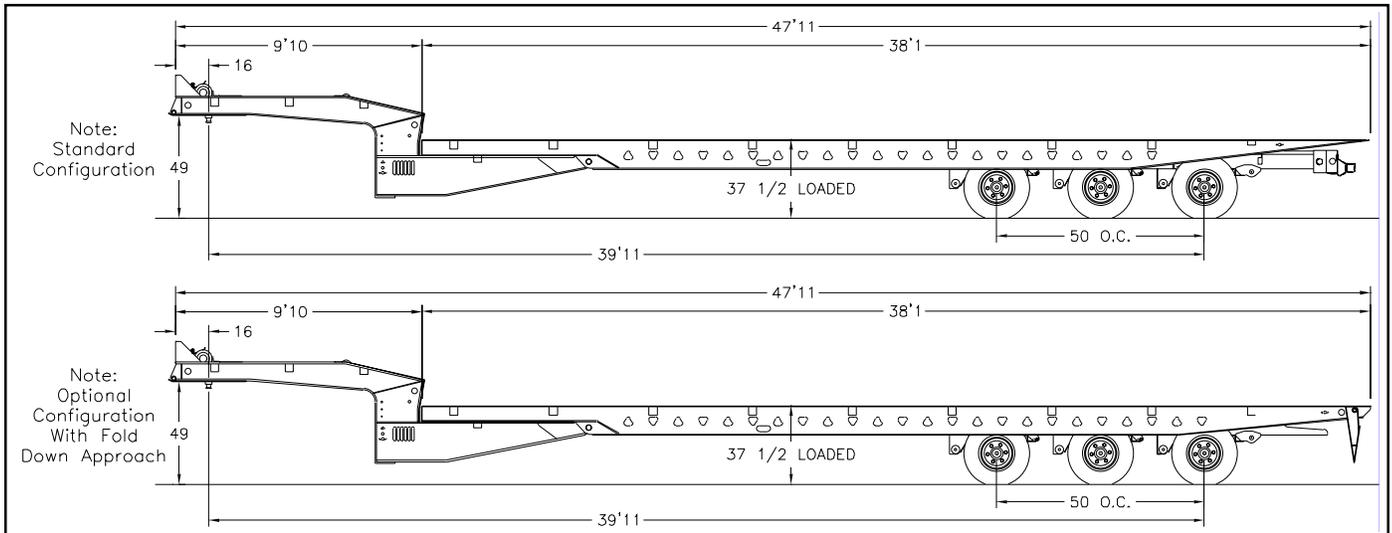

MODEL	LENGTH	ITEM #	NO ABS	ITEM #	W/ABS 2S1M	ITEM#	W/ABS 4S2M
-------	--------	--------	--------	--------	---------------	-------	---------------

110,000 LB. CAPACITY
70,000 LBS CONCENTRATED IN 16'

TK110SA	48'	06718	\$80,480	06719	\$82,200	06720	\$82,580
	50'	06739	\$82,065	06740	\$83,780	06741	\$84,165

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING SLIDING AXLE TRAILER "ADVANTAGE" SERIES

	MODEL	TK70SA	TK110SA
ITEM#	ITEM	PRICE	PRICE
	UPPER DECK:		
07184	11' 10" upper deck (does not add to OAL)	N/C	N/C
00181	2-speed park stands (crank curb side)	865	865
00182	Hydraulic park stands ILO standard	1,400	1,400
00184	20,000 lb. hydraulic winch ILO standard	2,280	2,280
00185	Deduct standard winch	(2,275)	(2,275)
07703	24HP Honda SCU (mounted under the GN drop area)	5,680	5,680
00196	Winch guard	460	460
	DECK:		
00205	8'6" deck width	0	0
00278	9' deck width	1,485	
00279	9' deck width		1,885
02236	Stake pockets (ea.)	60	60
00045	D-rings (Ea.)	50	50
06428	Pan-style D-rings (ea.)	65	65
06531	4-way keyhole slot down center of trailer (48" O.C.)	425	425
00281	1 1/8" Apitong deck (flush only) NET	1,165	1,165
00282	1 3/8" Apitong deck (raised only) NET	1,235	1,235
06696	Fold-out approach plate	0	0
	SUSPENSION:		
05007	Lowering kit (both axles)	385	385
	AXLES & BRAKES:		
06728	10'1" axle spacing	4,355	4,355
00076	Spring brakes (STD w/ ABS)	0	
00077	Spring brakes (per axle - minimum: 2 axles)		195
	TIRES & WHEELS:		
00081	6.75 x 17.5 disc wheels 8-hole pilot mount	0	0
00248	255/70R 22.5 (per tire)	(31)	(31)
	ELECTRICAL:		
00250	Winch remote control socket at rear with 50' cable (dual side controls N/A)	1,485	1,485
00251	Additional socket for remote at front of trl	145	145
06438	Wireless remote (dual side controls N/A)	1,295	1,295
00092	Side Clearance Lights / Pair	95	95
00093	Mid-turn signal (per pair)	120	120
06711	L.E.D. Lights (in lieu of standard)	560	560
	MISCELLANEOUS:		
06532	4-way keyhole slot down center of trailer (48" O.C.)	425	425
00252	Auxiliary air outlet at rear of trailer	275	275
00253	PTO Wet Kit - Pump installation w/ air shift	2,115	2,115
00254	Factory installation of PTO/pump kit (NET)	640	640
		NET	NET
00288	Hydraulic dock levelers (available with air-ride only) (lifts trailer approx. 12")	4,465	4,465
06083	Liquid filled air pressure gauge	135	135
	PAINT: See Trail King Color Chart		




TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "CUSTOM" SERIES

STANDARD EQUIPMENT

2 - 22,500 lb. axles
 16½" x 7" air brakes
 *Anti-lock brake system
 8.25 x 22.5 disc wheels
 Outboard 10-hole pilot mount
 255/70R x 22.5 16PR radial tires (H)
 Oil seals
 Air ride suspension
 10' 7" gooseneck with 82" swing clearance
 16" kingpin setting
 Patented hydraulic self-lifting detachable gooseneck
 (has ability to lift above or below transport positions)
 Hydraulic gooseneck support arm
 Patented air-activated, self-locking pin on gooseneck
 (positive lock)
 Gooseneck does not require ground bearing pads for
 lifting

1½" oak decking (raised) (NET)
 4-beam main frame construction
 Automatic slack adjusters
 10" I-beam crossmembers on 24" centers
 100,000/80,000 PSI yield strength steel construction
 Swing-out outriggers with planks
 10 D-rings
 102" overall deck width
 24" loaded deck height
 50" loaded 5th wheel height
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness
 system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

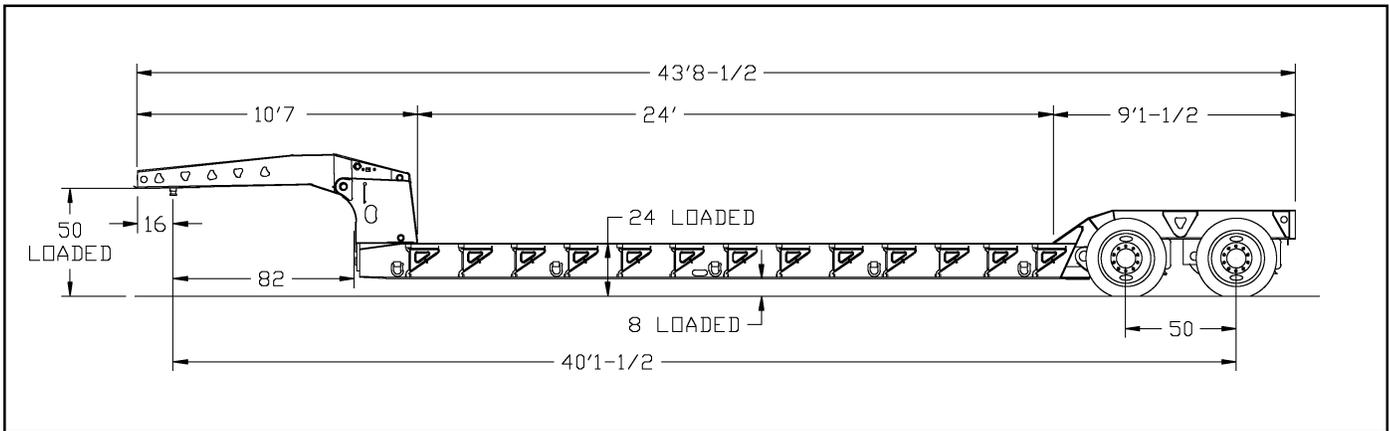

MODEL	LENGTH	DECK LENGTH	ITEM #	W/ABS 2S1M	ITEM #	W/ABS 4S2M
70,000 LBS. CONCENTRATED IN 16'						
TK70HDG	41' 9"	22'	00294	\$48,885	00295	\$49,260
TK70HDG	43' 9"	24'	00296	\$50,135	00297	\$50,515
TK70HDG	45' 9"	26'	06374	\$51,390	06375	\$51,760

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "CUSTOM" SERIES

STANDARD EQUIPMENT

3 - 22,500 lb. axles
 16½" x 7" air brakes
 *Anti-lock brake system
 8.25 x 22.5 disc wheels
 Outboard 10-hole pilot mount
 255/70R x 22.5 16PR radial tires (H)
 Oil seals
 Air ride suspension
 10' 7" gooseneck with 82" swing clearance
 16" kingpin setting
 Patented hydraulic self-lifting detachable gooseneck
 (has ability to lift above or below transport positions)
 Hydraulic gooseneck support arm
 Patented air-activated, self-locking pin on gooseneck
 (positive lock)
 Gooseneck does not require ground bearing pads for
 lifting

1½" oak decking (raised) (NET)
 4-beam main frame construction
 Automatic slack adjusters
 10" I-beam crossmembers on 24" centers
 100,000/80,000 PSI yield strength steel construction
 Swing-out outriggers with planks
 10 D-rings
 102" overall deck width
 24" loaded deck height
 50" loaded 5th wheel height
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness
 system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

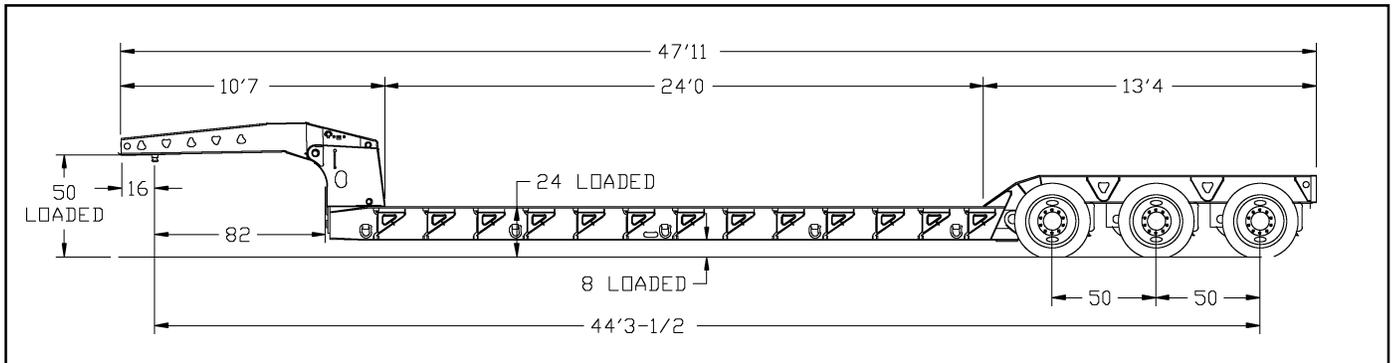

MODEL	LENGTH	DECK LENGTH	ITEM #	NO ABS	ITEM #	W/ABS 2S1M	ITEM#	W/ABS 4S2M
-------	--------	-------------	--------	--------	--------	------------	-------	------------

80,000 LBS. CONCENTRATED IN 16'

TK80HDG	45' 11"	22'			00300	\$59,350	00301	\$59,720
TK80HDG	47' 11"	24'			00302	\$60,635	00303	\$61,000
TK80HDG	49' 11"	26'			06386	\$62,200	06387	\$62,560

**110,000 LB. UNIFORM CAPACITY

100,000 LBS. CONCENTRATED IN 16'

TK110HDG	45' 11"	22'	05263	\$61,010	00306	\$62,720	05003	\$63,090
TK110HDG	47' 11"	24'	05264	\$62,545	00307	\$64,255	00308	\$64,625
TK110HDG	49' 11"	26'	06388	\$64,165	06389	\$65,875	06390	\$66,255

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system.

The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

**Although not necessary on 110,000 capacity trailers, Trail King highly recommends the use of anti-lock brake systems.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "CUSTOM" SERIES

STANDARD EQUIPMENT

3 - 25,000 lb. axles
 16½" x 7" air brakes
 *Anti-lock brake system
 8.25 x 22.5 disc wheels
 Outboard 10-hole pilot mount
 275/70R x 22.5 16PR radial tires (H)
 Oil seals
 Air ride suspension
 12' gooseneck with 98" swing clearance
 16" kingpin setting
 Patented hydraulic self-lifting detachable gooseneck
 (has ability to lift above or below transport positions)
 Hydraulic gooseneck support arm
 Patented air-activated, self-locking pin on gooseneck
 (positive lock)
 Gooseneck does not require ground bearing pads for
 lifting

1½" oak decking (raised) (NET)
 4-beam main frame construction
 Automatic slack adjusters
 10" I-beam crossmembers on 24" centers
 MF-80 or T-1 equivalent steel construction
 Swing-out outriggers with planks
 10 D-rings
 102" overall deck width
 24" loaded deck height
 50" loaded 5th wheel height
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness
 system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

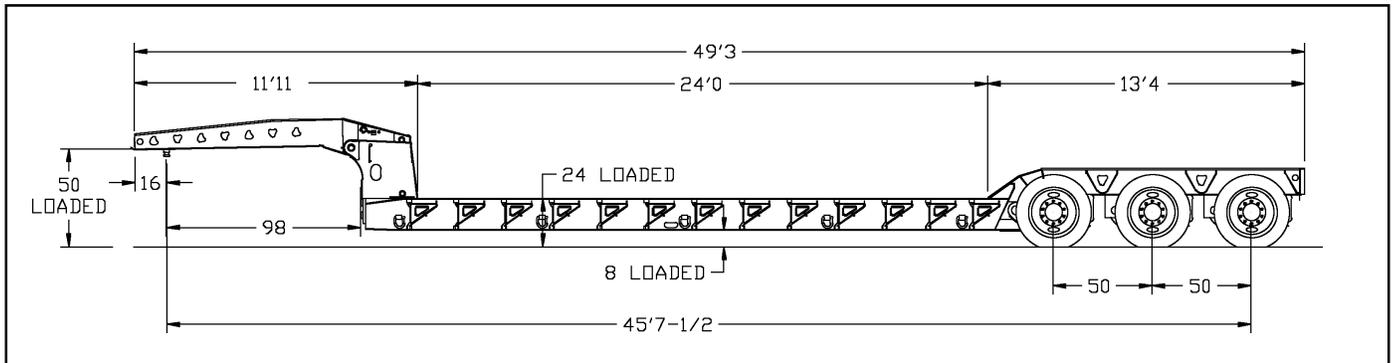

MODEL	LENGTH	DECK LENGTH	ITEM #	NO ABS	ITEM #	W/ABS 2S1M	ITEM#	W/ABS 4S2M
-------	--------	-------------	--------	--------	--------	------------	-------	------------

120,000 LBS. CONCENTRATED IN 16'

TK120HDG	47' 3"	22'	03311	\$77,140	00311	\$78,855	00312	\$79,220
TK120HDG	49' 3"	24'	03313	\$78,450	00313	\$80,160	00314	\$80,530
TK120HDG	51' 3"	26'	06391	\$80,135	06392	\$81,850	06393	\$82,215

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system.

The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

**Although not necessary on 110,000 capacity trailers, Trail King highly recommends the use of anti-lock brake systems.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008


TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "CUSTOM" SERIES

16-WHEEL TRUNNION AXLE

STANDARD EQUIPMENT

4 - 20,000 lb. axles
 12¹/₄" x 5¹/₂" air brakes
 6.75 x 17.5-6 disc wheels, 8-hole pilot mount, dual rims
 215/75R x 17.5 16PR radial tires (H)
 Oil seals
 69" trunnion walking beam suspension
 10' 7" gooseneck with 82" swing clearance
 16" kingpin setting
 Patented hydraulic self-lifting detachable gooseneck (has ability to lift above or below transport positions)
 Hydraulic gooseneck support arm
 Patented air-activated, self-locking pin on gooseneck (positive lock)
 Gooseneck does not require ground bearing pads for lifting
 1¹/₂" oak decking (raised) (NET)

4-beam main frame construction
 10" I-beam crossmembers on 24" centers
 100,000/80,000 PSI yield strength steel construction
 Swing-out outriggers with planks
 27" beavertail (steel with traction aids)
 Triangle cut-outs
 102" overall deck width
 120" expandable wheel area
 24" loaded deck height
 50" loaded 5th wheel height
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

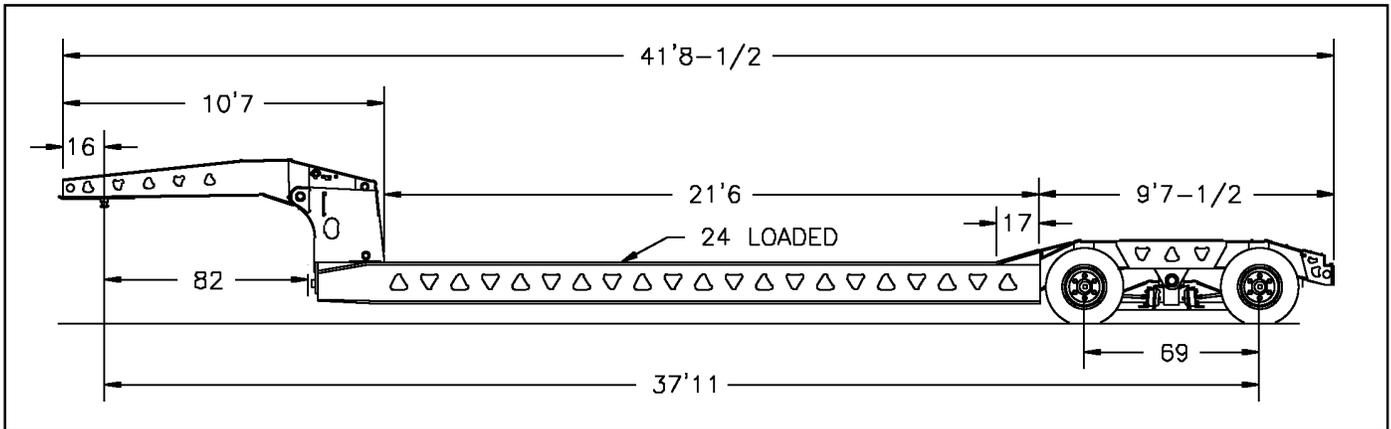

MODEL	LENGTH	KINGPIN	DECK LENGTH	ITEM #	RETAIL
(FIXED WHEEL AREA) 88,000 LB. CAPACITY					
TK88HDG	39' 9"	35' 11"	18'	06454	\$65,435
TK88HDG	41' 9"	37' 11"	20'	06455	\$66,720
TK88HDG	43' 9"	39' 11"	22'	06456	\$68,000
(EXPANDABLE WHEEL AREA) 88,000 LB. CAPACITY					
TK88HDGE	39' 9"	35' 11"	18'	06457	\$78,890
TK88HDGE	41' 9"	37' 11"	20'	06458	\$80,180
TK88HDGE	43' 9"	39' 11"	22'	06459	\$81,475

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "CUSTOM" SERIES

	MODEL	TK70 HDG	TK80 HDG	TK110 HDG	TK120 HDG	TK88 HDG	TK88 HDGE
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE
	HYDRAULIC GOOSENECK:						
00318	10'7" hyd gooseneck w/ 82" swing clearance	STD	STD	STD	N/A	STD	STD
00319	12' hyd gooseneck w/ 98" swing clearance	N/A	1,380	1,380		1,380	1,380
00320	12' hyd gooseneck w/ 98" swing clearance				STD		
07093	13' hyd gooseneck w/ 111" swing clearance (16" and 40" K.P.)	N/A	3,350	3,350		3,350	3,350
07649	13' low profile hydraulic gooseneck w/ 111" swing clearance (16" and 40" K.P.)	N/A	4,005	4,005	N/A	N/A	N/A
00324	13' hyd gooseneck w/ 111" swing clearance (16" and 40" K.P.)				1,975		
00326	18' hyd gooseneck w/ 168" swing clearance. (16HP Vanguard required if self-contained) (Optional lengths add to OAL)	N/A	N/A	11,935		N/A	N/A
00327	18' hyd gooseneck w/ 168" swing clearance. (16HP Vanguard required if self-contained) (Optional lengths add to OAL)				10,450		
00329	Flip option for 18' gooseneck (58" long)	N/A	N/A	2,625	2,625	2,625	2,625
06366	Hydraulics assist for flip gooseneck	N/A	4,355	4,355	4,355	4,355	4,355
00330	Additional kingpin settings (Ea.) (specify setting)	455	455	455	455	455	455
	Optional 5th wheel heights	CONSULT FACTORY					
00331	Electric/hydraulic self-contained system	2,250	2,250	2,250	N/A	2,250	2,250
00332	8 1/2 HP Kohler self-contained power unit	3,250	3,250	3,250	3,250	3,250	3,250
00333	13 HP Honda self-contained power unit	3,265	3,265	3,265	3,265	3,265	3,265
00334	15 HP Kohler self-contained power unit	4,230	4,230	4,230	4,230	4,230	4,230
00335	16 HP Vanguard self contained unit	4,455	4,455	4,455	4,455	4,455	4,455
00336	Dual hydraulic system	535	535	535	535	535	535
00337	Fenders for 10'7" gooseneck	1,165	1,165	1,165	N/A	1,165	1,165
00338	Fenders for 12' or 13' gooseneck	N/A	1,365	1,365	1,365	1,365	1,365
00339	Additional transport doors (per pair) (specify deck height)	300	300	300	300	300	300
	MAIN DECK:						
00340	8' deck width	(445)					
00341	8' deck width		(645)	(645)			
00342	8' deck width				(1,125)	N/A	N/A
00343	8'6" deck width	STD	STD	STD	STD	STD	STD
00344	9' deck width	580					
00345	9' deck width		895	895			
00346	9' deck width				995		
00347	9' deck width					670	
00348	10' deck width	1,475					
00349	10' deck width		2,190	2,190	2,190		
00351	10' deck width					1,320	N/A
00352	Drop side deck (24" center, 18" outside and 6" clearance)	1,665	1,665	1,665	1,665	N/A	N/A
06289	Tapered front deck (including HD outriggers & high lift cylinders)	5,830	5,830	5,830	CONSULT FACTORY	5,830	5,830



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "CUSTOM" SERIES

	MODEL	TK70 HDG	TK80 HDG	TK110 HDG	TK120 HDG	TK88 HDG	TK88 HDGE
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE
MAIN DECK CONTINUED...							
06730	Knuckle trough in last 6' of load deck w/recessed header beam and MF-80 in bottom	785	785	785	785	N/A	N/A
00353	1 3/8" Apitong raised decking (net)	670	670	670	N/A	670	670
00354	1 3/4" Apitong raised decking (net) (Needed with 80 & 100 units concentrated in 10')	920	920	920	920	N/A	920
00355	12" standard swing-out outriggers (Ea.)	105	105	105	N/A	105	105
00356	Heavy duty swing-out outriggers (ea)	155	155	155	155	STD	STD
00470	Less STD 12" swingouts on 22' load deck	(1,720)	(1,720)	(1,720)	(1,720)	(1,720)	(1,720)
00468	Less STD 12" swingouts on 24' load deck	(1,860)	(1,860)	(1,860)	(1,860)	(1,860)	(1,860)
06606	Less std. 12" swing-outs on 26' load deck	(2,005)	(2,005)	(2,005)	(2,005)	(2,005)	(2,005)
00361	Double outriggers (per pair)	460	460	460	460	460	460
00362	Swing-out brackets only (Ea.)	50	50	50	50	50	50
00363	31" front loading ramp	965	965	965	965	965	965
07790	31" high capacity front loading ramp	N/A	N/A	N/A	1,555	N/A	N/A
06368	42" front loading ramps (steel with traction aids)	1,170	1,170	1,170	1,170	1,170	1,170
00364	Center loading ramp (wood/steel)	780	780	780	780	780	780
00046	Recessed d-rings (ea)	65	65	65	65	65	65
00045	D-rings (Ea.)	50	50	50	50	50	50
06367	Angle style tie downs (pair)	65	65	65	65	65	65
	HEAVY DUTY PACKAGE:						
00366	I-beam style bolsters (include full depth crossmembers in wheel area)	780					
00367	I-beam style bolsters (include full depth crossmembers in wheel area)		1,155	1,155	1,155	N/A	N/A
00368	70,000 lbs capacity concentrated in 10'	435					
00369	80,000 lbs. capacity concentrated in 10' (inc. 1 3/4" apitong)		1,500			N/A	N/A
00370	100,000 lbs. capacity concentrated in 10' (inc. 1 3/4" apitong)			1,625			
06009	110,000 lb. capacity concentrated in 16'			880			
06010	110,000 lbs. concentrated in 10' (inc. 1 3/4" apitong)			3,755			
00371	120,000 lbs. concentrated in 10' (inc. 1 3/4" apitong)				1,945		
00372	Top flange reinforcement	625	625	625	625	625	625
06168	4" stub crossmember in outer bays for crossmembers 12" O.C.	870	870	870	870	870	870
	WHEEL AREA:						
00374	Half front bolster	STD	STD	STD	STD	STD	STD
00375	Full height front bolster (approx. 40° angle)	675	675	675	675	N/A	N/A
00376	Removable wheel covers (per axle)(tapered/squared)	950	950	950	950	N/A	950
00485	Full width steel covered rear deck (does not include boom trough)	2,195					
00486	Full width steel covered rear deck (does not include boom trough)		2,865	2,865	2,865	N/A	N/A
07704	Steel over wheels w/ 10 ga. bolted in bottom of boom trough	2,195					
07705	Steel over wheels w/ 10 ga. bolted in bottom of boom trough		2,865	2,865	2,865	2,865	N/A
00379	10 ga. floor plate bolted in bottom of boom	345					
00380	10 ga. floor plate bolted in bottom of boom		420	420	420	420	N/A
00054	60" wood filled rear ramps (24" wide) (wood filled or ladder)	2,535	2,535	2,535	2,535	N/A	N/A
06463	72" rear loading ramps (wood filled or ladder)	1,785	1,785	1,785	1,785	1,785	1,785



TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "CUSTOM" SERIES

	MODEL	TK70 HDG	TK80 HDG	TK110 HDG	TK120 HDG	TK88 HDG	TK88 HDGE
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE

WHEEL AREA CONTINUED...

00382	Less bolsters between wheels	(675)					
00383	Less bolsters between wheels		(1,005)	(1,005)	(1,005)	(1,005)	N/A
00386	54" axle spacing Air-ride susp.(adds to OAL)	915					
00387	54" axle spacing Air-ride susp.(adds to OAL)		965				
00388	54" axle spacing Air-ride susp.(adds to OAL)			995			
00389	54" axle spacing (adds to OAL) Air-ride				1,090		
00390	60" axle spacing (adds to OAL) - Hutch 7700 spring suspension	995					
00392	60" axle spacing Air-ride susp. (adds to OAL)	1,180					
00393	60" axle spacing Air-ride susp. (adds to OAL)		1,925				
00394	60" axle spacing Air-ride susp. (adds to OAL)			1,975			
00395	60" axle spacing (adds to OAL) Air-ride				2,165	2,165	2,165
00396	Detachable Wheel Area	4,955	4,955	4,955	4,955	N/A	N/A
05614	Bolt-on front bolster (required with detachable wheel area)	2,105	2,105	2,105	2,105	N/A	N/A
00398	30" beavertail (adds 13" to OAL)	965	965	965	965	965	N/A
06462	27" beavertail (steel with traction aids)	NA/	N/A	N/A	N/A	STD	STD
06277	Wood filled beavertail	310	310	310	310	310	310
	SUSPENSIONS:						
00400	Multi leaf spring suspension	(4,025)	N/A	N/A	N/A	N/A	N/A
00401	Air-ride suspension	STD	STD	STD	STD	N/A	N/A
00402	Single point suspension	1,860	N/A	N/A	N/A	N/A	N/A
00403	TR8600 suspension (or equivalent) (Not permissible for overweight loads. Air ride recommended.)	N/A	(2,450)	(2,450)	N/A	N/A	N/A
00404	TR8750 suspension (or equivalent) (Not permissible for overweight loads. Air ride recommended.)	N/A	(1,490)	(1,490)	(1,070)	N/A	N/A
00691	25,000 lb. axles (actual axle capacity may vary due to suspension)	270					
06437	25,000 lb.axles (per axle)		140	140	STD	N/A	N/A
	AXLES & BRAKES:						
00075	Air-ride raising and lowering valve *TR series suspensions are not permissible for overweight loads. (Air ride is recommended.) Flip axle with air-ride suspension, standard tires, axles and all connections (must add needed frame reinforcement) (adds to OAL)	550	550	550	550	N/A	N/A
00405	8' wide flip axle	N/A	12,490	12,490		N/A	N/A
00406	8' wide flip axle				13,295	N/A	N/A
00407	8' 6" wide flip axle	N/A	12,720	12,720			
00408	8'6" wide flip axle				13,530	N/A	N/A
00409	9' wide flip axle	N/A	13,120	13,120			
00410	9' wide flip axle				13,930	N/A	N/A
00411	10' wide flip axle	N/A	13,675	13,675			
00412	10' wide flip axle				14,485	N/A	N/A
00413	Deduct to make flip axle fixed	N/A	(1,230)	(1,230)	(1,230)	N/A	N/A
00414	Rear load-bearing tail channel for flip axles	N/A	700	700	700	N/A	N/A
00415	Non-loadbearing cover for flip (outsides only-steel)	N/A	590	590	590	N/A	N/A



TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "CUSTOM" SERIES

	MODEL	TK70 HDG	TK80 HDG	TK110 HDG	TK120 HDG	TK88 HDG	TK88 HDGE
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE
AXLES & BRAKES CONTINUED...							
00416	Loadbearing cover for flip (steel or wood)	N/A	760	760	760	N/A	N/A
00417	Tension bolts for loadbearing flip axle (required for point loading flip)	N/A	425	425	425	N/A	N/A
00418	3rd flip axle in lieu of 3rd fixed axle (third must be on air)	N/A	2,115	2,115	2,115	N/A	N/A
00419	Deduct 3rd axle (Trailer must have air-ride)	N/A	(8,875)	(8,875)	(8,875)	N/A	N/A
00076	Spring brakes (STD w/ ABS)	STD	STD				
00077	Spring brakes (per axle - minimum: 2 axles)			195	195	N/A	N/A
00420	Dust Shields (per axle)	105	105	105	105	N/A	N/A
00422	Air lift rear axle (w/ dual ride height-deletes spring brakes)	N/A	1,690	1,690	1,690	N/A	N/A
FRAME REINFORCEMENT:							
00423	Frame reinforcing for flip axle 0000	N/A	1,685	1,685			
00424	Frame reinforcing for flip axle 0000	N/A			2,265	N/A	N/A
00425	Frame reinforcing for single axle booster 000-0	N/A	2,125	2,125			
00426	Frame reinforcing for single axle booster 000-0	N/A			2,565	N/A	N/A
00428	Frame reinforcing for tandem axle booster 00-00	N/A			4,780	N/A	N/A
05608	Single axle booster extension only	N/A	12,265	12,265	12,265	N/A	N/A
05609	Tandem axle booster extension				17,635	N/A	N/A
00429	Brackets, electrical, and air connections for future flip (MUST order proper frame reinforcement). Frame reinforcement does not include brackets, electrical, or air connections.	N/A	755	755	755	N/A	N/A
	Maximum # of axles in any configuration	2	4	4	4	N/A	N/A
TIRES & WHEELS:							
00076	Spring brakes (STD w/ ABS)	0	0				
00082	6.75 x 17.5 disc wheels 8-hole pilot mount	N/C	N/C	N/C	N/A		
00084	8.25 x 22.5 disc wheels	STD	STD	STD	STD	STD	STD
00081	6.75 x 17.5 disc wheels 8-hole pilot mount					0	0
00090	255/70R 22.5 - 16PR radial tires	STD	STD	STD	N/A	N/A	N/A
00432	11R 22.5-14PR radial tires (per tire)	67	67	67	N/A	N/A	N/A
06984	11R24.5 14PR radial tires (per tire)	102					
00437	275/70R 22.5 - 16PR radial tires (per tire)	73	73	73	STD	N/A	N/A
06351	Heavy duty single point suspension	1,460					
06352	Heavy duty single point suspension		1,460	1,460			



TRAIL KING HYDRAULIC DETACHABLE GOOSENECK TRAILERS "CUSTOM" SERIES

	MODEL	TK70 HDG	TK80 HDG	TK110 HDG	TK120 HDG	TK88 HDG	TK88 HDGE
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE

ELECTRICAL & MISC:							
00091	4-pole female electrical socket wired to clearance light	65	65	65	65	65	65
00092	Side Clearance Lights / Pair	95	95	95	95	95	95
00093	Mid-turn signal (per pair)	120	120	120	120	120	120
00440	Remote flasher w/ battery back-up	310	310	310	310	310	310
06711	L.E.D. Lights (in lieu of standard)	560	560	560	560	560	560
00094	3rd Tail Light Package	120	120	120	120	120	120
06736	Strobe lights mounted in light channel	425	425	425	425	425	425
06737	Strobe light mounted on pedestal	320	320	320	320	320	320
06738	Revolving lights ILO strobe	55	55	55	55	55	55
05013	Flag holders (per pr.)	70	70	70	70	70	70
00253	PTO Wet Kit - Pump installation w/ air shift	2,115	2,115	2,115	2,115	2,115	2,115
00439	Factory install. gooseneck support plate (NET pricing)	560	560	560	560	560	560
00254	Factory installation of PTO/pump kit (NET)	640	640	640	640	640	640
06326	Stainless steel insert in tail channel	200	200	200	200	200	N/A
06083	Liquid filled air pressure gauge	135	135	135	135	135	135
	PAINT: See Trail King Color Chart						




TRAIL KING HYDRAULIC TAIL TRAILER "CUSTOM" SERIES

STANDARD EQUIPMENT

2 - 22,500 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 6.75 x 17.5 disc wheels 8-hole pilot mount, dual rims
 235/75R17.5 radial tires
 Oil seals
 Air ride suspension
 8' upper deck
 16" kingpin setting with 86" swing clearance
 12,000 lb. hydraulic winch with level wind
 (mounted on front of the upper deck)
 11'10" hydraulic tail with 46" fold-under
 14° load angle
 Tail raises to 58" dock height and lowers to the ground
 Hydraulic actuated tail lock
 Telescopic park stands
 Automatic slack adjusters

1 1/2" oak decking (raised) (NET)
 Flush apitong in tail 1 3/8" NET
 8" and 10" I-beam crossmembers on 12" centers
 Stake pockets 48" O.C.
 100,000/80,000 PSI yield strength steel construction
 102" overall deck width
 37" loaded deck height
 49" loaded 5th wheel height
 2 tool boxes in front of the upper deck
 3/16" floorplate over wheels and on fold-under
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness
 system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

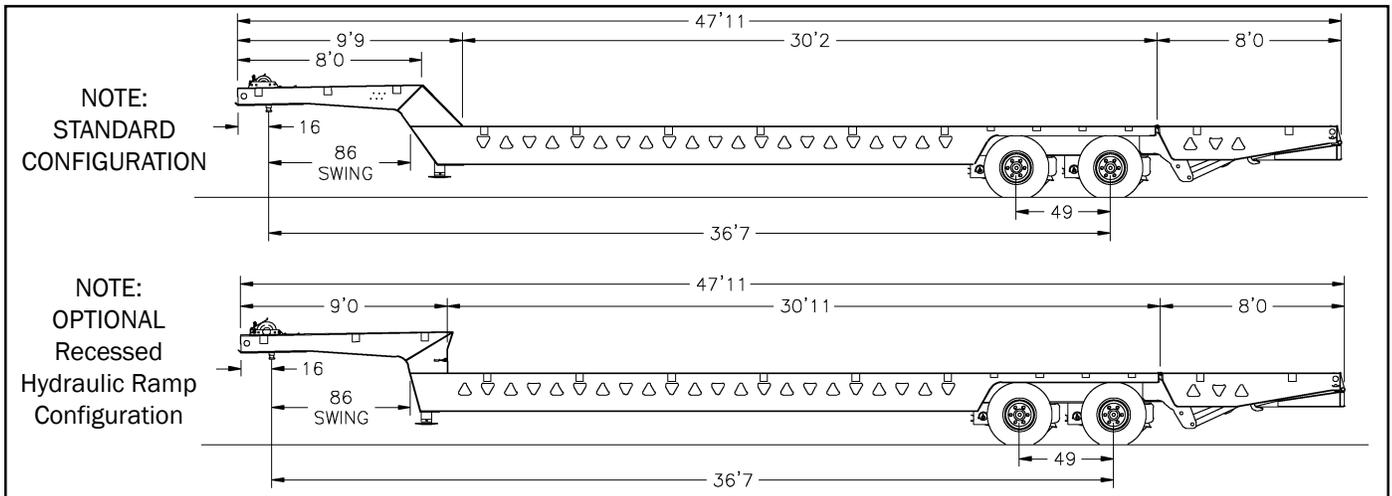

MODEL	LENGTH	11'10" TAIL W/46" FOLD-UNDER			
-------	--------	------------------------------	--	--	--

70,000 LB. CAPACITY
 50,000 LBS. CONCENTRATED IN 16'

		ITEM#	2S1M	ITEM#	4S2M
TK70HT	44'	00165	\$47,365	00166	\$47,710
TK70HT	45'	00167	\$48,335	00168	\$48,700
TK70HT	46'	00169	\$49,330	00170	\$49,685
TK70HT	48'	00171	\$51,280	00172	\$51,635

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC TAIL TRAILER "CUSTOM" SERIES

STANDARD EQUIPMENT

3 - 22,500 lb. axles
 12 1/4" x 7 1/2" air brakes
 6.75 x 17.5 disc wheels 8-hole pilot mount, dual rims
 235/75R17.5 radial tires
 Oil seals
 Air ride suspension
 8' upper deck
 16" kingpin setting with 74" swing clearance
 12,000 lb. hydraulic winch with level wind
 (mounted on front of the upper deck)
 11'10" hydraulic tail with 46" fold-under (tail raises to
 58" dock height and lowers to the ground)
 Hydraulic actuated tail lock
 Telescopic park stands
 1 1/2" oak decking (raised) (NET)
 Flush apitong in tail 1 3/8" NET

Automatic slack adjusters
 8" I-beam crossmembers on 12" centers
 100,000/80,000 PSI yield strength steel construction
 Stake pockets on 48" centers
 102" overall deck width
 37" loaded deck height
 49" loaded 5th wheel height
 2 tool boxes in front of the upper deck
 1/4" floorplate over wheels and on fold-under
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness
 system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

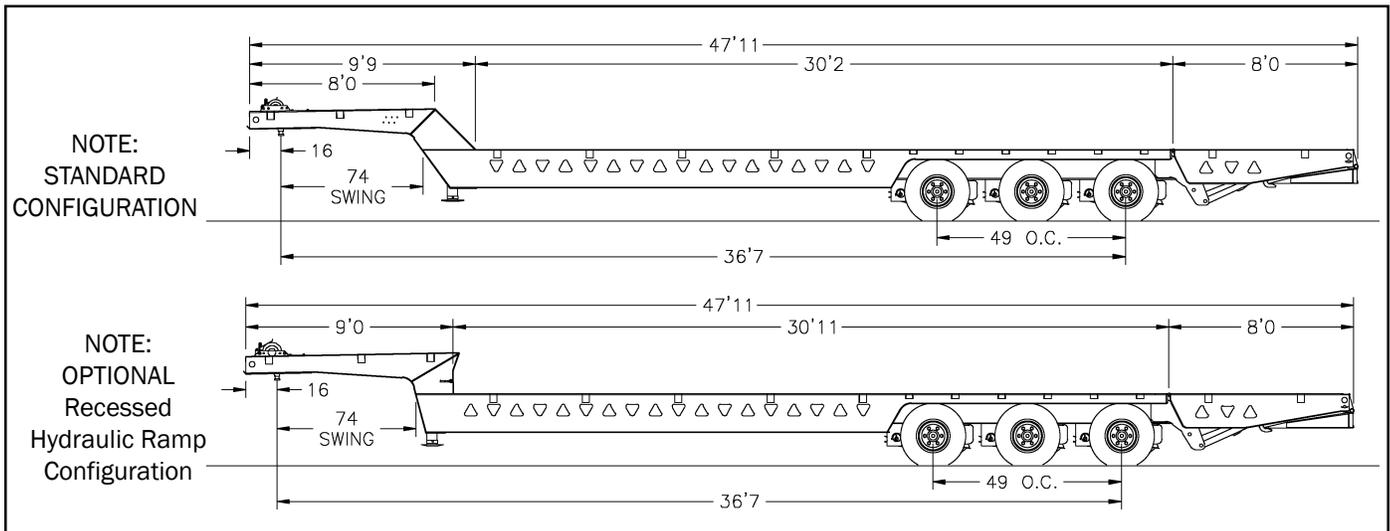

MODEL	LENGTH FOLD-UNDER	11'10" TAIL W/46"					
-------	----------------------	-------------------	--	--	--	--	--

*110,000 LB. UNIFORM CAPACITY
 70,000 LBS. CONCENTRATED IN 16'

		ITEM #	NO ABS	ITEM #	2S1M	ITEM#	4S2M
TK110HT	44'	05256	\$63,255	00173	\$64,895	00174	\$65,255
TK110HT	45'	05267	\$64,410	00175	\$66,060	00176	\$66,420
TK110HT	46'	05268	\$65,565	00177	\$67,215	00178	\$67,435
TK110HT	48'	05269	\$67,880	00179	\$69,520	00180	\$69,890

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC TAIL TRAILER "CUSTOM" SERIES

	MODEL	TK70HT	TK110HT
ITEM#	ITEM	PRICE	PRICE
	UPPER DECK:		
00181	2-speed park stands (crank curb side)	865	865
00182	Hydraulic park stands ILO standard	1,400	1,400
00184	20,000 lb. hydraulic winch ILO standard	2,280	2,280
00196	Winch guard	460	460
00197	Winch roller (Recessed)	310	310
00185	Deduct standard winch	(2,275)	(2,275)
06154	Winch mounted in slope of upperdeck	830	830
06155	*SCU mounted in slope of upperdeck (decreases swing clearance) (must include price for SCU)	1,340	1,340
00186	15 HP Kohler SCU (mounted above winch)	4,085	4,085
00187	24 HP Honda SCU (mounted above winch)	5,680	5,680
00188	Cover for self-contained unit	800	800
00189	2' front fold-down extensions (includes load bearing tool box lids)	830	830
00191	6' Hyd. recessed upper deck ramp (12" less than deck width)	4,130	4,130
06158	8' Hyd. recessed upper deck ramp (12" less than deck width, required with 6" double drop deck)	4,415	4,415
06323	10' hyd. recessed upper deck ramp (12" less than deck width, required with 12" double drop deck)	4,705	4,705
	MANUAL GOOSENECK RAMP OPTIONS		
00192	Ladder type ramps (60" long x 20"wide)	1,800	1,800
00193	Wood-filled ramps (60" long x 20"wide)	2,045	2,045
00194	Star traction ramps over steel (60" long x 20"wide)	2,665	2,665
00195	Bracket (only) for ramps	250	250
	HD OPTION PACKAGE:		
00199	50,000 lb. cap. concentrated in 16'	STD	N/A
00200	50,000 lb. cap. concentrated in 10'	1,445	N/A
00201	70,000 lb. cap. concentrated in 10'	N/A	965
00202	HD reinforced tail hinge (full width I-beam support)	1,975	1,975
	MAIN DECK:		
00203	8' deck width	(620)	
00204	8' deck width		(700)
00205	8'6" deck width	STD	0
00206	9' deck width	915	
00208	9' deck width		1,070
00209	10' deck width	3,070	
00210	10' deck width		3,130
00045	D-rings (Ea.)	50	50
00046	Recessed d-rings (ea)	65	65
05006	Stake pockets on 24" centers	585	585
02236	Stake pockets (ea.)	60	60
00212	1 1/2" oak decking (raised) (NET) w/1 3/4" raised apitong in tail	215	215
00213	1 3/8" apitong deck (raised or flush) (NET) w/ flush apitong in tail	1,165	1,165

*Must include price for SCU.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING HYDRAULIC TAIL TRAILER "CUSTOM" SERIES

	MODEL	TK70HT	TK110HT
ITEM#	ITEM	PRICE	PRICE
MAIN DECK CONTINUED...			
00214	4-way steel plate over wood	1,925	1,925
00216	3/16" floor plate over wheels only	STD	N/A
00218	3/16" floor plate over wheels & fold-under	STD	N/A
00219	1/4" floor plate over wheels only	495	STD
00221	1/4" floor plate over wheels & fold-under	725	STD
00224	Star traction material over steel on 11'10" hyd. tail and fold-under	1,090	1,090
00225	Star traction material over steel on 46" fold-under section only	425	425
00226	Traction aids on steel tail or outside 28" with wood center	800	800
00227	Crossmembers on 8" centers on main deck (N/A with triangle cut outs)	750	
00228	Crossmembers on 8" centers on main deck (N/A with triangle cut outs)		925
00230	Crossmembers on 12" centers on main deck	0	STD
00232	Double drop deck, 6" drop approx 10° angle	2,990	2,990
00233	12" swing-out outriggers without planks - 44'	3,290	3,290
00234	12" swing-out outriggers without planks - 45'	3,480	3,480
00235	12" swing-out outriggers without planks - 46'	3,650	3,650
00236	12" swing-out outriggers without planks - 48'	4,025	4,025
00237	3-way side extensions for 44' trailer length	9,575	9,575
00238	3-way side extensions for 45' trailer length	9,970	9,970
00239	3-way side extensions for 46' trailer length	10,370	10,370
00240	3-way side extensions for 48' trailer length	11,165	11,165
SUSPENSION:			
00241	Spring suspension ILO standard (Deck height decreases 1" and decreases load angle)	(4,135)	
00242	Spring suspension ILO standard (Deck height decreases 1" and (Deck height decreases 1" and decreases load angle)		(6,195)
05007	Lowering kit (both axles)	385	385
AXLES & BRAKES:			
00244	3rd axle on spring suspension	6,660	STD
00245	3rd axle on air-ride suspension (must add air ride for trailer also)	8,730	N/A
06325	Air lift front axle (tires must be smaller; must be 3-axle)	1,690	1,690
00079	Spring brakes (per axle - minimum: 2 axles)		195
TIRES & WHEELS:			
00081	6.75 x 17.5 disc wheels 8-hole pilot mount	0	0
00246	7.5 x 22.5 disc wheels	N/C	N/C
07758	235/75R 17.5 16PR	0	0
00248	255/70R 22.5 (per tire) (Deck height increases 1 1/2" and increases load angle)	(31)	(31)



TRAIL KING HYDRAULIC TAIL TRAILER "CUSTOM" SERIES

	MODEL	TK70HT	TK110HT
ITEM#	ITEM	PRICE	PRICE

ELECTRICAL:			
07190	Winch remote control socket at rear with 50' cable	1,485	1,485
07191	Wireless remote	1,295	1,295
00251	Additional socket for remote at front of trl	145	145
00092	Side Clearance Lights / Pair	95	95
00093	Mid-turn signal (per pair)	120	120
00094	3rd Tail Light Package	120	120
07792	Recessed working lights in GN drop w/ switch (per pair)	176	176
06711	L.E.D. Lights (in lieu of standard)	560	560
MISCELLANEOUS:			
06324	Dual side hydraulic controls	385	385
00252	Auxiliary air outlet at rear of trailer	275	275
00253	PTO Wet Kit - Pump installation w/ air shift	2,115	2,115
00254	Factory installation of PTO/pump kit (NET)	640 NET	640 NET
00255	Snatch block with dead post	580	580
00256	6' aluminum incline assist ramps (for tail)	3,640	3,640
00257	8' aluminum incline assist ramps (for tail)	3,360	3,360
06083	Liquid filled air pressure gauge	135	135
	PAINT: See Trail King Color Chart		




TRAIL KING FOLDING GOOSENECK TRAILERS FG SERIES

STANDARD EQUIPMENT

2 - 22,500 lb. axles
 16½" x 7" air brakes
 *Anti-lock brake system
 8.25 x 22.5 disc wheels
 255/70R 22.5 16PR radial tires (H)
 Oil seals
 Air ride suspension
 10' 2" gooseneck with 93" swing clearance
 16" kingpin setting
 Full width folding gooseneck (has the ability to lift
 10,000 lbs. on the gooseneck)
 Folding neck does not require ground bearing pads for
 lifting
 Air-activated transport lock and safety pins
 Double drop deck
 Automatic slack adjusters

1½" oak decking (raised) (NET)
 10" I-beam crossmembers on 24" centers
 MF-80 or T-1 equivalent steel construction
 4-beam main frame construction
 102" overall deck width
 26" loaded deck height
 50" loaded 5th wheel height
 14 D-rings
 Swing-out outriggers
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness
 system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

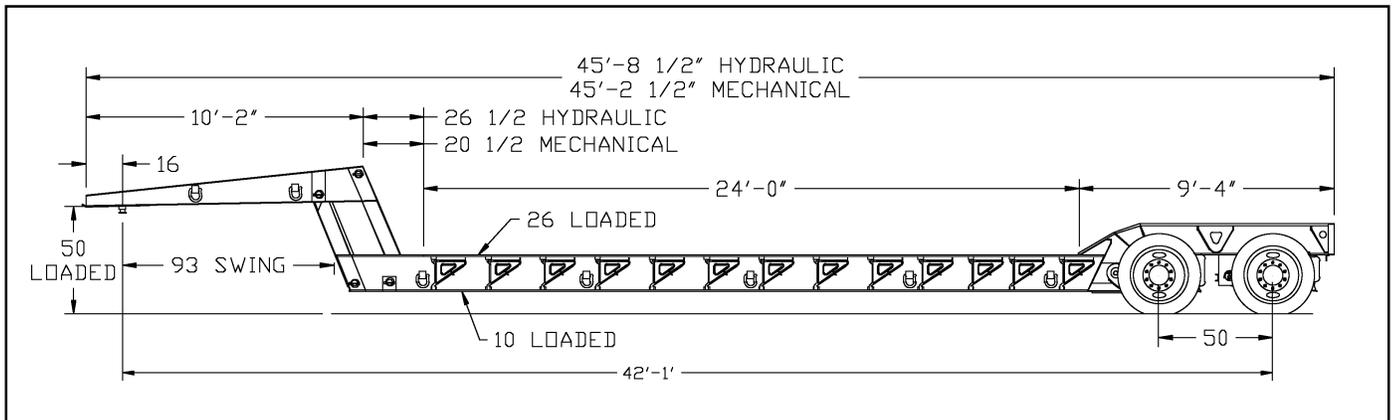

MODEL	LENGTH	DECK LENGTH	ITEM #	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------------	--------	------------	--------	------------

70,000 LBS. CONCENTRATED IN 16'

TK70FG	41' 8 1/2"	20'	00443	\$64,145	00444	\$64,520
TK70FG	43' 8 1/2"	22'	00445	\$65,520	00446	\$65,750
TK70FG	45' 8 1/2"	24'	06398	\$66,890	06399	\$66,975

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING FOLDING GOOSENECK TRAILERS FG SERIES

STANDARD EQUIPMENT

- | | |
|---|--|
| 3 - 22,500 lb. axles | 1 1/2" oak decking (raised) (NET) |
| 16 1/2" x 7" air brakes | 10" I-beam crossmembers on 24" centers |
| *Anti-lock brake system | MF-80 or T-1 equivalent steel construction |
| 8.25 x 22.5 disc wheels | 4-beam main frame construction |
| 255/70R 22.5 16PR radial tires (H) | 102" overall deck width |
| Oil seals | 26" loaded deck height |
| Air ride suspension | 50" loaded 5th wheel height |
| 10' 2" gooseneck with 93" swing clearance | 14 D-rings |
| 16" kingpin setting | Mid-turn signal/clearance light |
| Full width folding gooseneck (has the ability to lift 10,000 lbs. on the gooseneck) | Rubber mounted sealed lights and sealed harness system |
| Folding neck does not require ground bearing pads for lifting | Electrical system per DOT regulations |
| Air-activated transport lock and safety pins | 7-pole electrical socket |
| Double drop deck | Mud flaps |
| Automatic slack adjusters | Red & white conspicuity markings |
| | Color: Trail King 2-part polyurethane |

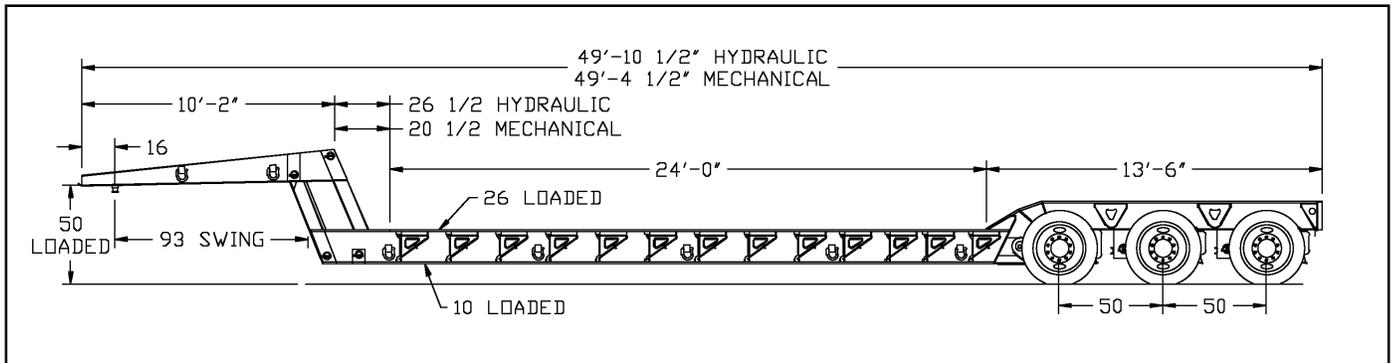

MODEL	LENGTH	DECK LENGTH	ITEM #	NO ABS	ITEM #	W/ABS 2S1M	ITEM#	W/ABS 4S2M
-------	--------	-------------	--------	--------	--------	------------	-------	------------

80,000 LBS. CONCENTRATED IN 16'

TK80FG	45' 10 1/2"	20'			00449	\$75,885	00450	\$76,270
TK80FG	47' 10 1/2"	22'			00451	\$77,340	00452	\$77,715
TK80FG	49' 10 1/2"	24'			06400	\$78,800	06401	\$79,170

**110,000 LB. UNIFORM CAPACITY
100,000 LBS. CONCENTRATED IN 16'

TK110FG	45' 10 1/2"	20'	05260	\$76,650	00455	\$78,375	00456	\$78,740
TK110FG	47' 10 1/2"	22'	05261	\$78,040	00457	\$79,770	00458	\$80,140
TK110FG	49' 10 1/2"	24'	06402	\$79,430	06403	\$81,160	06404	\$81,530

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING FOLDING GOOSENECK TRAILERS FG SERIES

	MODEL	TK70FG	TK80FG	TK110FG
ITEM#	ITEM	PRICE	PRICE	PRICE
	GOOSENECK:			
00459	13' hydraulic gooseneck w/127" swing clearance	N/A	3,645	3,645
06360	Knife edge (adds to OAL)	375	375	375
00330	Additional kingpin settings (Ea.) (specify setting)	455	455	455
	Optional 5th wheel height	CONSULT FACTORY		
00332	8 1/2 HP Kohler self-contained power unit	3,250	3,250	3,250
00333	13 HP Honda self-contained power unit	3,265	3,265	3,265
00334	15 HP Kohler self-contained power unit	4,230	4,230	4,230
00460	10' 2" mechanical (winch) gooseneck ILO standard	(4,750)	(4,750)	(4,750)
	MAIN DECK:			
00461	8' deck width	(1,520)	(1,520)	(1,520)
00343	8'6" deck width	0	0	0
00463	9' deck width	2,100		
00464	9' deck width		3,075	3,075
00533	Level deck (single drop)	0	0	0
00465	1 3/8" Apitong raised decking (net)	935	935	935
06286	1 3/4" Apitong raised decking (net)	1,200	1,200	1,200
00355	12" standard swing-out outriggers (Ea.)	105	105	105
00356	Heavy duty swing-out outriggers (ea)	155	155	155
00469	Less STD 12" swingouts on 20' load deck	(1,570)	(1,570)	(1,570)
06847	Less std. 12" swing-outs on 22' load deck	(1,720)	(1,720)	(1,720)
06850	Less std. 12" swing-outs on 24' load deck	(1,860)	(1,860)	(1,860)
00362	Swing-out brackets only (Ea.)	50	50	50
00474	12" removable flat back outrigger on 20' deck	0	0	0
00475	12" removable flat back outrigger on 22' deck	0	0	0
00473	12" removable flat back outrigger on 24' deck	0	0	0
00472	12" removable flat back outriggers (Ea.)	105	105	105
00046	Recessed d-rings (ea)	65	65	65
00045	D-rings (Ea.)	50	50	50
	HEAVY DUTY PACKAGE:			
00366	I-beam style bolsters (include full depth crossmembers in wheel area)	780		
00367	I-beam style bolsters (include full depth crossmembers in wheel area)		1,155	1,155
00368	70,000 lbs capacity concentrated in 10'	435		
00480	80,000 lbs. concentrated in 10'		590	
00370	100,000 lbs. capacity concentrated in 10' (inc. 1 3/4" apitong)			1,625
06009	110,000 lb. capacity concentrated in 16'			880
06010	110,000 lbs. concentrated in 10' (inc. 1 3/4" apitong)			3,755
00372	Top flange reinforcement	625	625	625
	FRAME REINFORCEMENT:			
00423	Frame reinforcing for flip axle 0000	N/A	1,685	1,685
00425	Frame reinforcing for single axle booster 000-0	N/A	2,125	2,125
00429	Brackets, electrical, and air connections for future flip (Must order proper frame reinforcement). Frame reinforcement does not include brackets, electrical or air connections.	755	755	755
	Maximum # of axles in any configuration	2	4	4



TRAIL KING FOLDING GOOSENECK TRAILERS FG SERIES

	MODEL	TK70FG	TK80FG	TK110FG
ITEM#	ITEM	PRICE	PRICE	PRICE
	WHEEL AREA:			
00374	Half front bolster	STD	STD	STD
00483	Full height front bolster	1,000	1,000	1,000
00376	Removable wheel covers (per axle)(tapered/squared)	950	950	950
00485	Full width steel covered rear deck (does not include boom trough)	2,195		
00486	Full width steel covered rear deck (does not include boom trough)		2,865	2,865
06396	Steel over wheels w/ 10 ga. bolted in bottom of boom trough with 25° slope to load deck. Adds 1' to OAL.	2,980		
06397	Steel over wheels w/ 10 ga. bolted in bottom of boom trough with 25° slope to load deck. Adds 1' to OAL.		3,640	3,640
00379	10 ga. floor plate bolted in bottom of boom	345		
00380	10 ga. floor plate bolted in bottom of boom		420	420
00381	60" rear load ramps (wood-filled)	1,640	1,640	1,640
00382	Less bolsters between wheels	(675)		
00383	Less bolsters between wheels		(1,005)	(1,005)
00493	54" axle spacing Spring susp. (adds to OAL)	N/A	1,065	N/A
00386	54" axle spacing Air-ride susp.(adds to OAL)	915		
00387	54" axle spacing Air-ride susp.(adds to OAL)		965	
00388	54" axle spacing Air-ride susp.(adds to OAL)			995
00390	60" axle spacing (adds to OAL) - Hutch 7700 spring suspension	995		
00391	60" axle spacing (adds to OAL) - Hutch 7700 spring suspension		2,315	N/A
00392	60" axle spacing Air-ride susp. (adds to OAL)	1,180		
00393	60" axle spacing Air-ride susp. (adds to OAL)		1,925	
00394	60" axle spacing Air-ride susp. (adds to OAL)			1,975
00396	Detachable Wheel Area	4,955	4,955	4,955
00398	30" beavertail (adds 13" to OAL)	965	965	965
	SUSPENSION:			
00504	Multi-leaf spring suspension	(4,025)	CONSULT FACTORY	
00401	Air-ride suspension	0	0	0
00402	Single point suspension	1,860	N/A	N/A
00508	TR8600 suspension (or equivalent)	N/A	(2,450)	(2,450)
00509	TR8750 suspension (or equivalent)	N/A	(1,490)	(1,490)
00691	25,000 lb. axles (actual axle capacity may vary due to suspension)	270		
06437	25,000 lb. axles (per axle)		140	140
00075	Air-ride raising and lowering valve	550	550	550
	AXLES & BRAKES:			
	Flip axle with air-ride suspension, standard tires, axles, and all connections (Must add needed frame reinforcement (adds to OAL)			
00405	8' wide flip axle	N/A	12,490	12,490
00407	8' 6" wide flip axle	N/A	12,720	12,720
00409	9' wide flip axle	N/A	13,120	13,120
00411	10' wide flip axle	N/A	13,675	13,675
00413	Deduct to make flip axle fixed	N/A	(1,230)	(1,230)
00414	Rear load-bearing tail channel for flip axles	N/A	700	700



TRAIL KING FOLDING GOOSENECK TRAILERS FG SERIES

	MODEL	TK70FG	TK80FG	TK110FG
ITEM#	ITEM	PRICE	PRICE	PRICE
AXLES & BRAKES CONTINUED...				
00417	Tension bolts for loadbearing flip axle (required for point loading flip)	N/A	425	425
00418	3rd flip axle in lieu of 3rd fixed axle (third must be on air)	N/A	2,115	2,115
00419	Deduct 3rd axle (Trailer must have air-ride)	N/A	(8,875)	(8,875)
00076	Spring brakes (STD w/ ABS)	STD	STD	0
00077	Spring brakes (per axle - minimum: 2 axles)			195
00420	Dust Shields (per axle)	105	105	105
00422	Air lift rear axle (w/ dual ride height-deletes spring brakes)	N/A	1,690	1,690
TIRES & WHEELS:				
00081	6.75 x 17.5 disc wheels 8-hole pilot mount	N/C	N/C	N/C
00084	8.25 x 22.5 disc wheels	0	0	0
00090	255/70R 22.5 - 16PR radial tires	0	0	0
00432	11R 22.5-14PR radial tires (per tire)	67	67	67
00434	11R 22.5-16PR radial tires (H) (per tire)	90	90	90
00437	275/70R 22.5 - 16PR radial tires (per tire)	73	73	73
ELECTRICAL				
00091	4-pole female electrical socket wired to clearance light	65	65	65
06711	L.E.D. Lights (in lieu of standard)	560	560	560
00092	Side Clearance Lights / Pair	95	95	95
00093	Mid-turn signal (per pair)	120	120	120
00094	3rd Tail Light Package	120	120	120
00440	Remote flasher w/ battery back-up	310	310	310
MISCELLANEOUS:				
05013	Flag holders (per pr.)	70	70	70
00253	PTO Wet Kit - Pump installation w/ air shift	2,115	2,115	2,115
00254	Factory installation of PTO/pump kit (NET)	640 NET	640 NET	640 NET
06326	Stainless steel insert in tail channel	200	200	200
	PAINT: See Trail King Color Chart			




TRAIL KING HYDRAULIC BOOSTER

STANDARD EQUIPMENT

25,000 lb. axles
 16½" x 7" air brakes
 8.25 x 22.5 disc wheels
 275/70R22.5 radial tires 16 ply
 Oil seals
 Trail King walking beam suspension (on HB2 only)
 14' 1" axle spacing from center of the last axle on the trailer to the first axle on the booster

Drop-leg jack
 102" overall deck width
 5½ HP Honda SCU
 Rubber mounted sealed lights and sealed harness system
 Electrical system per DOT regulations
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

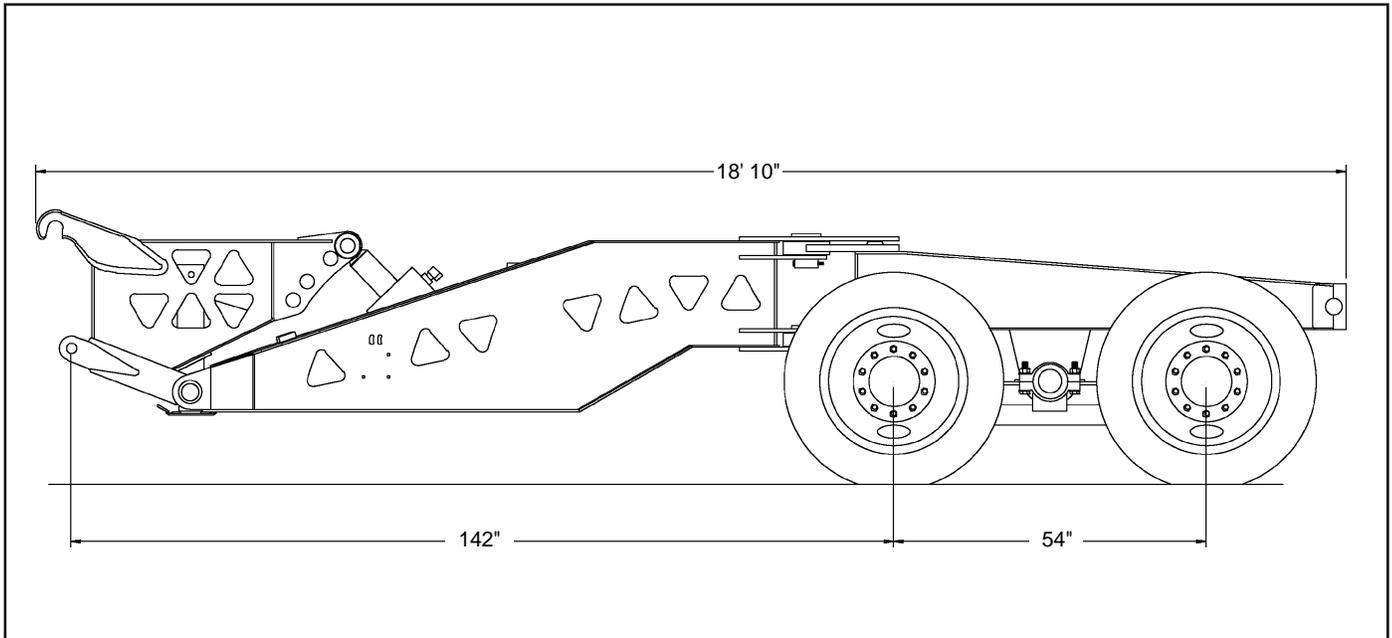

MODEL	ITEM#	W/ABS 2S1M	ITEM#	W/ABS 4S2M
TKHB1 - 1 AXLE 50,000 lb. CAPACITY	07185	\$39,065	07647	\$39,435
TKHB2 - 2 AXLE 50,000 lb. CAPACITY	06535	\$55,330	07648	\$55,710

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK18HT INDUSTRIAL TRAILER HT SERIES

STANDARD EQUIPMENT

2 - 9,000 lb. axles
 12 1/4" x 3 3/8" electric brakes
 Tandem dual disc wheels (8-hole)
 235/85R x 16 radials
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 10 D-rings
 96" deck width
 28' deck length

PTO hydraulics
 35" loaded deck height
 9" hydraulic fold-down approach plate and underride protection
 10'5" hydraulic tail w/dual acting cylinder
 12,000 lb. drop leg jack
 Gooseneck hitch w/inverted 5th wheel
 Breakaway switch (less wet cell battery)
 Electrical system per DOT regulations
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

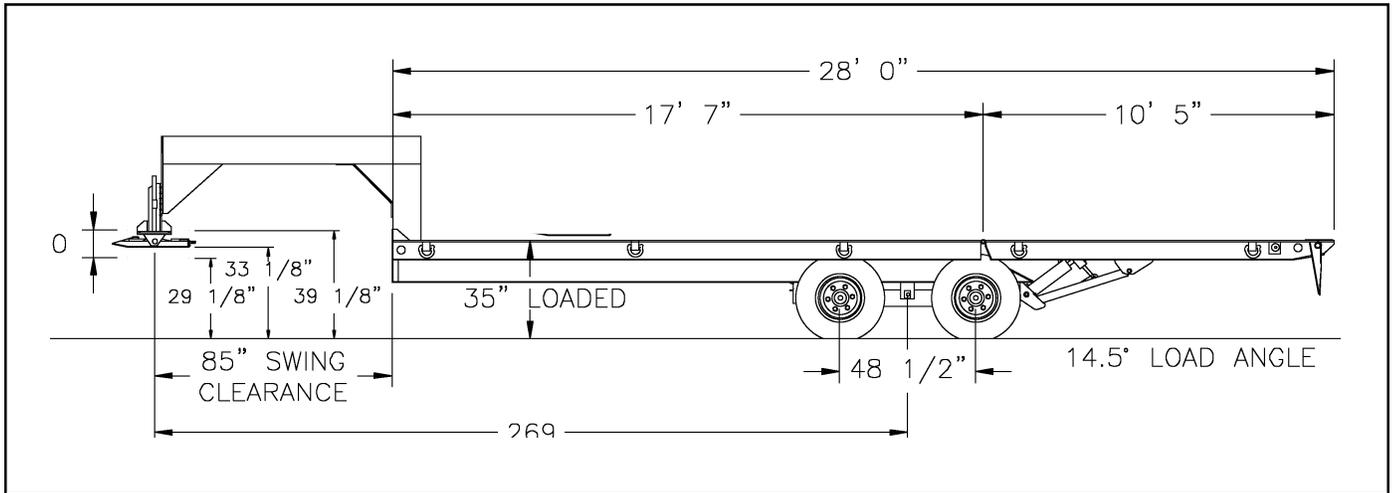

MODEL	LENGTH	ITEM#	RETAIL
TK18HT			
18,000 LB. CAPACITY	28'	00095	\$22,795

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK20HT INDUSTRIAL TRAILER HT SERIES

STANDARD EQUIPMENT

2 - 10,000 lb. axles
 12 1/4" x 4" electric brakes
 Tandem dual disc wheels (8-hole)
 235/85R x 16 radials
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 10 D-rings
 96" deck width
 28' deck length

PTO hydraulics
 35" loaded deck height
 9" hydraulic fold-down approach plate and underride protection
 10'5" hydraulic tail w/dual acting cylinder
 12,000 lb. drop leg jack
 Gooseneck hitch w/inverted 5th wheel
 Breakaway switch (less wet cell battery)
 Electrical system per DOT regulations
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

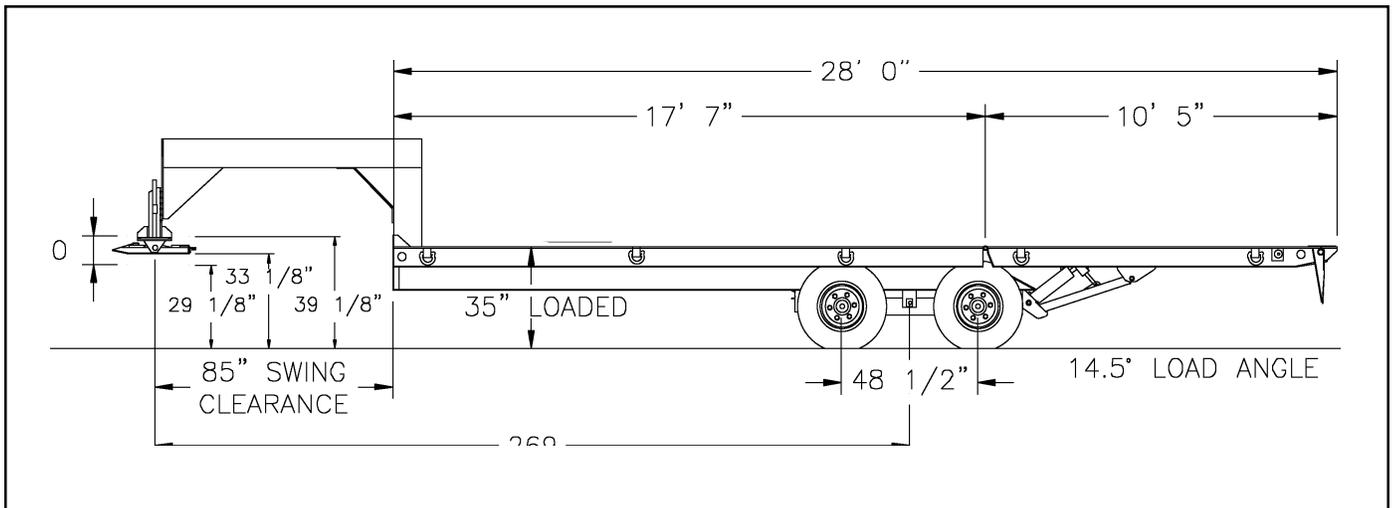

MODEL	LENGTH	ITEM#	RETAIL
TK20HT 20,000 LB. CAPACITY	28'	00096	\$24,725

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK24HT INDUSTRIAL TRAILER HT SERIES

STANDARD EQUIPMENT

2 - 12,000 lb. axles
 12 1/4" x 5" electric brakes
 Tandem dual disc wheels (8-hole)
 235/85R x 16 radials
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 10 D-rings
 96" deck width
 28' deck length

PTO hydraulics
 35" loaded deck height
 9" hydraulic fold-down approach plate and underride protection
 10'5" hydraulic tail w/dual acting cylinder
 12,000 lb. drop leg jack
 Gooseneck hitch w/inverted 5th wheel
 Breakaway switch (less wet cell battery)
 Electrical system per DOT regulations
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

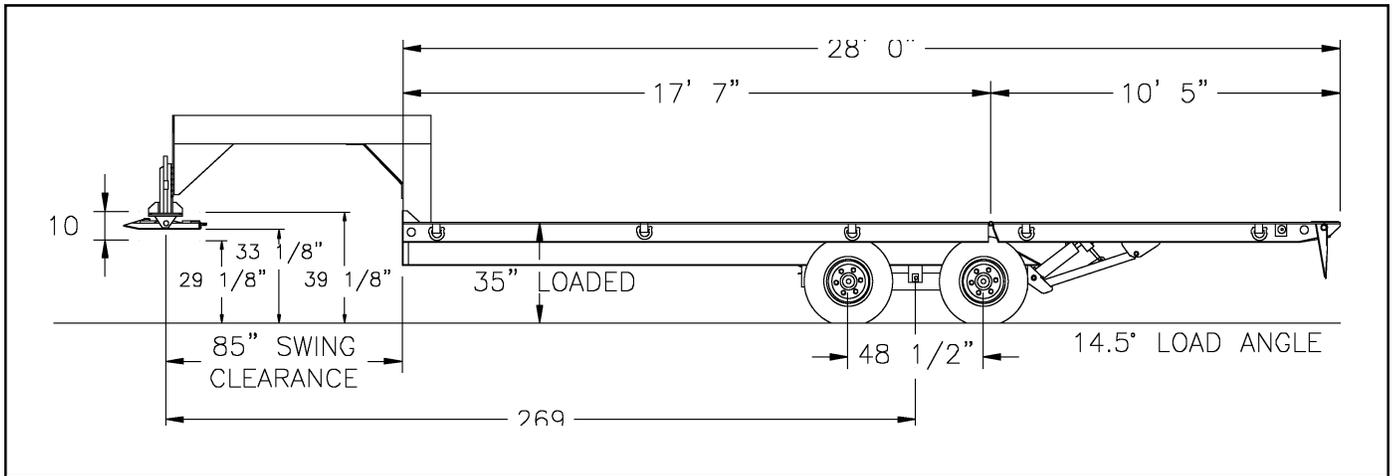

MODEL	LENGTH	ITEM#	RETAIL
TK24HT 24,000 LB. CAPACITY	28'	00097	\$25,845

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK40HT INDUSTRIAL TRAILER HT SERIES

STANDARD EQUIPMENT

2 - 20,000 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 Disc wheels 8-hole pilot mount, dual rims
 235/75R17.5 radial tires
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 10 D-rings
 96" deck width
 3-leaf spring suspension

PTO hydraulics
 Automatic slack adjusters
 28' deck length
 36" loaded deck height
 9" hydraulic fold-down approach plate and underride protection
 10'5" hydraulic tail w/dual acting cylinder
 12,000 lb. parking jack w/tool box
 Pintle eye hitch
 Electrical system per DOT regulations
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

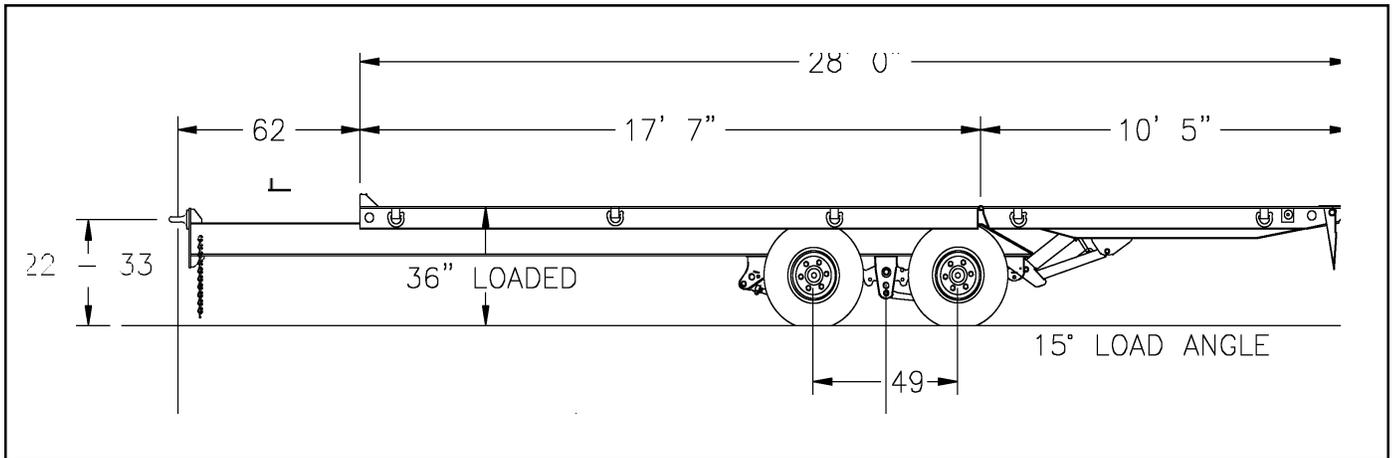

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------	---------------	--------	---------------

TK40HT 40,000 LB. CAPACITY	28'	00098	\$28,080	00099	\$28,435
-------------------------------	-----	-------	----------	-------	----------

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING LIGHT INDUSTRIAL HYDRAULIC TAIL TRAILERS OPTIONS

	MODEL	TK18HT	TK20HT	TK24HT	TK40HT
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE
	HITCH:				
06276	3" pintle hitch	(1,565)	(1,565)	(1,565)	
00100	3" pintle hitch				0
00101	Tube arch gooseneck w/ mini-5th wheel (2" KP)	0	0	0	N/A
00102	2" kingpin plate (for truck)	460	460	460	N/A
00103	Platform for tube arch gooseneck	1,160	1,160	1,160	
06714	Narrow gooseneck 9'2" long w/ 78" swing	2,715	2,715	2,715	
00104	Narrow gooseneck 9'2" long w/ 78" swing				4,270
02045	Lockable tool box	N/A	N/A	N/A	0
00106	Enclosed tongue (expanded metal)	N/A	N/A	N/A	120
	DECK:				
00125	8'6" deck width	460	460	460	
00126	8'6" deck width				535
00128	1 3/8" apitong deck (net)	965	965	965	965
00129	Steel deck ILO standard (10 gauge floor plate)	1,245	1,245	1,245	1,245
00130	3/16" steel over wheels	355	355	355	355
00131	Star traction on tail	855	855	855	855
00132	Traction aids on tail	500	500	500	500
00133	*8,000 lb. electric winch, mounted in deck	2,535	2,535	2,535	2,535
00134	*8,000 lb. hydraulic winch (PTO required), mounted in deck	2,575	2,575	2,575	2,575
00135	*12,000 lb. hydraulic winch (PTO required), mounted in deck	3,245	3,245	3,245	3,245
00136	Spare tire mount on gooseneck	140	140	140	140
00045	D-rings (Ea.)	50	50	50	50
02236	Stake pockets (ea.)	60	60	60	60
00138	Recessed D-rings ILO D-rings	220	220	220	220
00046	Recessed d-rings (ea)	65	65	65	65
	BRAKES:				
00107	Electric brakes	0	0	0	N/A
00110	2S1M ABS air-brakes(Must have H.D. axles)	N/A	2,450		
05036	4S2M ABS air-brakes (must include H.D. axle)	N/A	2,865		
00111	2S1M ABS air-brakes	N/A		2,930	
05037	4S2M ABS air-brakes	N/A		3,360	
00116	Electric cab control kit	220	220	220	N/A
	TIRES:				
02240	235/85R16 radial	0	0	0	N/A
07758	235/75R 17.5 16PR	N/A	N/A	N/A	0
00248	255/70R 22.5 (per tire)	N/A	N/A	N/A	(31)
00122	Disc wheels - 16	0	0	0	
00123	Disc wheels - 17.5 8 hole pilot mount				STD
00124	Disc wheels - 22.5	N/A	N/A	N/A	N/C
	MISCELLANEOUS:				
00139	Electric/hydraulic system for tail - operated off power cord from tow vehicle Operated off power cord from tow vehicle	1,990	1,990	1,990	1,990
	PAINT: See Trail King Color Chart				

*Winches mounted in deck behind gooseneck.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING MECHANICAL DETACHABLE GOOSENECK TRAILERS MDG SERIES

STANDARD EQUIPMENT

- | | |
|--|---|
| <ul style="list-style-type: none"> 2 - 22,500 lb. axles 16½" x 7" air brakes *Anti-lock brake system 8.25 x 22.5 disc wheels 255/70R 22.5 16PR radial tires (H) Oil seals Air ride suspension 10' mechanical detachable gooseneck with 77" swing clearance 16" kingpin setting Front guide rollers
(Truck frame rails required for operation) 2" nominal oak decking (raised) (1½" NET) 10" I-beam crossmembers on 24" centers | <ul style="list-style-type: none"> Automatic slack adjusters 100,000/80,000 PSI yield strength steel construction Pierced side beams 102" overall deck width 24" loaded deck height 50" loaded 5th wheel height Mid-turn signal/clearance light Rubber mounted sealed lights and sealed harness system Electrical system per DOT regulations 7-pole electrical socket Mud flaps Red & white conspicuity markings Color: Trail King 2-part polyurethane |
|--|---|

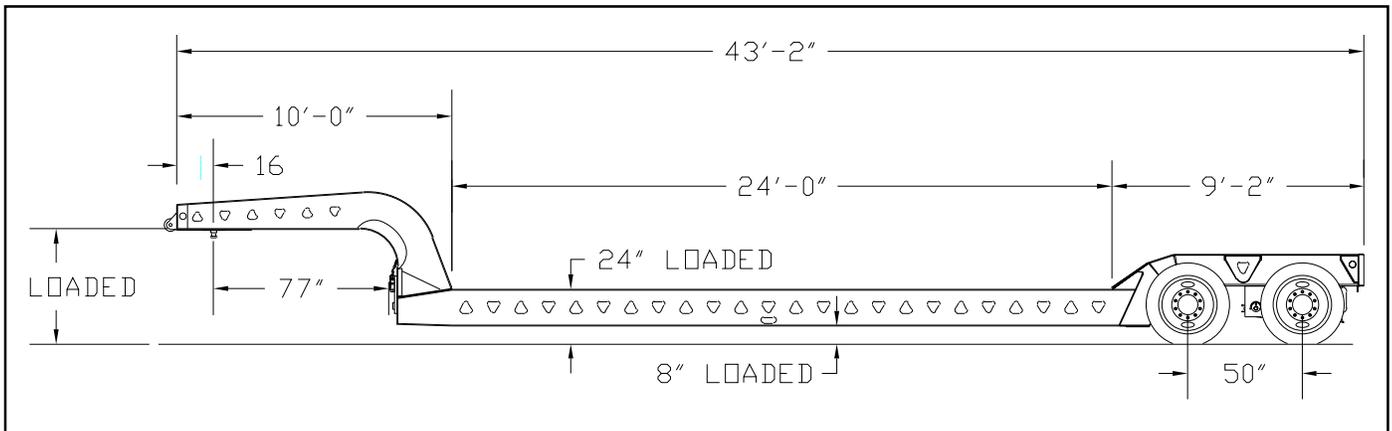

MODEL	LENGTH	DECK LENGTH	ITEM #	W/ABS 2S1M	ITEM #	W/ABS 4S2M
70,000 LBS. CONCENTRATED IN 16'						
TK70MDG	37' 2"	18'	00928	\$45,060	00932	\$45,435
TK70MDG	39' 2"	20'	00929	\$46,110	00933	\$46,485
TK70MDG	41' 2"	22'	00930	\$47,165	00934	\$47,525
TK70MDG	43' 2"	24'	00931	\$48,215	00935	\$48,570

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING MECHANICAL DETACHABLE GOOSENECK TRAILERS MDG SERIES

STANDARD EQUIPMENT

3 - 22,500 lb. axles
 16½" x 7" air brakes
 *Anti-lock brake system
 8.25 x 22.5 disc wheels
 Outboard 10-hole pilot mount
 255/70R 22.5 16PR radial tires (H)
 Oil seals
 Air ride suspension
 10' mechanical detachable gooseneck with 77" swing clearance
 16" kingpin setting
 2" nominal oak decking (raised) (1½" NET)
 10" I-beam crossmembers on 24" centers

Automatic slack adjusters
 100,000/80,000 PSI yield strength steel construction
 Pierced side beams
 102" overall deck width
 24" loaded deck height
 50" loaded 5th wheel height
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

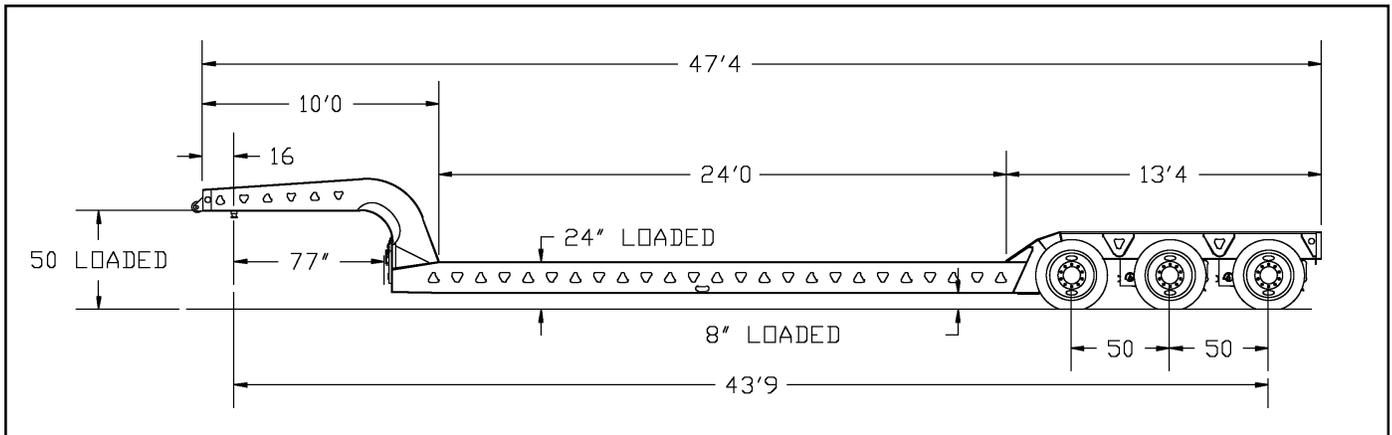

MODEL	LENGTH	DECK LENGTH	ITEM #	NO ABS	ITEM #	W/ABS 2S1M	ITEM#	W/ABS 4S2M
-------	--------	-------------	--------	--------	--------	------------	-------	------------

80,000 LBS. CONCENTRATED IN 16'

TK80MDG	43' 4"	20'			00936	\$57,480	00942	\$57,850
TK80MDG	45' 4"	22'			00937	\$58,610	00943	\$58,965
TK80MDG	47' 4"	24'			00938	\$59,735	00944	\$60,105

**110,000 LB. UNIFORM CAPACITY
 100,000 LBS. CONCENTRATED IN 16'

TK110MDG	43' 4"	20'	05270	\$58,150	00939	\$59,845	00945	\$60,210
TK110MDG	45' 4"	22'	05271	\$59,490	00940	\$61,175	00946	\$61,540
TK110MDG	47' 4"	24'	05272	\$62,230	00941	\$63,915	00947	\$64,285

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

**Although not necessary on 110,000 capacity trailers, Trail King highly recommends the use of anti-lock brake systems.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008


TRAIL KING MECHANICAL DETACHABLE GOOSENECK TRAILERS MDG SERIES

16-WHEEL TRUNNION AXLE

STANDARD EQUIPMENT

4 - 20,000 lb. axles
 12 1/4" x 5" air brakes
 6.75 x 17.5-6 disc wheels, 6-hole pilot mount, dual rims
 215/75R 17.5 16PR radial tires (H)
 Oil seals
 69" trunnion walking beam suspension
 10' perimeter frame gooseneck with 77" swing clearance
 16" kingpin setting
 Front guide rollers
 (Truck frame rails required for operation)
 2" nominal oak decking (raised) (1 1/2" NET)
 10" I-beam crossmembers on 12" centers
 100,000/80,000 PSI yield strength steel construction

2-beam high strength construction
 Pierced side beams
 27" beavertail (steel with traction aids)
 102" overall deck width
 120" expandable wheel area (MDGE only)
 24" loaded deck height
 50" loaded 5th wheel height
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

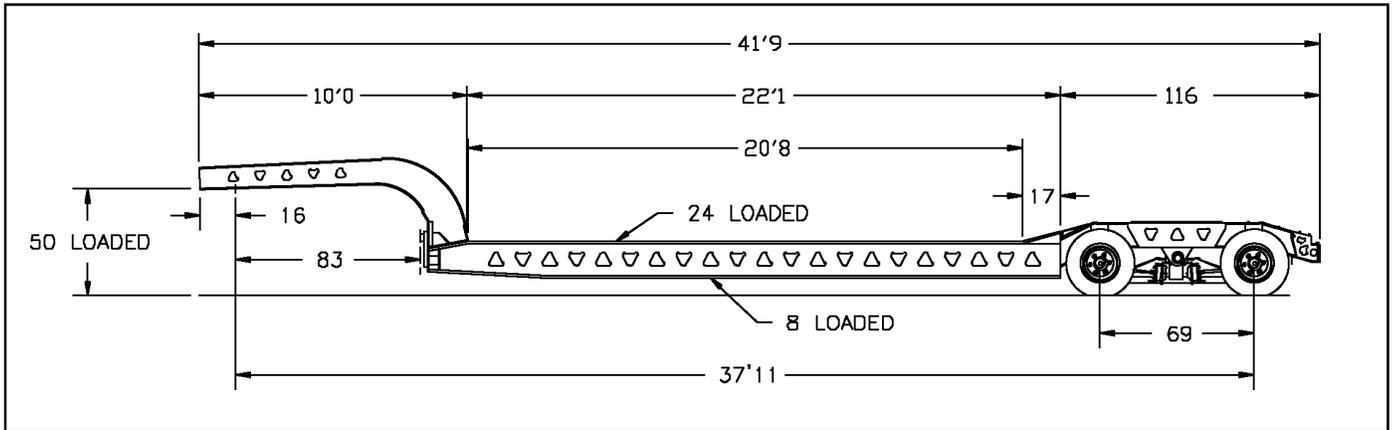

MODEL	LENGTH	KINGPIN	DECK LENGTH	ITEM #	RETAIL
(EXPANDABLE WHEEL AREA)					
88,000LB. CAPACITY					
TK88MDGE	41' 9"	37' 11"	20' 8"	00951	\$70,330
TK88MDGE	43' 9"	39' 11"	22' 8"	00952	\$71,470
TK88MDGE	45' 9"	41' 11"	24' 8"	00953	\$72,070

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING MECHANICAL DETACHABLE GOOSENECK TRAILERS MDG SERIES

	MODEL	TK70MDG	TK80MDG	TK110MDG	TK88MDG 16 WHEEL	TK88MDG EXPANDO	TK120MDG EXPANDO
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE
	MECHANICAL GOOSENECK						
00957	10' mech. gooseneck w/ 77" swing clear.	0	0	0	0	0	0
00958	11'9" mech. gooseneck w/ 98" swing clear.	N/A	1,250	1,250	N/A	N/A	N/A
00959	12'10" mech. gooseneck w/ 111" swing clear.	N/A	2,350	2,350	N/A	N/A	N/A
00960	18' mech. gooseneck w/ 173" swing clear. (Optional lengths add to OAL)	N/A	N/A	6,165	N/A	N/A	
00961	18' mech. gooseneck w/ 173" swing clear. (Optional lengths add to OAL)						0
00330	Additional kingpin settings (Ea.) (specify setting)	455	455	455	455	455	455
	Optional 5th wheel heights (above 50")	CONSULT FACTORY					
00963	Tool box in gooseneck	310	310	310	310	310	310
00964	Fenders for 10' gooseneck	1,165	1,165	1,165	N/A	N/A	N/A
00965	Fenders for 11'9" or 12'10" gooseneck	1,365	1,365	1,365	N/A	N/A	N/A
	MAIN DECK:						
00340	8' deck width	(445)					
00341	8' deck width		(645)	(645)	N/A	N/A	N/A
00343	8'6" deck width	0	0	0	0	0	0
00344	9' deck width	580					
00345	9' deck width		895	895			
00347	9' deck width				670	N/A	N/A
00348	10' deck width	1,475					
00349	10' deck width		2,190	2,190			
00351	10' deck width				1,320	N/A	N/A
00352	Drop side deck (24" center, 18" outside and 6" clearance)	1,665	1,665	1,665	N/A	N/A	N/A
00353	1 3/8" Apitong raised decking (net)	670	670	670	670	670	670
00354	1 3/4" Apitong raised decking (net)	920	920	920	920	920	920
00355	12" standard swing-out outriggers (Ea.)	105	105	105	105	105	105
00356	Heavy duty swing-out outriggers (ea)	155	155	155	155	155	155
00362	Swing-out brackets only (Ea.)	50	50	50	50	50	50
00980	12" remove. flat back outriggers (Ea.)	110	110	110	110	110	110
00981	12" remove. flat back outriggers - 18' deck	1,890	1,890	1,890	1,890	1,890	1,890
00982	12" remove. flat back outriggers - 20' deck	2,035	2,035	2,035	2,035	2,035	2,035
00983	12" remove. flat back outriggers - 22' deck	2,185	2,185	2,185	2,185	2,185	2,185
00984	12" remove. flat back outriggers - 24' deck	2,340	2,340	2,340	2,340	2,340	2,340
00361	Double outriggers (per pair)	460	460	460	460	460	460
00363	31" front loading ramp	965	965	965	965	965	N/A
07790	31" high capacity front loading ramp	N/A	N/A	N/A	N/A	N/A	1,555
00364	Center loading ramp (wood/steel)	780	780	780	780	780	780
00046	Recessed d-rings (ea)	65	65	65	65	65	65
00045	D-rings (Ea.)	50	50	50	50	50	50



TRAIL KING MECHANICAL DETACHABLE GOOSENECK TRAILERS MDG SERIES

	MODEL	TK70MDG	TK80MDG	TK110MDG	TK88MDG 16 WHEEL	TK88MDG EXPANDO	TK120MDG EXPANDO
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE
	HEAVY DUTY PACKAGE:						
00366	I-beam style bolsters (include full depth crossmembers in wheel area)	780					
00367	I-beam style bolsters (include full depth crossmembers in wheel area)		1,155	1,155	N/A	N/A	N/A
00368	70,000 lbs capacity concentrated in 10'	435					
00992	Trailer capacity concentrated in 10' option		590	590	N/A	N/A	N/A
	WHEEL AREA:						
00375	Full height front bolster (approx. 40° angle)	675	675	675	N/A	N/A	N/A
00376	Removable wheel covers (per axle)(tapered/squared)	950	950	950	950	950	950
06848	Steel over wheels w/ 10 ga. bolted in bottom of boom trough (does not include boom trough)	2,195			N/A	N/A	N/A
06846	Steel over wheels w/ 10 ga. bolted in bottom of boom trough (does not include boom trough)		2,865	2,865	N/A	N/A	N/A
06396	Steel over wheels w/ 10 ga. bolted in bottom of boom trough with 25° slope to load deck. Adds 1' to OAL.	2,980			N/A	N/A	N/A
06397	Steel over wheels w/ 10 ga. bolted in bottom of boom trough with 25° slope to load deck. Adds 1' to OAL.		3,640	3,640	N/A	N/A	N/A
00379	10 ga. floor plate bolted in bottom of boom	345					
00380	10 ga. floor plate bolted in bottom of boom		420	420	N/A	N/A	N/A
00381	60" rear load ramps (wood-filled)	1,640	1,640	1,640	N/A	N/A	N/A
06394	8' rear loading ramps				1,420	1,420	1,420
00382	Less bolsters between wheels	(675)					
00383	Less bolsters between wheels		(1,005)	(1,005)	N/A	N/A	N/A
00385	54" axle spacing (adds to OAL) - Hutch 7700 spring suspension	N/A	1,105	N/A	N/A	N/A	N/A
00386	54" axle spacing Air-ride susp.(adds to OAL)	915					
00387	54" axle spacing Air-ride susp.(adds to OAL)		965				
00388	54" axle spacing Air-ride susp.(adds to OAL)			995	N/A	N/A	N/A
00390	60" axle spacing (adds to OAL) - Hutch 7700 spring suspension	995					
00391	60" axle spacing (adds to OAL) - Hutch 7700 spring suspension		2,315	N/A	N/A	N/A	N/A
00392	60" axle spacing Air-ride susp. (adds to OAL)	1,180					
00393	60" axle spacing Air-ride susp. (adds to OAL)		1,925				
00394	60" axle spacing Air-ride susp. (adds to OAL)			1,975	N/A	N/A	N/A
00396	Detachable Wheel Area	4,955	4,955	4,955	N/A	N/A	N/A
00398	30" beavertail (adds 13" to OAL)	965	965	965	N/A	N/A	N/A
00397	27" beavertail	N/A	N/A	N/A	STD	STD	STD



TRAIL KING MECHANICAL DETACHABLE GOOSENECK TRAILERS MDG SERIES

	MODEL	TK70MDG	TK80MDG	TK110MDG	TK88MDG 16 WHEEL	TK88MDG EXPANDO	TK120MDG EXPANDO
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE
	SUSPENSIONS:						
00400	Multi leaf spring suspension	(4,025)	CONSULT FACTORY		N/A	N/A	N/A
00401	Air-ride suspension	STD	STD	STD	N/A	N/A	N/A
01018	Single point suspension	(2,375)	N/A	N/A	N/A	N/A	N/A
00403	TR8600 suspension (or equivalent) (Not permissible for overweight loads. Air ride recommended.)	N/A	(2,450)	(2,450)	N/A	N/A	N/A
00404	TR8750 suspension (or equivalent) (Not permissible for overweight loads. Air ride recommended.)	N/A	(1,490)	(1,490)	N/A	N/A	N/A
00075	Air-ride raising and lowering valve * TR series suspensions are not permissible for overweight (air ride is recommended).	550	550	550	N/A	N/A	N/A
	AXLES & BRAKES:						
	Flip axle with air-ride suspension, standard tires, axles and all connections (must add needed frame reinforcement).						
00405	8' wide flip axle	12,490	12,490	12,490	N/A	N/A	N/A
00407	8' 6" wide flip axle	12,720	12,720	12,720	N/A	N/A	N/A
00409	9' wide flip axle	13,120	13,120	13,120	N/A	N/A	N/A
00411	10' wide flip axle	13,675	13,675	13,675	N/A	N/A	N/A
00413	Deduct to make flip axle fixed	(1,230)	(1,230)	(1,230)	N/A	N/A	N/A
00414	Rear load-bearing tail channel for flip axles	700	700	700	N/A	N/A	N/A
00415	Non-loadbearing cover for flip (outsides only-steel)	590	590	590	N/A	N/A	N/A
00416	Loadbearing cover for flip (steel or wood)	760	760	760	N/A	N/A	N/A
00417	Tension bolts for loadbearing flip axle (required for point loading flip)	425	425	425	N/A	N/A	N/A
00418	3rd flip axle in lieu of 3rd fixed axle (third must be on air)	N/A	2,115	2,115	N/A	N/A	N/A
00419	Deduct 3rd axle (Trailer must have air-ride)	N/A	(8,875)	(8,875)	N/A	N/A	N/A
00076	Spring brakes (STD w/ ABS)	N/C	N/C				
00077	Spring brakes (per axle - minimum: 2 axles)			195	N/A	N/A	N/A
00420	Dust Shields (per axle)	105					
00422	Air lift rear axle (w/ dual ride height - deletes spring brakes)	N/A	1,690	1,690	N/A	N/A	N/A
	FRAME REINFORCEMENT:						
00423	Frame reinforcing for flip axle 0000	1,685	1,685	1,685	N/A	N/A	N/A
00425	Frame reinforcing for single axle booster 000-0	N/A	2,125	2,125	N/A	N/A	N/A
00429	Brackets, electrical, and air connections for future flip. (Must order proper frame reinforcement. Frame reinforcement does not include brackets, electrical, or air connections.)	755	755	755	N/A	N/A	N/A
	Maximum # of axles in any configuration	3	4	4	N/A	N/A	N/A



TRAIL KING MECHANICAL DETACHABLE GOOSENECK TRAILERS MDG SERIES

	MODEL	TK70MDG	TK80MDG	TK110MDG	TK88MDG 16 WHEEL	TK88MDG EXPANDO	TK120MDG EXPANDO
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE

TIRES & WHEELS:							
00080	Spring brakes (per axle - minimum: 2 axles)	NC	NC	NC	N/A	N/A	N/A
01038	6.75 x 17.5 disc wheels 8 hole pilot mount				0	0	0
00084	8.25 x 22.5 disc wheels	0	0	0	*NC	NC	NC
00090	255/70R 22.5 - 16PR radial tires	0	0	0			
00432	11R 22.5-14PR radial tires (per tire)	67	67	67	N/A	N/A	N/A
00434	11R 22.5-16PR radial tires (H) (per tire)	90	90	90	N/A	N/A	N/A
01048	215/75R 17.5-14PR radial tires				0	0	0
02099	255/70R22.5 16PR (per tire) (16-wheel units must be 10' wide to accommodate 255/70R22.5 tires and 8.25 x 22.5 disc wheels.)	0	0	0			
00437	275/70R 22.5 - 16PR radial tires (per tire)	73	73	73	N/A	N/A	N/A
ELECTRICAL:							
00091	4-pole female electrical socket wired to clearance light	65	65	65	65	65	65
06711	L.E.D. Lights (in lieu of standard)	560	560	560	560	560	560
00700	Additional side clearance lights (per pair) (5 pair maximum)	95	95	95	95	95	95
00093	Mid-turn signal (per pair)	120	120	120	120	120	120
00703	4 way electrical socket to the rear (ea.)	155	155	155	155	155	155
00440	Remote flasher w/ battery back-up	310	310	310	310	310	310
MISCELLANEOUS:							
05013	Flag holders (per pr.)	70	70	70	70	70	70
06326	Stainless steel insert in tail channel	200	200	200	200	200	200
	PAINT: See Trail King Color Chart						

*16 wheel units must be 10' wide to accommodate 255/70R22.5 tires and 8.25x 22.5 disc wheels.




TRAIL KING TK40RB ROLLBACK INDUSTRIAL TRAILER RB SERIES

STANDARD EQUIPMENT

2 - 20,000 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 Disc wheels 8-hole pilot mount, dual rims
 215/75R x 17.5 16PR radial tires
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 12" centers w/3" x 5" tubing on 16" centers
 PTO hydraulics
 Bed rolls back as trailer tilts to achieve a 7° load angle
 17" hydraulic fold down approach plate
 Tandem axle w/multi-leaf suspension

Automatic slack adjusters
 96" deck width
 28' deck length
 35" loaded deck height
 7' tongue
 12,000 lb. H.D. drop-leg jack w/tool box
 Pintle hitch w/18 3/4" - 29 3/4" adjustment
 Covered tool box
 8 D-rings
 Electrical system per DOT regulations
 Safety chains (less hooks)
 Headboard
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

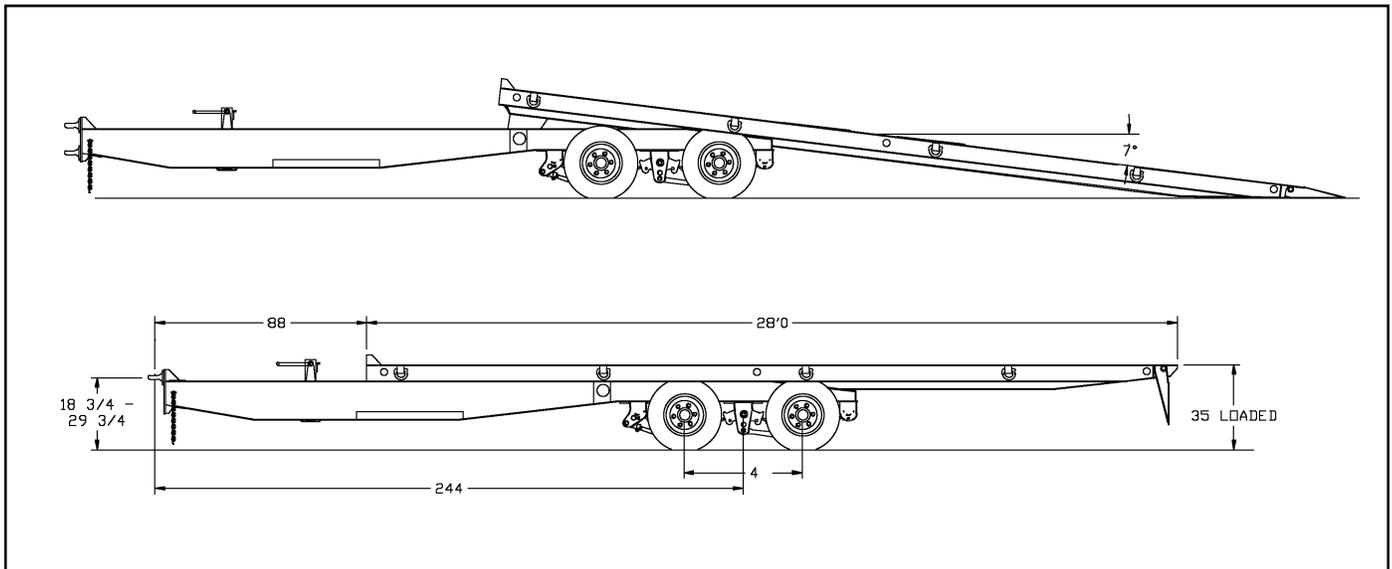

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
TK40RB-2800 40,000 LB. CAPACITY	28'	02254	\$35,435	02255	\$35,785

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK50RB ROLLBACK INDUSTRIAL TRAILER RB SERIES

STANDARD EQUIPMENT

- | | |
|---|---|
| <ul style="list-style-type: none"> 3 - 20,000 lb. axles 12¹/₄" x 7¹/₂" air brakes *Anti-lock brake system Disc wheels 8-hole pilot mount, dual rims 215/75R x 17.5 16PR radial tires Oil seals 1¹/₂" oak decking (raised) (NET) 6" I-beam crossmembers on 10" centers w/3" x 5" tubing on 10" centers PTO hydraulics Bed rolls back as trailer tilts to achieve a 7° load angle 17" hydraulic fold down approach plate Triple axle w/multi-leaf suspension Automatic slack adjusters | <ul style="list-style-type: none"> 96" deck width 30' deck length 36" loaded deck height 7' tongue 12,000 lb. H.D. drop-leg jack w/tool box Pintle hitch w/12³/₄" - 26¹/₄" adjustment Covered tool box 8 D-rings Electrical system per DOT regulations Safety chains (less hooks) Headboard Red & white conspicuity markings Color: Trail King 2-part polyurethane |
|---|---|

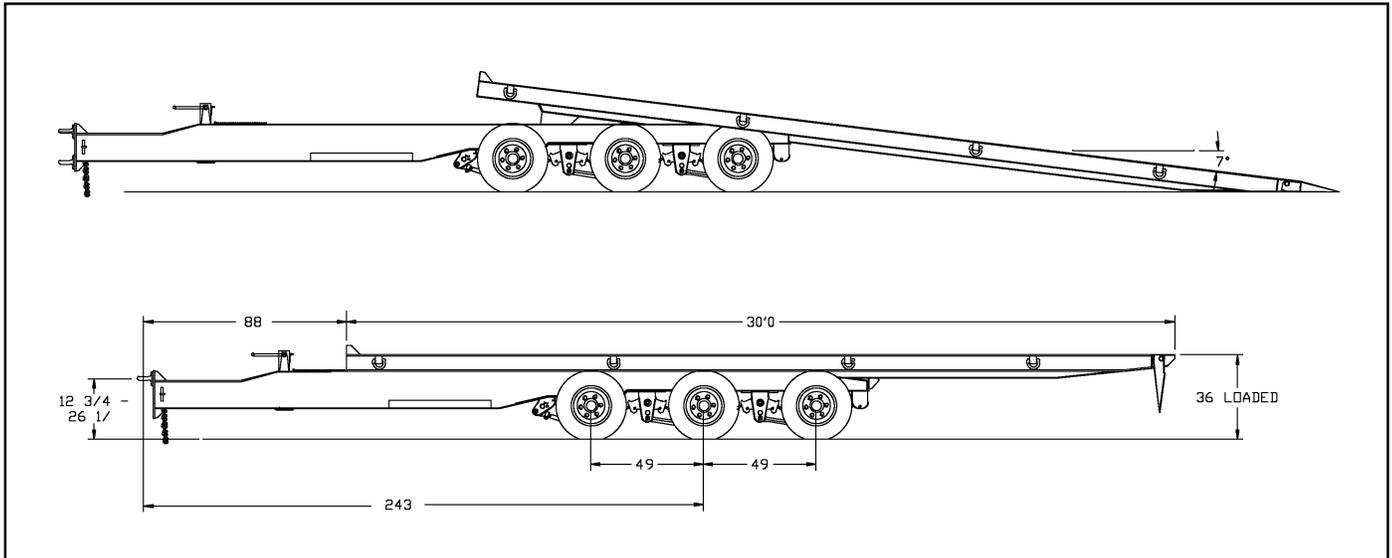

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------	---------------	--------	---------------

TK50RB-3000 50,000 LB. CAPACITY	30'	02200	\$45,875	02201	\$46,200
------------------------------------	-----	-------	----------	-------	----------

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING ROLLBACK INDUSTRIAL TRAILERS OPTIONS

	MODEL	TK40RB	TK50RB
ITEM#	ITEM	PRICE	PRICE
	HITCH:		
02202	7' tongue	0	0
02112	Lockable tool box	0	0
02046	Enclosed tongue (expanded metal)	130	130
02203	12,000 lb. H.D. drop-leg jack with tool box	0	0
	DECK:		
02207	8'6" deck width	470	
02229	8'6" deck width		540
02073	1 3/8" apitong deck (net)	950	
02230	1 3/8" apitong deck (net)		1030
02209	Star traction (2' each side) of approach plate	220	220
02210	Self-cleaning rear deck	1030	1030
02135	Traction aids on rear deck	515	515
02212	PTO hydraulic tilt (3,000 P.S.I. req.)	0	0
02213	Electric/hydraulic tilt-operated off power cord from tow vehicle (TKT50 only: Includes upgrade to 5" x 16" cylinders.)	2795	2795
02214	8 1/2 HP Kohler self-contained unit	3250	3250
00333	13 HP Honda self-contained power unit	3265	3265
00045	D-rings (Ea.)	50	50
07186	Pan-style recessed d-rings ILO d-rings	180	180
07187	Pan-style d-rings	65	65
02236	Stake pockets (ea.)	60	60
02215	3" high deck rail	515	
02232	3" high deck rail		540
02091	Spare tire carrier on tongue	140	140
02217	*8,000 electric winch w/ recessed winch roller, mounted above tongue	2720	2720
06012	*8,000 lb. hydraulic winch w/ recessed winch roller, mounted above tongue	2925	2925
02218	*12,000 hydraulic winch w/ recessed winch roller, mounted above tongue	3615	3615
00250	Winch remote control socket at rear with 50' cable (dual side controls N/A)	1485	1485
06438	Wireless remote (dual side controls N/A)	1295	1295
06710	LED light package (Grote)	425	425
	TIRES & WHEELS:		
06284	235/75R17.5 (per tire)	57	57
00081	6.75 x 17.5 disc wheels 8-hole pilot mount	0	0
	PAINT: See Trail King Color Chart		

*Winches would be mounted above tongue area.




TRAIL KING RIGID GOOSENECK TRAILERS RG SERIES

STANDARD EQUIPMENT

2 - 22,500 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 Disc wheels, 8-hole pilot mount, dual rims
 235/75R17.5 radial tires
 Oil seals
 3-leaf spring suspension
 10' 5" gooseneck with 84" swing clearance
 16" kingpin setting
 Bostlers between axles
 Pin-type park stands
 1 1/2" oak decking (raised) (NET)
 Knee braces on 48" centers
 I-beam crossmembers on 24" centers
 Center frame construction

100,000/80,000 PSI yield strength steel construction
 Automatic slack adjusters
 102" overall deck width
 35" loaded deck height
 49" loaded 5th wheel height
 D-rings on 48" centers
 10" mill channel side rail
 30" beavertail, steel, with traction aids
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

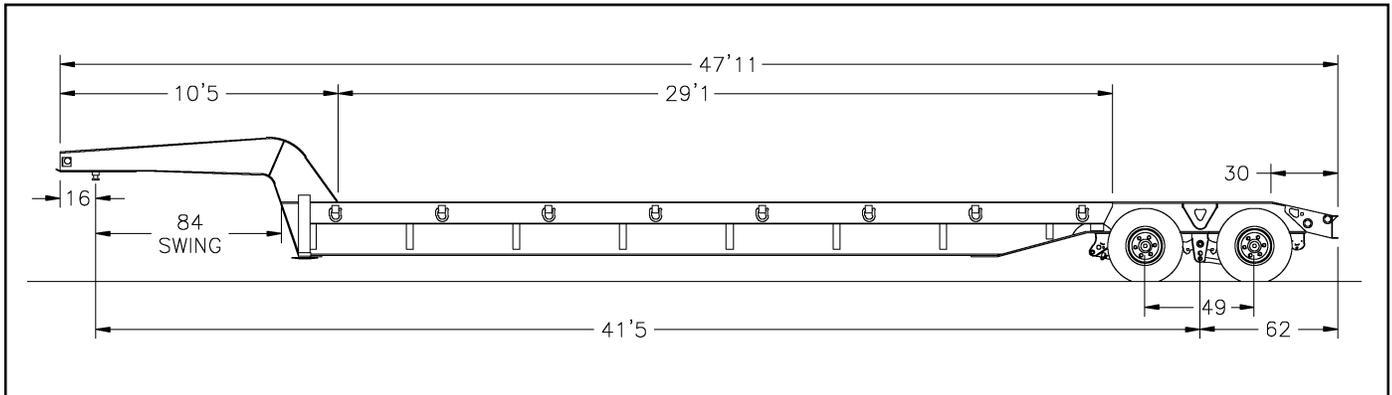

MODEL	LENGTH	DECK LENGTH	ITEM #	W/ABS 2S1M	ITEM #	W/ABS 4S2M
50,000 LBS. CONCENTRATED IN 16'						
TK50RG	42'	23' 1"	00000	\$32,890	00001	\$33,250
TK50RG	44'	25' 1"	00002	\$33,575	00003	\$33,935
TK50RG	46'	27' 1"	00004	\$34,260	00005	\$34,630
TK50RG	48'	29' 1"	00006	\$34,940	00007	\$35,305
70,000 LBS. CONCENTRATED IN 16'						
TK70RG	42'	23' 1"	00008	\$34,425	00010	\$34,795
TK70RG	44'	25' 1"	00011	\$35,165	00012	\$35,525
TK70RG	46'	27' 1"	00013	\$35,925	00014	\$37,690
TK70RG	48'	29' 1"	00015	\$36,640	00016	\$37,000

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING RIGID GOOSENECK TRAILERS RG SERIES

STANDARD EQUIPMENT

3 - 22,500 lb. axles
 Air brakes
 *Anti-lock brake system (TK80RG)
 Disc wheels, 8-hole pilot mount, dual rims
 235/75R17.5 radial tires (TK80RG)
 225/70R 22.5 16PR radial tires (TK110RG) (H)
 Oil seals
 3-leaf spring suspension
 10' 5" gooseneck with 84" swing clearance
 16" kingpin setting
 Bostlers between axles
 Pin-type park stands
 1½" oak decking (raised) (NET)
 Knee braces on 48" centers
 I-beam crossmembers on 24" centers
 100,000/80,000 PSI yield strength steel construction

Center frame construction
 Automatic slack adjusters
 102" overall deck width
 35" loaded deck height (TK80RG)
 36" loaded deck height (TK110RG)
 49" loaded 5th wheel height
 D-rings on 48" centers
 10" mill channel side rail
 30" beavertail, steel, with traction aids
 Mid-turn signal/clearance light
 Rubber mounted sealed lights and sealed harness system
 Electrical system per DOT regulations
 7-pole electrical socket
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

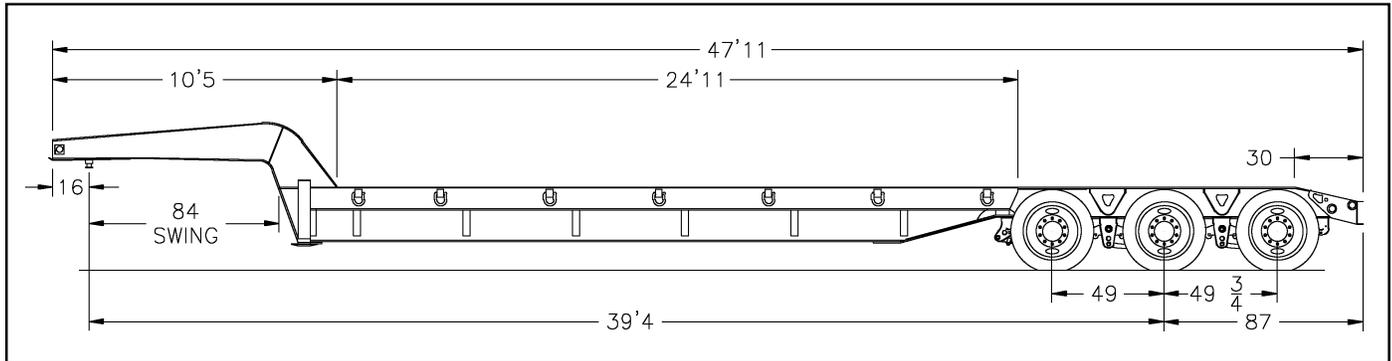

MODEL	LENGTH	DECK LENGTH	ITEM #	NO ABS	ITEM #	W/ABS 2S1M	ITEM#	W/ABS 4S2M
-------	--------	-------------	--------	--------	--------	------------	-------	------------

80,000 LBS. CONCENTRATED IN 16'

TK80RG	42'	18' 11"			00017	\$43,455	00018	\$43,820
TK80RG	44'	20' 11"			00019	\$44,225	00020	\$44,580
TK80RG	46'	22' 11"			00021	\$44,965	00022	\$45,310
TK80RG	48'	24' 11"			00023	\$44,575	00024	\$45,680

** 110,000 LB. UNIFORM CAPACITY

100,000 LBS. CONCENTRATED IN 16'

			ITEM #	NO ABS	ITEM #	2S1M	ITEM#	4S2M
TK110RG	42'	18' 11"	05156	\$44,685	00025	\$45,525	00026	\$45,900
TK110RG	44'	20' 11"	05157	\$45,565	00027	\$46,395	00028	\$46,765
TK110RG	46'	22' 11"	05158	\$46,420	00029	\$47,245	00030	\$47,605
TK110RG	48'	24' 11"	05160	\$47,295	00031	\$48,095	00032	\$48,465

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING RIGID GOOSENECK TRAILERS RG SERIES

	MODEL	TK50RG	TK70RG	TK80RG	TK110RG
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE
	UPPER DECK:				
00033	Deduct pin-type park stands	(395)	(395)	(395)	(395)
00034	Full width upper deck (specify 15°, 30°, or 45° slope) (Upper deck length will vary)	1,665	1,665	1,665	1,665
00035	2-speed landing gear	865	865	865	865
00036	Tool box in upper deck above king pin (includes cover)	425	425	425	425
	MAIN DECK:				
00037	8' deck width	(500)	(500)		
00038	8' deck width			(660)	(660)
00039	8'6" deck width	0	0	0	STD
00040	9' deck width	685	685		
00041	9' deck width			1,310	1,310
00042	10' deck width	1,565	1,565		
00043	10' deck width			2,550	2,550
00044	1 3/8" Apitong raised decking	965	965	965	965
06461	1 3/4" Apitong raised decking	1,170	1,170	1,170	1,170
00045	D-rings (Ea.)	50	50	50	50
00046	Recessed d-rings (ea)	65	65	65	65
00047	Full width rear deck single drop (raises deck height 2")	950	950		
00048	Full width rear deck single drop (raises deck height 2")			1,360	1,360
00049	Full width rear deck double drop (inc. front bolster)	2,075	2,075		
00050	Full width rear deck double drop (inc. front bolster)			2,865	2,865
00051	48" beavertail (does not add to OAL)	200	200	200	200
00052	60" beavertail (does not add to OAL)	380	380	380	380
00053	Wood filled beavertail	310	310	310	310
00054	60" wood filled rear ramps (24" wide) (wood filled or ladder)	2,535	2,535	2,535	2,535
00068	Spring assist (must have 60" ramps)	1,290	1,290	1,290	1,290
00055	9' electric/ hydraulic ramps (33" wide)	4,540	4,540	4,540	4,540
06320	12' Bi-fold ramps (PTO operated, 42" wide) (wood-filled)	8,930	8,930	8,930	8,930
06358	per additional ft. for ramps (15' max.)	230	230	230	230
00056	52" paver extensions	975	975	975	975
00057	Double drop deck (24" deck ht., 8" ground clear.)	1,830	1,830	1,830	1,830
00058	Swing-out outriggers (Ea.)	105	105	105	105
00059	Heavy duty swing-out outriggers (Ea.)	155	155	155	155
00060	Swing-out outriggers for 19' deck	1,925	1,925	1,925	1,925
00061	Swing-out outriggers for 21' deck	2,070	2,070	2,070	2,070
00062	Swing-out outriggers for 23' deck	2,230	2,230	2,230	2,230
00063	Swing-out outriggers for 25' deck	2,385	2,385	2,385	2,385
00064	Swing-out outriggers for 27' deck	2,535	2,535	2,535	2,535
00065	Swing-out outriggers for 29' deck	2,685	2,685	2,685	2,685
00066	Flat-back outriggers on bolster and beavertail	825	825		
00067	Flat-back outriggers on bolster and beavertail			1,095	1,095



TRAIL KING RIGID GOOSENECK TRAILERS RG SERIES

	MODEL	TK50RG	TK70RG	TK80RG	TK110RG
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE
	SUSPENSION:				
00072	Air-ride suspension (raises deck height 1 1/2")	4,135	4,135		
00073	Air-ride suspension (raises deck height 1 1/2")			6,195	6,195
00069	Single point spring suspension	1,860	1,860	N/A	N/A
00070	TR8600 suspension (or equivalent)* (Not recommended for overweight loads. Air-ride is recommended.)	N/A	N/A	3,640	3,640
00071	TR8750 suspension (or equivalent)* (Not recommended for overweight loads. Air-ride is recommended.)	N/A	N/A	4,610	4,610
00074	Manual dump valve (rear axle)	385	385	385	385
05007	Lowering kit (both axles)	385	385	385	385
00075	Air-ride raising and lowering valve	550	550	550	550
	AXLES & BRAKES:				
00077	Spring brakes (per axle - minimum: 2 axles)			195	
00420	Dust Shields (per axle)	105	105	105	105
	TIRES & WHEELS:				
00081	6.75 x 17.5 disc wheels 8-hole pilot mount	0	0	0	N/C
00084	8.25 x 22.5 disc wheels	N/C	N/C	N/C	N/C
07758	235/75R 17.5 16PR	0	0	0	
00087	235/75R 17.5 tires (ea.)				31
00248	255/70R 22.5 (per tire)	(31)	(31)	(31)	
00090	255/70R 22.5 - 16PR radial tires				0
	ELECTRICAL:				
00091	4-pole female electrical socket wired to clearance light	65	65	65	65
00092	Side Clearance Lights / Pair	95	95	95	95
00093	Mid-turn signal (per pair)	120	120	120	120
00094	3rd Tail Light Package	120	120	120	120
06711	L.E.D. Lights (in lieu of standard)	560	560	560	560
	PAINT: See Trail King Color Chart				

*TR Series suspensions are not permissible for overweight loads. (Air-ride is recommended.)



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK12 INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

2 - 6,000 lb. axles
 12" x 2" electric brakes
 Single disc wheel (8-hole)
 235/85R 16 radials
 1½" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 6 recessed D-rings
 96" deck width
 18' deck length (14' flatbed - 4' beavertail)

34¼" loaded deck height
 5' self-supporting loading ramps (19" wide)
 5,000-lb. jack w/ tool box
 Pintle hitch w/19¼" - 30½" adjustment
 Breakaway switch (less battery)
 Headboard
 Registration holder
 Electrical system per DOT regulations
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

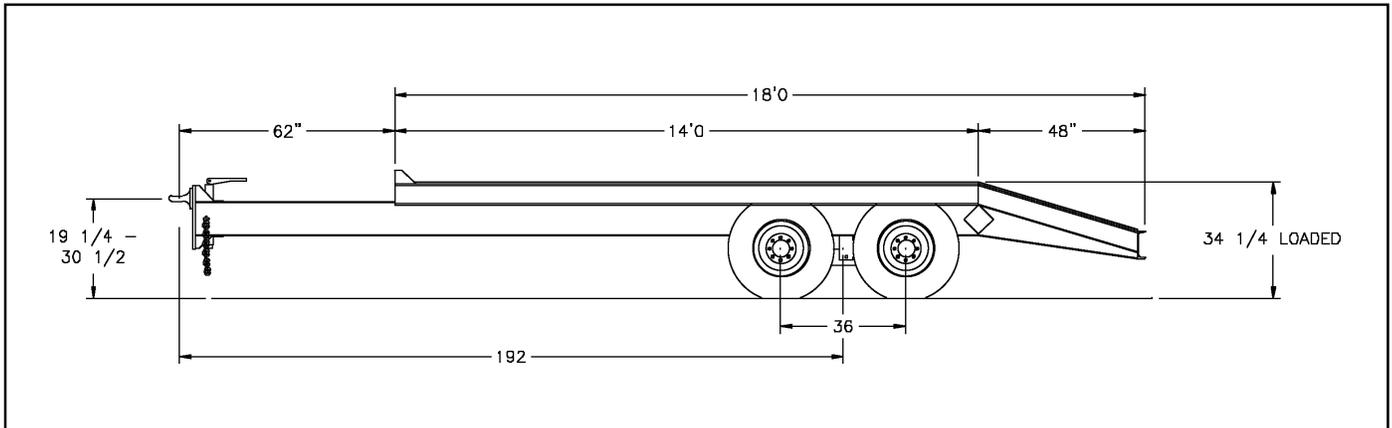

MODEL	LENGTH	ITEM#	RETAIL
TK12 12,000 LB. CAPACITY	18'	02000	\$8,110

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK12+6 INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

3 - 6,000 lb. axles
 12" x 2" electric brakes
 Single disc wheel (8-hole)
 235/85R 16 radials
 1½" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 6 recessed D-rings
 96" deck width
 20' deck length (16' flatbed - 4' beavertail)
 22' deck length (18' flatbed - 4' beavertail)

34¼" loaded deck height
 5' self-supporting loading ramps (19" wide)
 5,000-lb. jack w/ tool box
 Pintle hitch w/19¼" - 30½" adjustment
 Breakaway switch (less battery)
 Safety chains (less hooks)
 Headboard
 Registration holder
 Electrical system per DOT regulations
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

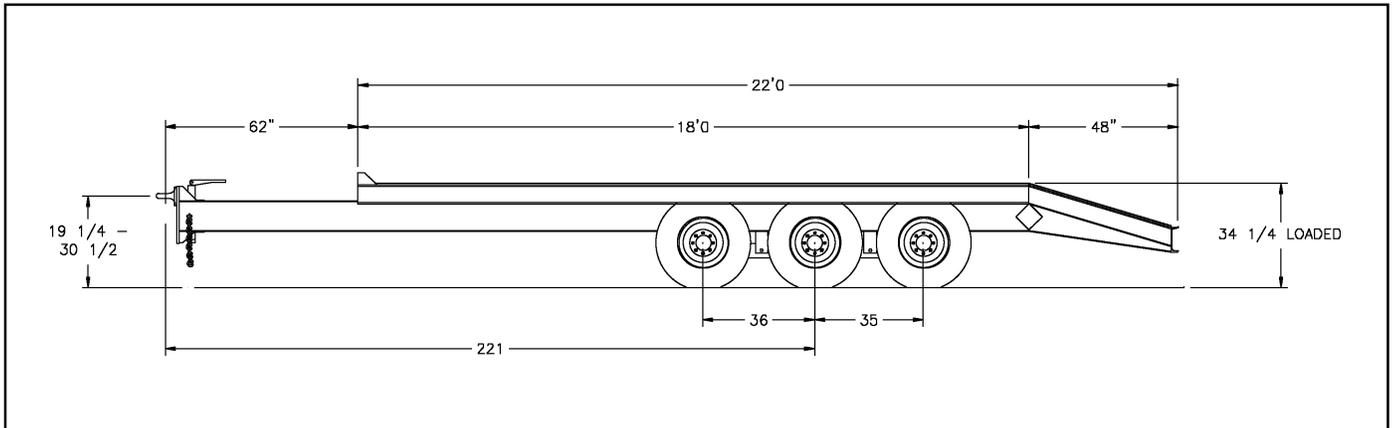

MODEL	LENGTH	ITEM#	RETAIL
TK12+6			
18,000 LB. CAPACITY	20'	02001	\$9,440
18,000 LB. CAPACITY	22'	02002	\$9,780

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK18LP INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

- 2 - 9,000 lb. axles
- 12 1/4" x 3 3/8" electric brakes
- Tandem dual disc wheels (8-hole)
- 235/85R 16 radials
- Oil seals
- 1 1/2" oak decking (raised) (NET)
- 4" I-beam crossmembers on 16" centers
- 6 D-rings
- 96" deck width
- 24' deck length (19' flatbed - 5' beavertail)
- 26' deck length (21' flatbed - 5' beavertail)
- 33 1/4" loaded deck height
- 5' self-supporting loading ramps (19" wide)
- 12,000-lb. H.D. drop-leg jack w/ tool box
- Pintle hitch w/18" - 29 1/4" adjustment
- Breakaway switch (less battery)
- Safety chains (less hooks)
- Headboard
- Registration holder
- Electrical system per DOT regulations
- Red & white conspicuity markings
- Color: Trail King 2-part polyurethane

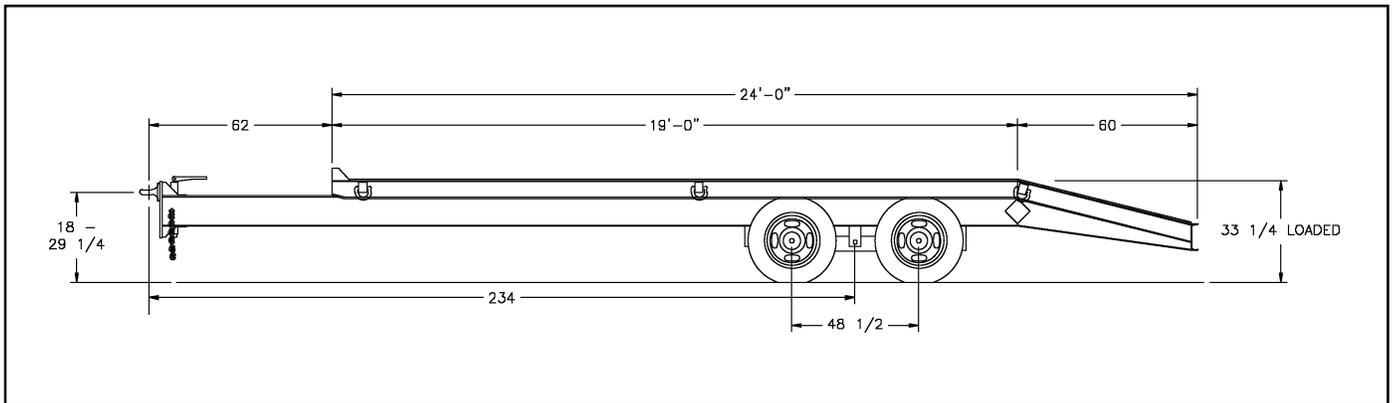

MODEL	LENGTH	ITEM#	RETAIL
TK18LP			
18,000 LB. CAPACITY	22'	02003	\$11,415
18,000 LB. CAPACITY	24'	02004	\$11,870
18,000 LB. CAPACITY	26'	06699	\$12,270

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK20LP INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

2 - 10,000 lb. axles
 12 1/4" x 3 3/8" electric brakes - general duty
 12 1/4" x 4" electric brakes - heavy duty
 Tandem dual disc wheels (8-hole)
 235/85R 16 radials
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 6 D-rings
 24' deck length (19' flatbed - 5' beavertail)
 26' deck length (21' flatbed - 5' beavertail)

96" deck width
 33 1/4" loaded deck height
 5' self-supporting loading ramps (19" wide)
 12,000-lb. H.D. drop-leg jack w/ tool box
 Pintle hitch w/18" - 29 1/4" adjustment
 Breakaway switch (less battery)
 Safety chains (less hooks)
 Headboard
 Registration holder
 Electrical system per DOT regulations
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

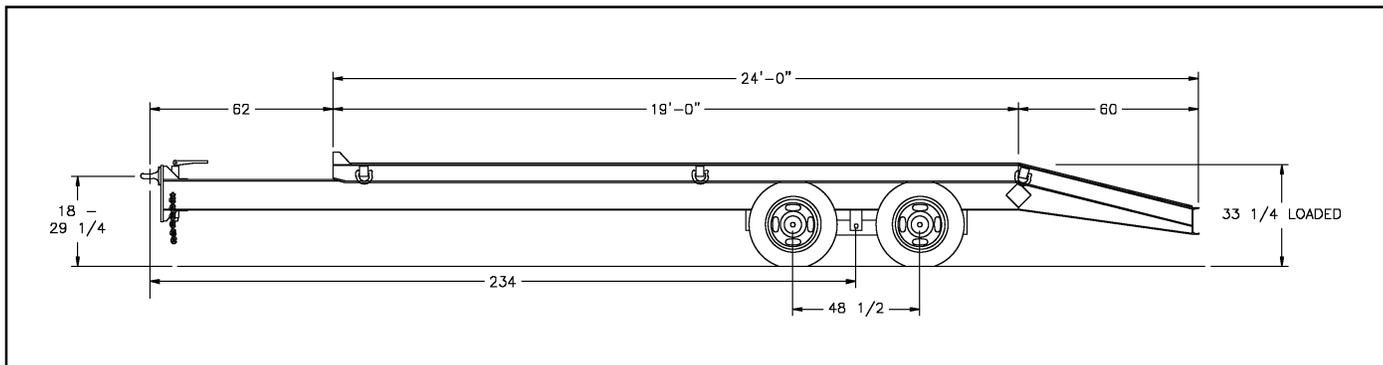

MODEL	LENGTH	ITEM#	RETAIL	
			GENERAL DUTY DEXTER 10K AXLE	HEAVY DUTY DEXTER 10K AXLE
TK20LP				
20,000 LB. CAPACITY	22'	02006	\$11,945	02007 \$12,600
20,000 LB. CAPACITY	24'	02008	\$12,360	02009 \$13,040
20,000 LB. CAPACITY	26'	06700	\$13,010	06701 \$13,690

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK24LP INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

- 2 - 12,000 lb. axles
- 12 1/4" x 5" electric brakes
- Tandem dual disc wheels (8-hole)
- 235/85R 16 radials
- Oil seals
- 1 1/2" oak decking (raised) (NET)
- 4" I-beam crossmembers on 16" centers
- 6 D-rings
- 96" deck width
- 24' deck length (19' flatbed - 5' beavertail)
- 26' deck length (21' flatbed - 5' beavertail)
- 33 1/4" loaded deck height
- 5' self-supporting loading ramps (19" wide)
- 12,000-lb. H.D. drop-leg jack w/ tool box
- Pintle hitch w/18" - 29 1/4" adjustment
- Breakaway switch (less battery)
- Safety chains (less hooks)
- Headboard
- Registration holder
- Electrical system per DOT regulations
- Red & white conspicuity markings
- Color: Trail King 2-part polyurethane

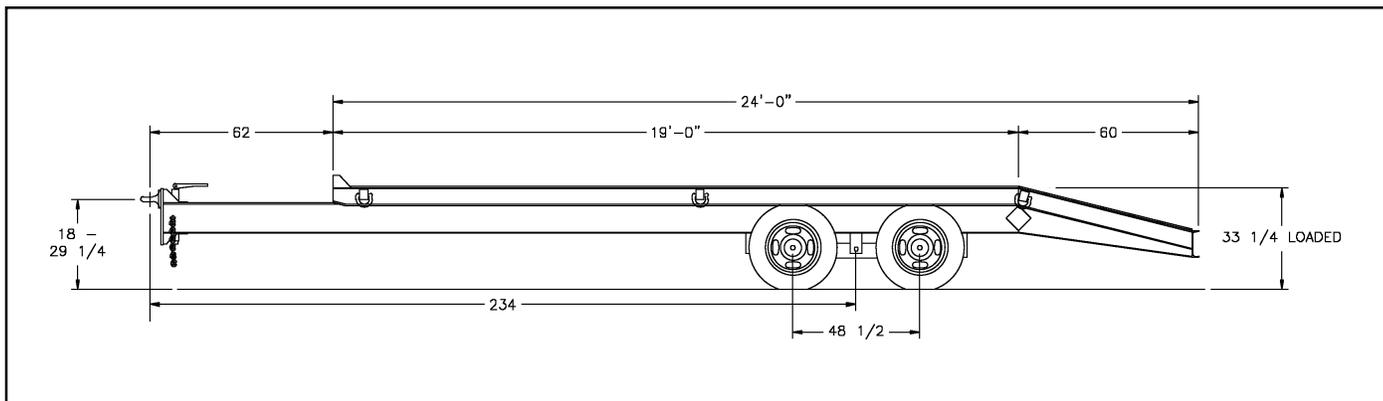

MODEL	LENGTH	ITEM#	RETAIL
TK24LP			
24,000 LB. CAPACITY	22'	02012	\$13,190
24,000 LB. CAPACITY	24'	02013	\$13,605
24,000 LB. CAPACITY	26'	06790	\$14,300

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING INDUSTRIAL TAG TRAILERS OPTIONS

	MODEL	TK12	TK12+6	TK18LP	TK20LP	TK24LP
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE
	HITCH:					
02237	2 5/16" ball hitch	0	0	0		
02036	Tube arch gooseneck w/ 2 5/16" ball coupler	1,935	1,935	1,935		
02037	Tube arch gooseneck w/ 2 5/16" ball coupler				2,070	N/A
02038	Tube arch gooseneck w/ mini-5th wheel (2" KP)	1,965	1,965			
02039	Tube arch gooseneck w/ mini 5th wheel			2,130	2,130	2,130
02040	2 5/16" ball plate (for truck)	480	480	480	480	
02041	2" kingpin plate (for truck)	480	480	480	480	480
02043	12,000 lb. H.D.. drop-leg jack w/tool box	350	350			
02033	12,000 lb. H.D.. drop-leg jack w/tool box			0	0	0
02045	Lockable tool box	0	0	0	0	0
02046	Enclosed tongue (expanded metal)	130	130	130	130	130
00103	Platform for tubearch gooseneck	1,160	1,160	1,160	1,160	1,160
	DECK:					
02059	8'6" deck width	250				
02060	8'6" deck width		280			
02061	8'6" deck width			365		
02062	8'6" deck width				375	375
02063	1 3/8" Apitong decking (net)	750				
02064	1 3/8" Apitong decking (net)		875	875	875	875
02068	Less beavertail & ramps (does not deduct from OAL)	(540)	(540)			
02067	Less beavertail & ramps (does not deduct from OAL)			(595)	(595)	(595)
02069	Bucket slot in beavertail	780	780	780	780	780
02238	Self-cleaning beavertail - full width	N/C	N/C	N/C	N/C	N/C
02070	Traction aids over wood on beavertail	310	310			
02071	Traction aids over wood on beavertail			545	545	545
00045	D-rings (Ea.)	50	50	50	50	50
02189	Recessed D-rings ILO D-rings	STD	STD			
02082	Recessed D-rings (Ea.)	65	65	65	65	65
02137	Recessed D-rings ILO D-rings			135	135	135
02236	Stake pockets (ea.)	60	60	60	60	60
02091	Spare tire carrier on tongue	140	140	140	140	140
	BRAKES:					
02191	Electric brakes	0	0	0	0	0
02121	2S1M ABS air-brakes (must include H.D. axle)	N/A	N/A	N/A	2,490	
02226	2S1M ABS air-brakes					2,995
05036	4S2M ABS air-brakes (must include H.D. axle)	N/A	N/A	N/A	2,865	
05037	4S2M ABS air-brakes					3,360
02090	Electronic brake control kit (for ABS equipped vehicles)	230	230	230	230	230
	TIRES & WHEELS:					
02184	235/85R16 Radial	0	0	0	0	0



TRAIL KING INDUSTRIAL TAG TRAILERS OPTIONS

	MODEL	TK12	TK12+6	TK18LP	TK20LP	TK24LP
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE
	RAMPS:					
02074	Heavy duty crawler ramps (wood filled)	255	255	255	255	255
02075	Center ramp (ladder)	415	415	415	415	415
02076	Center ramp (wood filled)	520	520	520	520	520
02077	Spring assist ramps	130	130	130	130	130
02079	Ramps slide together (Will have approximately 17" space)	315	315	315	315	315
	MISCELLANEOUS:					
06710	LED light package (Grote)	425	425	425	425	425
02239	Mud Flaps	105	105	105	105	105
06036	Grab hooks with safety chains	185	185	185	185	185
06067	Out-of-jig charge			455		
06068	Out-of-jig charge				525	
06069	Out-of-jig charge					595
02092	Factory installation of electric brake control	230	230	230	230	230
02096	Factory installation gooseneck plate on towing vehicles	345	345	345	345	
	PAINT: See Trail King Color Chart					




TRAIL KING TK32LP INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

2 - 20,000 lb. axles
 12¹/₄" x 7¹/₂" air brakes
 *Anti-lock brake system
 Disc wheels 8-hole pilot mount, dual rims
 215/75R 17.5 16PR radial tires
 Oil seals
 1¹/₂" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 6 D-rings
 24' deck length (19' flatbed - 5' beavertail)
 26' deck length (21' flatbed - 5' beavertail)

96" deck width
 Automatic slack adjusters
 35" loaded deck height
 5' self-supporting loading ramps (19" wide)
 12,000-lb. H.D. drop-leg jack w/ tool box
 Pintle hitch w/20" - 31¹/₄" adjustment
 Electrical system per DOT regulations
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

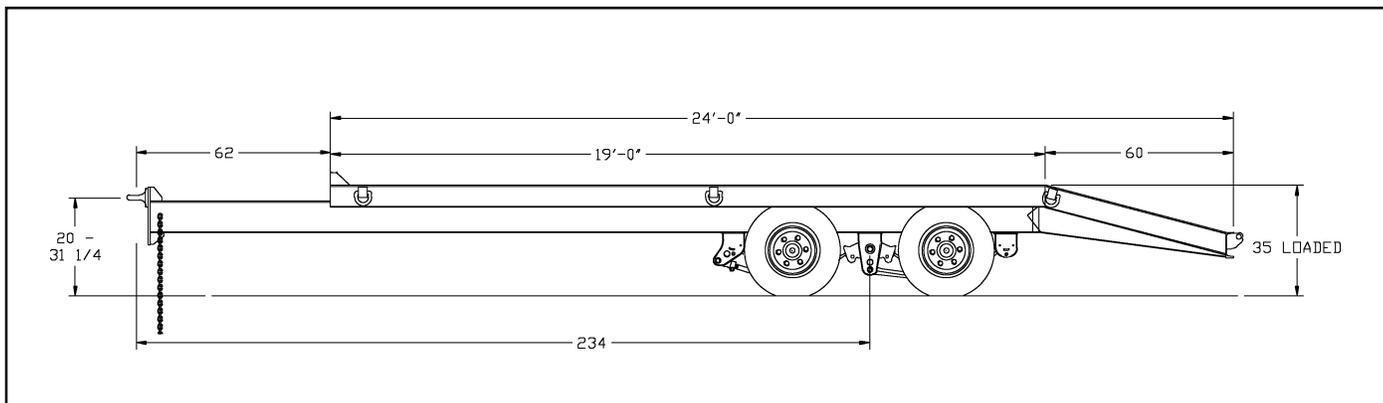

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
TK32LP					
32,000 LB. CAPACITY	22'	02015	\$17,560	02244	\$17,910
32,000 LB. CAPACITY	24'	02016	\$18,300	02245	\$18,655
32,000 LB. CAPACITY	26'	06702	\$19,000	06703	\$19,355

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK40 INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

2 - 20,000 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 Disc wheels 8-hole pilot mount, dual rims
 235/75R17.5 radial tires
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 6 D-rings
 24' deck length (19' flatbed - 5' beavertail)
 26' deck length (21' flatbed - 5' beavertail)

96" deck width
 Automatic slack adjusters
 36 1/2" loaded deck height
 5' self-supporting loading ramps (19" wide)
 12,000-lb. H.D. drop-leg jack w/ tool box
 Pintle hitch w/21 1/4" - 32 1/2" adjustment
 Electrical system per DOT regulations
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

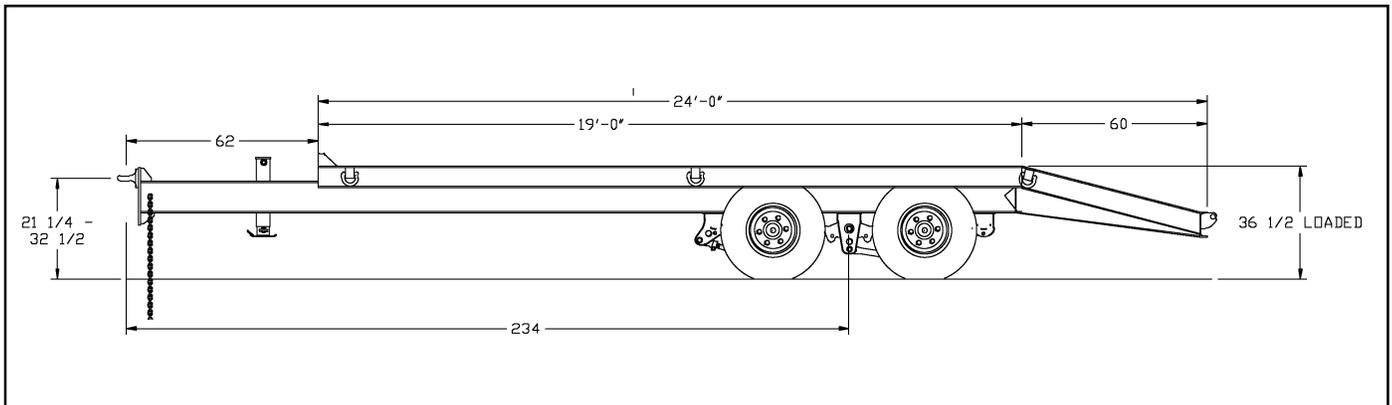

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
TK40					
40,000 LB. CAPACITY	22'	02018	\$17,645	02246	\$17,995
40,000 LB. CAPACITY	24'	02019	\$18,455	02247	\$18,820
40,000 LB. CAPACITY	26'	06704	\$19,195	06705	\$19,540

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK40LP INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

2 - 20,000 lb. axles
 12¹/₄" x 7¹/₂" air brakes
 *Anti-lock brake system
 Disc wheels 8-hole pilot mount, dual rims
 215/75R x 17.5 16 PR radial tires
 Oil seals
 1¹/₂" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 6 D-rings
 24' deck length (19' flatbed - 5' beavertail)
 26' deck length (21' flatbed - 5' beavertail)

96" deck width
 Automatic slack adjusters
 32" loaded deck height
 5' self-supporting loading ramps (19" wide)
 12,000-lb. H.D. drop-leg jack w/ tool box
 Pintle hitch w/16³/₄" - 32¹/₂" adjustment
 Electrical system per DOT regulations
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

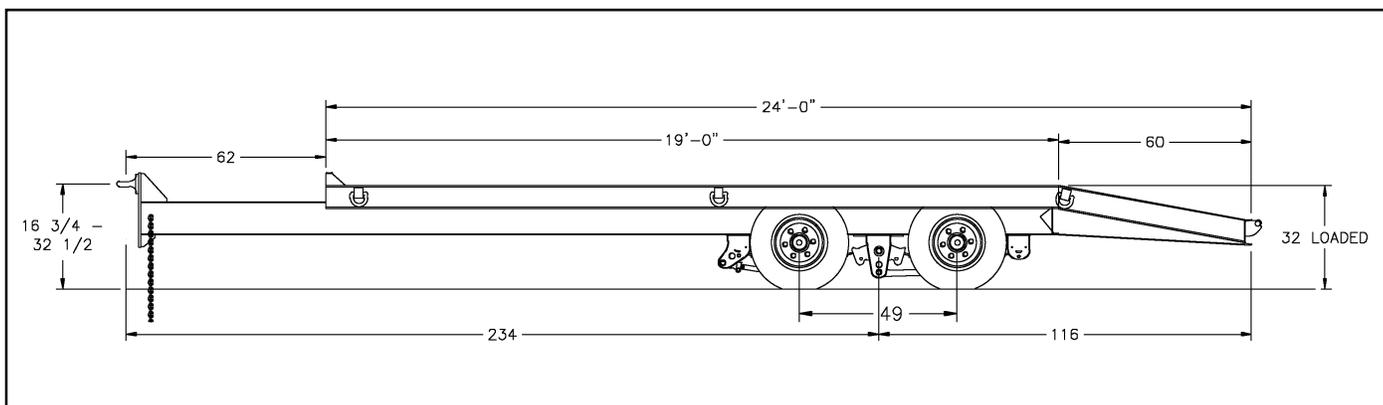

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
TK40LP					
40,000 LB. CAPACITY	22'	02021	\$17,645	02248	\$17,995
40,000 LB. CAPACITY	24'	02022	\$18,455	02249	\$18,820
40,000 LB. CAPACITY	26'	06706	\$19,195	06707	\$19,540

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK40LP "SPECIAL" TK SERIES

STANDARD EQUIPMENT

- | | |
|--|--|
| <ul style="list-style-type: none"> 2 - 20,000 lb. axles 12¹/₄" x 7¹/₂" air brakes Anti-lock brake system Disc wheels 8-hole pilot mount, dual rims 215/75R x 17.5 16 PR radial tires Oil seals 1¹/₂" oak decking (raised) (NET) 4" I-beam crossmembers on 16" centers 6 D-rings 27' deck length (21' flatbed - 6' beavertail) 6' wood-filled, spring-assist loading ramps | <ul style="list-style-type: none"> 102" deck width Automatic slack adjusters 32" loaded deck height 12,000-lb. H.D. drop-leg jack w/ tool box Pintle hitch w/16³/₄" - 32¹/₂" adjustment LED lights Electrical system per DOT regulations Safety chains (less hooks) Headboard Red & white conspicuity markings Color: Trail King maroon 2-part polyurethane |
|--|--|

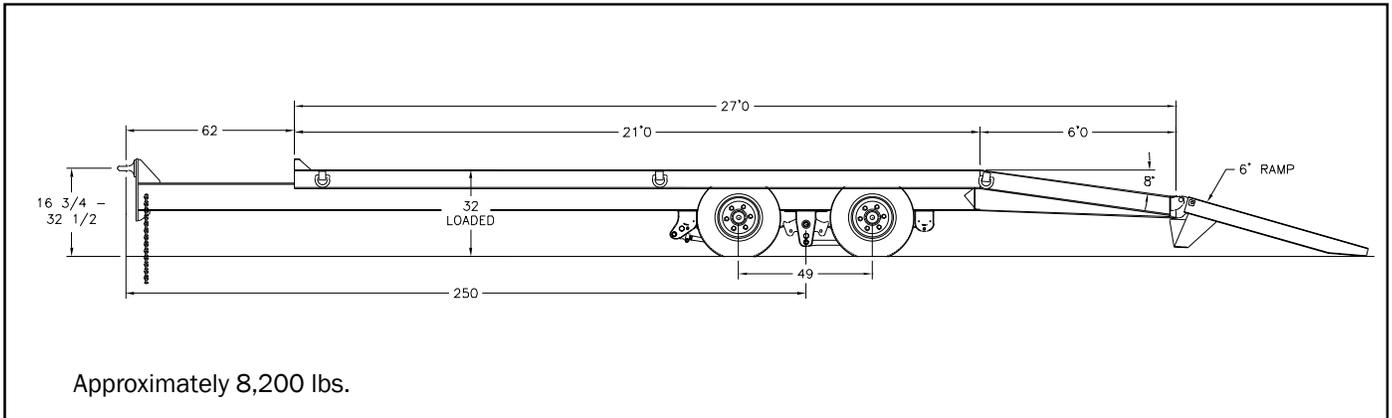

MODEL	LENGTH	ITEM#	W/ABS 2S1M
-------	--------	-------	---------------

TK40LP "Special" 40,000 LB. CAPACITY	27'	06686	\$20,530
---	-----	-------	----------




TRAIL KING TK42LP INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

3 - 20,000 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 Disc wheels 8-hole pilot mount, dual rims
 215/75R17.5 16 PR radial tires
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 8 D-rings
 28' deck length (23' flatbed - 5' beavertail)
 96" deck width

Automatic slack adjusters
 32" loaded deck height
 5' self-supporting loading ramps (19" wide)
 12,000-lb. H.D. drop-leg jack w/ tool box
 Pintle hitch w/16 3/4" - 32 1/2" adjustment
 Electrical system per DOT regulations
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

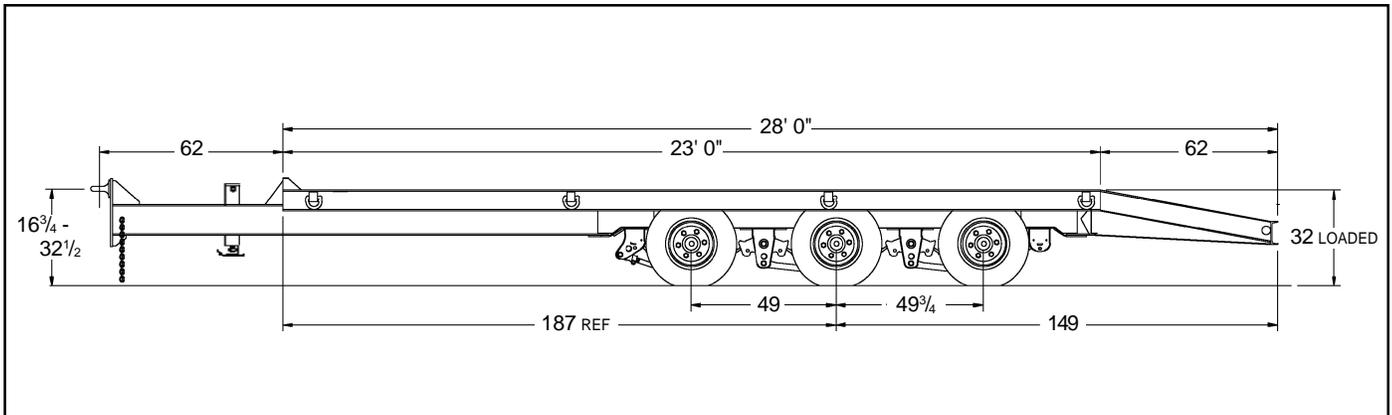

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------	---------------	--------	---------------

TK42LP

42,000 LB. CAPACITY	28'	06507	\$25,840	06508	\$26,575
42,000 LB. CAPACITY	30'	06509	\$26,645	06510	\$27,390

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK50LP INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

3 - 20,000 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 Disc wheels 8-hole pilot mount, dual rims
 215/75R17.5 16 PR radial tires
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 12" centers
 8 D-rings
 26' deck length (21' flatbed - 5' beavertail)
 102" deck width
 Traction aids on deck

Automatic slack adjusters
 32" loaded deck height
 5' self-supporting loading ramps (19" wide)
 12,000-lb. H.D. drop-leg jack w/ tool box
 Adjustable 4-bolt pintle hitch with 20,000 lb. vertical capacity and 100,000 lb. pull capacity
 Pintle hitch w/13 1/2" - 27" adjustment
 Electrical system per DOT regulations
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

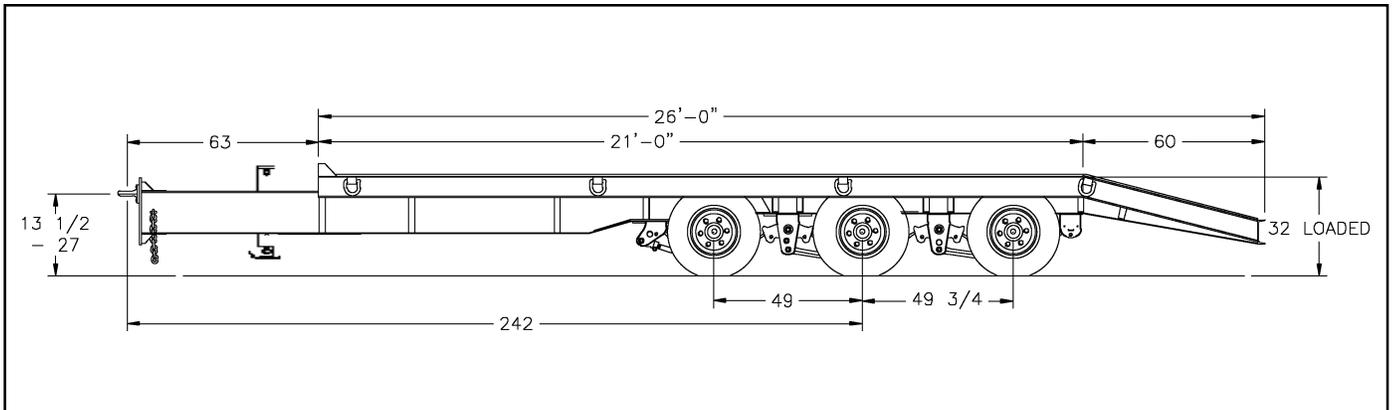

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
TK50LP					
50,000 LB. CAPACITY	26'	02034	\$28,555	02250	\$28,900
50,000 LB. CAPACITY	28'	06533	\$29,365	06534	\$29,715
50,000 LB. CAPACITY	30'	06708	\$30,180	06709	\$30,530

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK50LP "SPECIAL" INDUSTRIAL TRAILER TK SERIES

STANDARD EQUIPMENT

2- 20,000-lb. axles
 12 ¼" x 7 ½" air brakes
 * Anti-lock brake system
 215/75R 17.5 14 Ply tires
 Disc wheels 8-hole pilot mount, dual rims
 Oil seals
 1 ½" oak decking
 12 D-rings on main deck, 4 on upper deck
 30' deck length (25' flatdeck - 5' beavertail)
 4" I-beam crossmembers on 12" centers
 10'7" full width upper deck
 Loaded 5th wheel height - 50"

30-degree slope to upper deck
 ¼" floorplate on slope w/ traction aids
 Pin-type park stands
 33" loaded deck height
 Multi-leaf spring suspension
 60" wood-filled ramps
 Automatic slack adjusters
 Rubber-mounted sealed beam lights and sealed electrical system
 Electrical system per ICC/ DOT regulations
 Registration holder
 Red and white conspicuity stripe
 Color: Trail King 2-part polyurethane paint

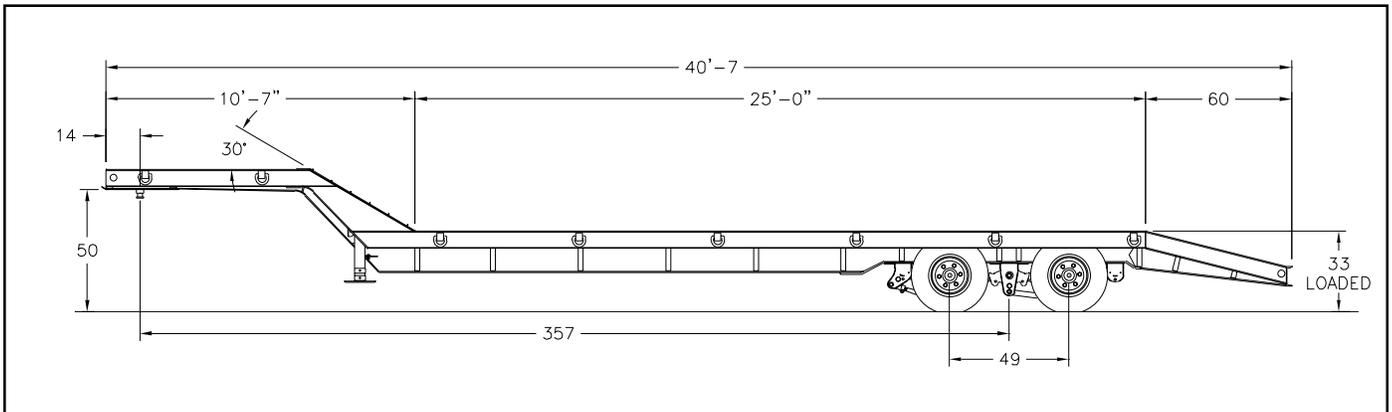

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
TK50LP "Special"	30'	07091	\$28,165	07092	\$28,525

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING INDUSTRIAL TAG TRAILERS OPTIONS

	MODEL	TK32LP	TK40	TK40LP	TK42LP	TK50LP	TK50LP SPECIAL
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE
	DECK:						
02039	Tube arch gooseneck w/ mini 5th wheel	2,130	N/A	N/A	N/A	N/A	N/A
02041	2" kingpin plate (for truck)	480	N/A	N/A	N/A	N/A	N/A
02045	Lockable tool box	0	0	0	0	0	N/A
02046	Enclosed tongue (expanded metal)	130	130	130	130	130	N/A
02033	12,000 lb. H.D.. drop-leg jack w/tool box	0	0	0	0	0	N/A
07756	2-speed landing gear	650	650	650	650	650	650
00103	Platform for tube arch gooseneck	1,160	N/A	N/A	N/A	N/A	N/A
	DECK:						
02066	8'6" deck width	480	480	480			
06526	8'6" deck width				550	STD	STD
06426	9' deck width					550	550
02064	1 3/8" Apitong decking (net)	875	875	875			
02073	1 3/8" apitong deck (net)				950	950	950
02067	Less beavertail & ramps (does not deduct from OAL)	(595)	(595)	(595)	(595)	(595)	(595)
02069	Bucket slot in beavertail	780	780	780	780	780	780
02238	Self-cleaning beavertail - full width	0	0	0	0	0	0
02071	Traction aids over wood on beavertail	545	545	545	545	545	545
00045	D-rings (Ea.)	50	50	50	50	50	50
02137	Recessed D-rings ILO D-rings	135	135	135			
02083	Recessed D-rings ILO D-rings				180	180	180
02082	Recessed D-rings (Ea.)	65	65	65	65	65	65
02236	Stake pockets (ea.)	60	60	60	60	60	60
	BRAKES:						
02054	Electric brakes (15K-lb. axles, 30K-lb. trailer capacity)	(405)	N/A	N/A	N/A	N/A	N/A
02090	Electronic brake control kit (for ABS equipped vehicles)	230	N/A	N/A	N/A	N/A	N/A
	TIRES & WHEELS:						
02195	215/75R17.5 16PR	0	N/A	0	0	0	STD
06284	235/75R17.5 (per tire)	57		57	57	57	57
07758	235/75R 17.5 16PR		0				
00248	255/70R 22.5 (per tire)		(31)				
06283	255/70R22.5 16PR (per tire)	27		N/A	27	27	27
00081	6.75 x 17.5 disc wheels 8-hole pilot mount	0	0	0	0	STD	STD
00243	Disc wheels (22.5 tires)	N/C	N/C	N/A	N/A	N/C	N/C
02091	Spare tire carrier on tongue	140	140	140	140	140	140

*Axles will be 15,000 Lb. capacity: 12 1/4" x 5" brakes and disc wheels, trailer capacity will be 30,000 Lbs.



TRAIL KING INDUSTRIAL TAG TRAILERS OPTIONS

	MODEL	TK32LP	TK40	TK40LP	TK42LP	TK50LP	TK50LP SPECIAL
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE
	RAMPS:						
02074	Heavy duty crawler ramps (wood filled)	255	255	255	255	STD	STD
02075	Center ramp (ladder)	415	415	415	415		
02080	Center ramp (ladder)					460	460
02076	Center ramp (wood filled)	520	520	520	520		
02081	Center ramp (wood filled)					665	665
02077	Spring assist ramps	130	130	130	130	130	130
02079	Ramps slide together (Will have approximately 17" space)	315	315	315	315	315	315
	MISCELLANEOUS:						
06710	LED light package (Grote)	425	425	425	425	425	425
02239	Mud Flaps	105	105	105	105	105	105
06036	Grab hooks with safety chains	185	185	185	185	185	N/A
06713	Air-lift front axle (raises deck height 1 1/2")	N/A	N/A	N/A	4,240	4,240	4,240
06070	Out-of-jig charge	670					
06071	Out-of-jig charge		745	745	N/A	N/A	N/A
02092	Factory installation of electric brake control	230	N/A	N/A	N/A	N/A	N/A
	PAINT: See Trail King Color Chart						




TRAIL KING TKT10U TILT UTILITY TRAILER TKTU SERIES

STANDARD EQUIPMENT

12" X 2" electric brakes on both axles
 Single disc wheel (6-hole)
 ST225/75R x 15-8PR tires
 1½" oak decking (NET)
 Structural channel main frame
 6 D-Rings
 82" deck width between fenders
 102" overall width
 16' tilt deck length
 3 1/2" x 11" cushioning cylinder
 11° load angle
 2 - 6,000-lb. Torflex axles

C-channel crossmembers
 Star traction covered approach
 5,000 lb. jack stand
 14 ga. steel enclosed fenders
 Pintle hitch w/15½" - 22¼" adjustment
 Electrical system per DOT regulations
 Safety chains (less hooks)
 Headboard
 Registration holder
 Breakaway switch (with battery)
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

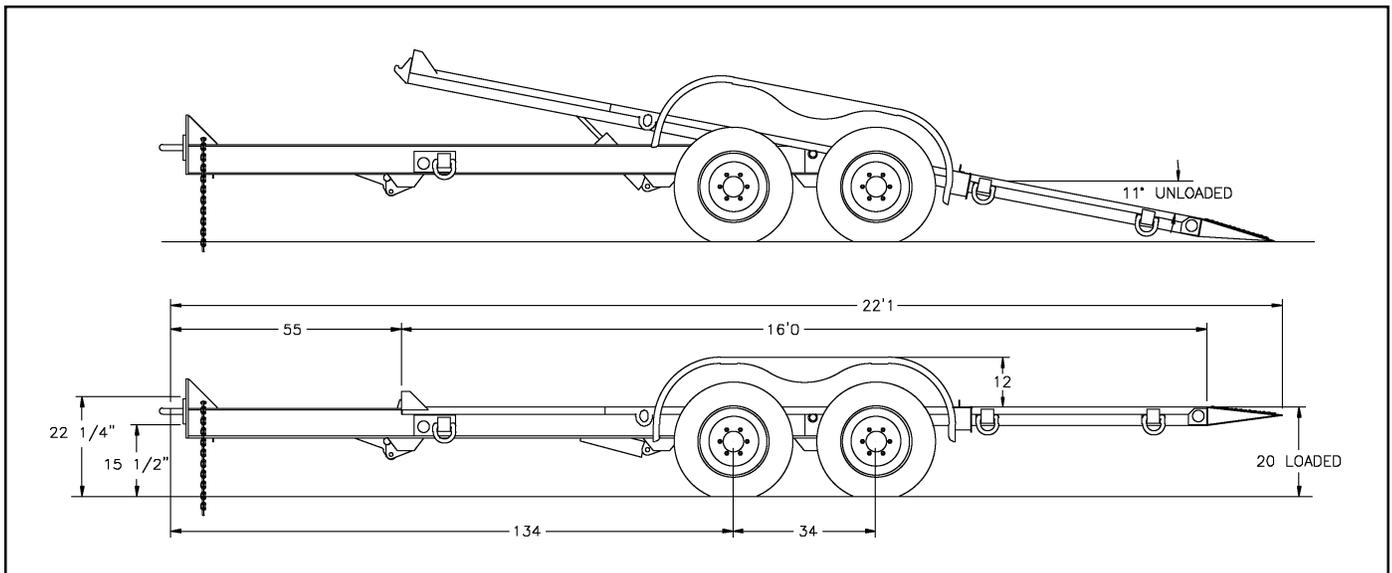

MODEL	LENGTH	ITEM#	RETAIL
TKT10U 10,000 LB. CAPACITY	16'	06356	\$6,755

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TKT12U TILT UTILITY TRAILER TKTU SERIES

STANDARD EQUIPMENT

12" X 2" electric brakes on both axles
 Single disc wheel (8-hole)
 235/85R x 16 radials
 1½" oak decking (NET)
 Structural channel main frame
 6 D-Rings
 82" deck width between fenders
 102" overall width
 16' tilt deck length
 3 1/2" x 11" cushioning cylinder
 12° load angle
 2 - 6,000-lb. Torflex axles

C-channel crossmembers
 Star traction covered approach
 5,000 lb. jack stand
 14 ga. steel enclosed fenders
 Pintle hitch w/17" - 23¼" adjustment
 Electrical system per DOT regulations
 Safety chains (less hooks)
 Headboard
 Registration holder
 Breakaway switch (with cell battery)
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

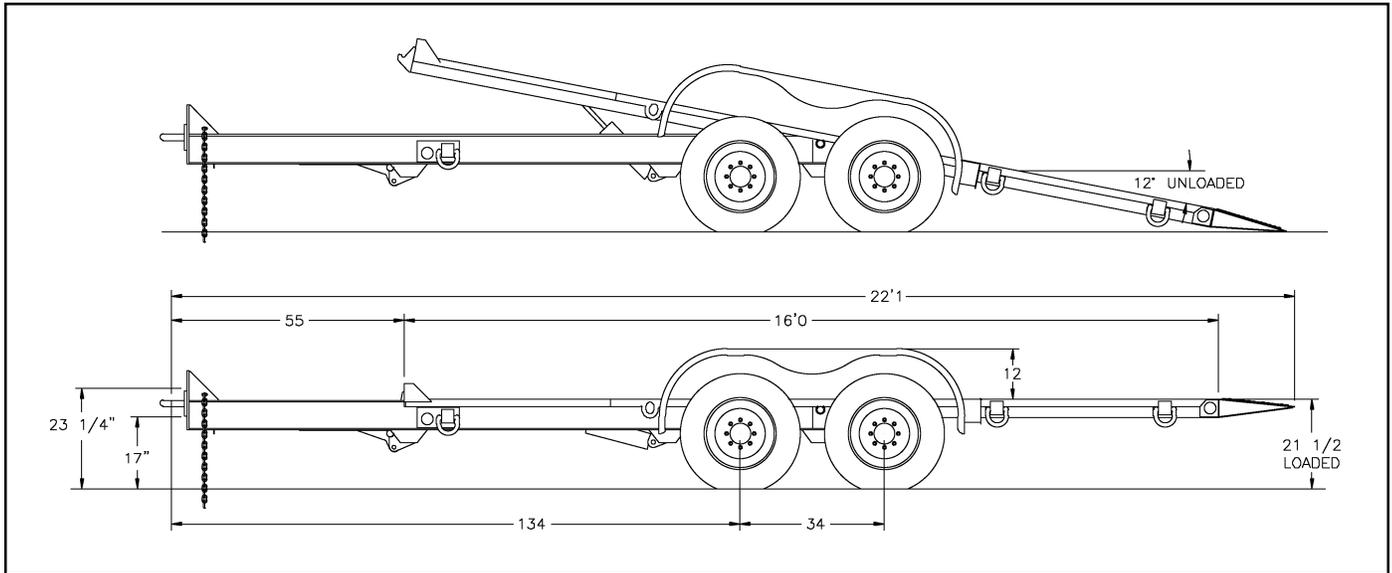

MODEL	LENGTH	ITEM#	RETAIL
TKT12U 12,000 LB. CAPACITY	16'	06357	\$7,035

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TKT14U TILT UTILITY TRAILER TKTU SERIES

STANDARD EQUIPMENT

12" X 2" electric brakes on both axles
 Single disc wheel (8-hole)
 215/75R 17.5 radials
 1½" oak decking (NET)
 Structural channel main frame
 8 D-Rings
 82" deck width between fenders
 102" overall width
 16' tilt deck length
 4' stationary deck
 3 1/2" x 11" cushioning cylinder
 12° load angle

2 - 7,000-lb. Torflex axles
 C-channel crossmembers
 Star traction covered approach
 5,000 lb. jack stand
 14 ga. steel enclosed fenders
 Pintle hitch w/17" - 23¼" adjustment
 Electrical system per DOT regulations
 Safety chains (less hooks)
 Headboard
 Registration holder
 Breakaway switch (with cell battery)
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

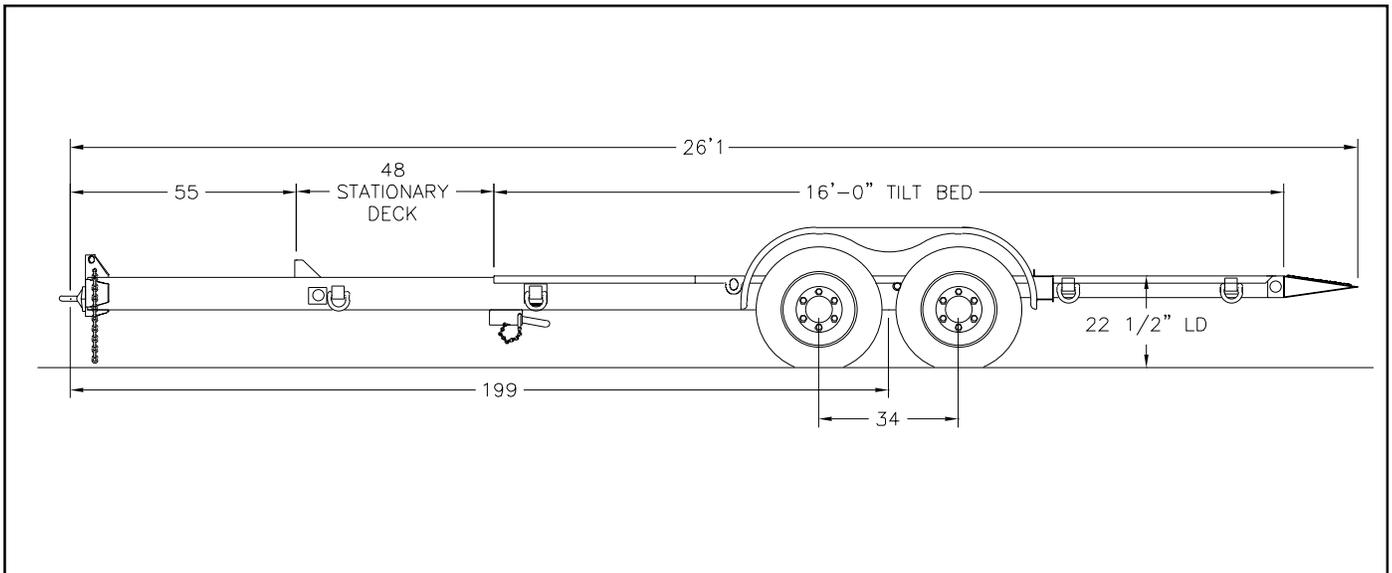

MODEL	LENGTH	ITEM#	RETAIL
TKT14U 14,000 LB. CAPACITY	20'	07090	\$9,480

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TILT UTILITY TRAILERS OPTIONS

	MODEL	TKT10U	TKT12U	TKT14U
ITEM#	ITEM	PRICE	PRICE	PRICE
	HITCH:			
02182	2 5/16" ball hitch	90	90	90
02234	Pintle hitch	0	0	0
06637	Tube arch GN w/ 2 5/16" ball coupler (inc. 4' stat. deck)	3,345	3,345	
06638	Tube arch GN w/ inverted mini 5th wheel (inc. 4' stat deck)	3,365	3,365	
07707	Tube arch GN w/ 2 5/16" ball coupler (inc. 4' stat. deck)			2,850
07708	Tube arch GN w/ inverted mini 5th wheel (inc. 4' stat deck)	2,875		
06436	Center load ramp	390	390	390
06424	12,000 lb H.D. drop leg jack	130	130	130
	BRAKES:			
02197	Electric brakes	0	0	0
02157	*Surge brakes (may not comply with Federal Motor Vehicle Law Section 393.48.)	745		
02158	*Surge brakes (hitch adjustment n/a on TK12U) (Surge brakes may not comply with Federal Motor Vehicle Law Section 393.48.)		765	N/A
06432	Carlisle Hydrastar Brake System (must have surge brakes)	685	685	685
06362	Carlisle Electra-Star brake system	785	785	785
02090	Electronic brake control kit (for ABS equipped vehicles)	230	230	230
	TIRES & WHEELS:			
02185	ST225/75R15	0	N/A	N/A
02184	235/85R16 Radial	N/A	0	N/A
02195	215/75R17.5 16PR	N/A	N/A	STD
	MISCELLANEOUS:			
06698	4' stationary deck	580	580	STD
06722	Apitong decking	500	500	500
07188	LED lights (utility)	150	150	150
00045	D-rings (Ea.)	50	50	50
02236	Stake pockets (ea.)	60	60	60
02098	Tie downs (Ea.)	55	55	55
02091	Spare tire carrier on tongue	140	140	140
02092	Factory installation of electric brake control	230	230	230
	PAINT: See Trail King Color Chart			


*Trail King doesn't recommend ordering trailers equipped with surge brakes, due to the interpretation of the Federal Motor Vehicle Law Section 393.48. This states that brakes must be in operation at all times. Surge brakes do not conform to these requirements.



TRAIL KING TKT18 INDUSTRIAL TILT TRAILER TKT SERIES

STANDARD EQUIPMENT

- | | |
|---|--|
| <ul style="list-style-type: none"> 2 - 9,000 lb. axles 12 1/4" x 3 3/8" electric brakes Tandem dual disc wheels (8-hole) 235/85R 16 radials Oil seals 1 1/2" oak decking (raised) (NET) 4" I-beam crossmembers on 16" centers 6 D-rings 96" deck width 24' deck length 33" loaded deck height 11" fold-down approach plate and underride protection | <ul style="list-style-type: none"> 3 1/2" x 16" platform cushioning cylinder Tilted deck angle - 12 degrees 12,000 lb. H.D. drop-leg jack w/tool box Pintle hitch w/17 1/2" - 28 3/4" adjustment Breakaway switch (less battery) Safety chains (less hooks) Headboard Registration holder Electrical system per DOT regulations Mud flaps Red & white conspicuity markings Color: Trail King 2-part polyurethane |
|---|--|

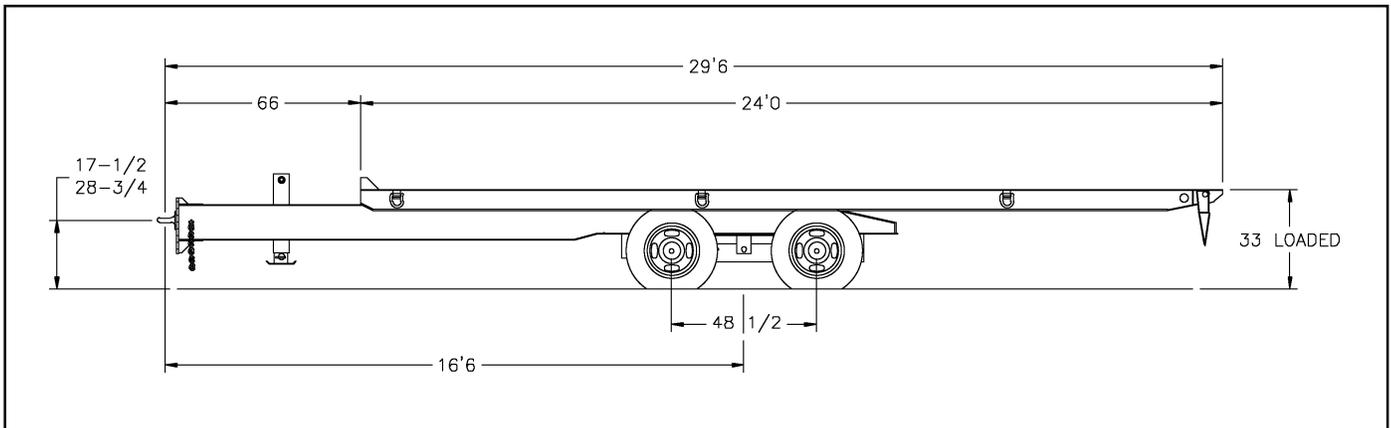

MODEL	LENGTH	ITEM#	RETAIL
TKT18 18,000 LB. CAPACITY	24'	02100	\$16,965

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TKT20 INDUSTRIAL TILT TRAILER TKT SERIES

STANDARD EQUIPMENT

2 - 10,000 lb. axles
 12 1/4" x 3 3/8" electric brakes - general duty
 12 1/4" x 4" electric brakes - heavy duty
 Tandem dual disc wheels (8-hole)
 235/85R 16 radials
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 16" centers
 6 D-rings
 96" deck width
 24' deck length
 33" loaded deck height
 11" fold-down approach plate and underride protection

3 1/2" x 16" platform cushioning cylinder
 Tilted deck angle - 12 degrees
 12,000 lb. H.D. drop-leg jack w/tool box
 Pintle hitch w/17 1/2" - 28 3/4" adjustment
 Breakaway switch (less battery)
 Safety chains (less hooks)
 Headboard
 Registration holder
 Rubber mounted sealed lights and sealed harness system
 Electrical system per DOT regulations
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

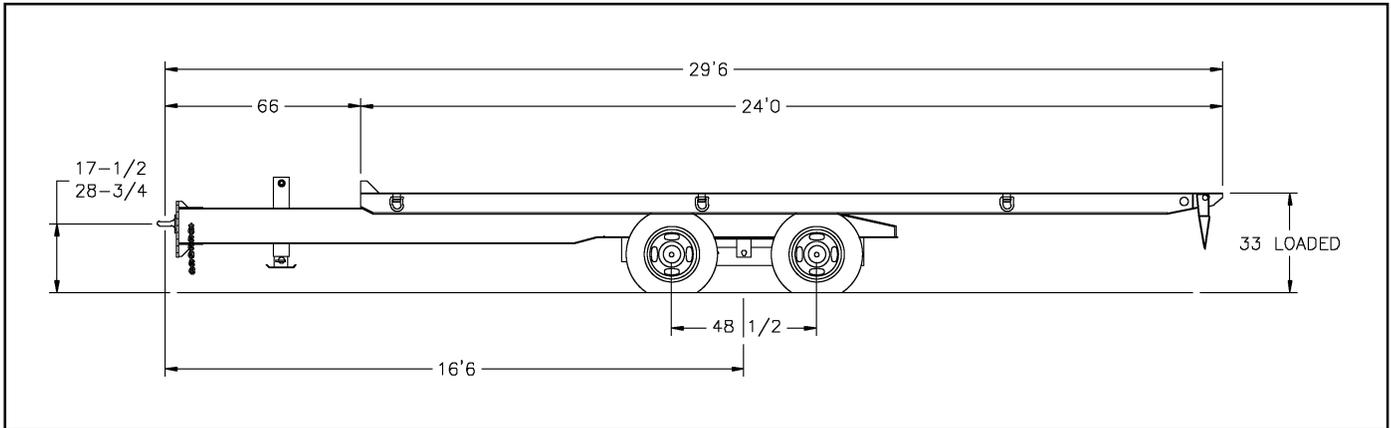

MODEL	LENGTH	ITEM#	RETAIL GENERAL DUTY DEXTER 10K AXLE	ITEM #	RETAIL HEAVY DUTY DEXTER 10K AXLE
-------	--------	-------	---	--------	---

TKT20	20,000 LB. CAPACITY	24'	02101	\$16,895	02102	\$17,565
-------	---------------------	-----	-------	----------	-------	----------

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TKT24 INDUSTRIAL TILT TRAILER TKT SERIES

STANDARD EQUIPMENT

2 - 12,000 lb. axles	3 1/2" x 16" platform cushioning cylinder
12 1/4" x 5" electric brakes	Tilted deck angle - 12 degrees
Tandem dual disc wheels (8-hole)	12,000 lb. H.D. drop-leg jack w/tool box
235/85R 16 radials	Pintle hitch w/17 1/2" - 28 3/4" adjustment
Oil seals	Breakaway switch (less battery)
1 1/2" oak decking (raised) (NET)	Safety chains (less hooks)
4" I-beam crossmembers on 16" centers	Headboard
6 D-rings	Registration holder
96" deck width	Electrical system per DOT regulations
24' deck length	Mud flaps
33" loaded deck height	Red & white conspicuity markings
11" fold-down approach plate and underride protection	Color: Trail King 2-part polyurethane

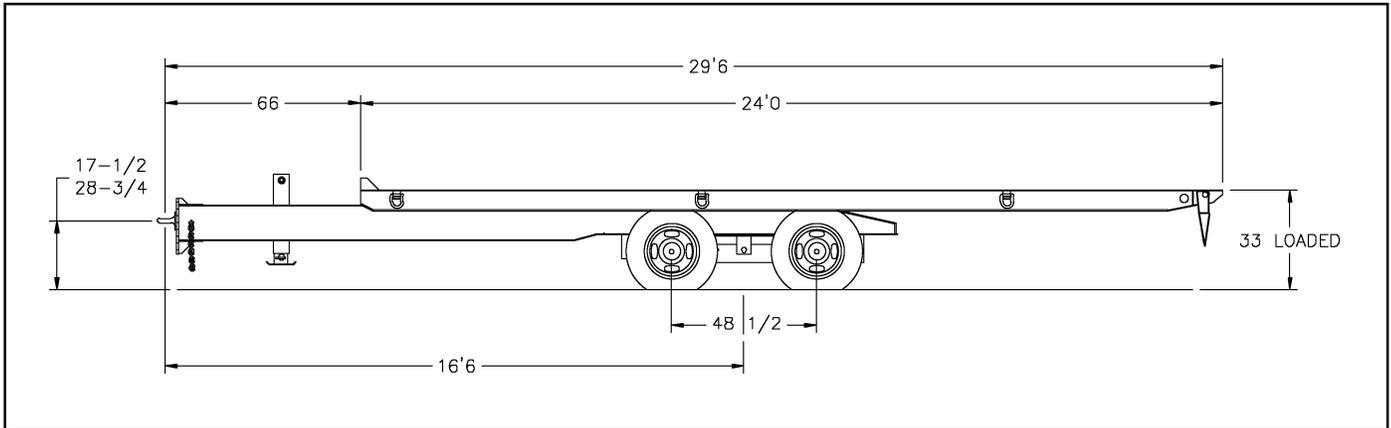

MODEL	LENGTH	ITEM#	RETAIL
TKT24 24,000 LB. CAPACITY	24'	02105	\$18,905

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.




TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TKT32 INDUSTRIAL TILT TRAILER TKT SERIES

STANDARD EQUIPMENT

- 2 - 20,000 lb. axles
- 12 1/4" x 7 1/2" air brakes
- *Anti-lock brake system
- Disc wheels 8-hole pilot mount, dual rims
- 215/75R17.5 16PR radial tires
- Oil seals
- 1 1/2" oak decking (raised) (NET)
- 4" I-beam crossmembers on 16" centers
- 6 D-rings
- 96" deck width
- 24' deck length
- 32" loaded deck height
- Automatic slack adjusters
- 11" fold-down approach plate and underride protection
- 2 - 3 1/2" x 16" platform cushioning cylinders
- Tilted deck angle - 12 degrees
- 12,000 H.D. lb. drop-leg jack w/tool box
- Pintle hitch w/17" - 28 1/4" adjustment
- Safety chains (less hooks)
- Headboard
- Registration holder
- Electrical system per DOT regulations
- Mud flaps
- Red & white conspicuity markings
- Color: Trail King 2-part polyurethane

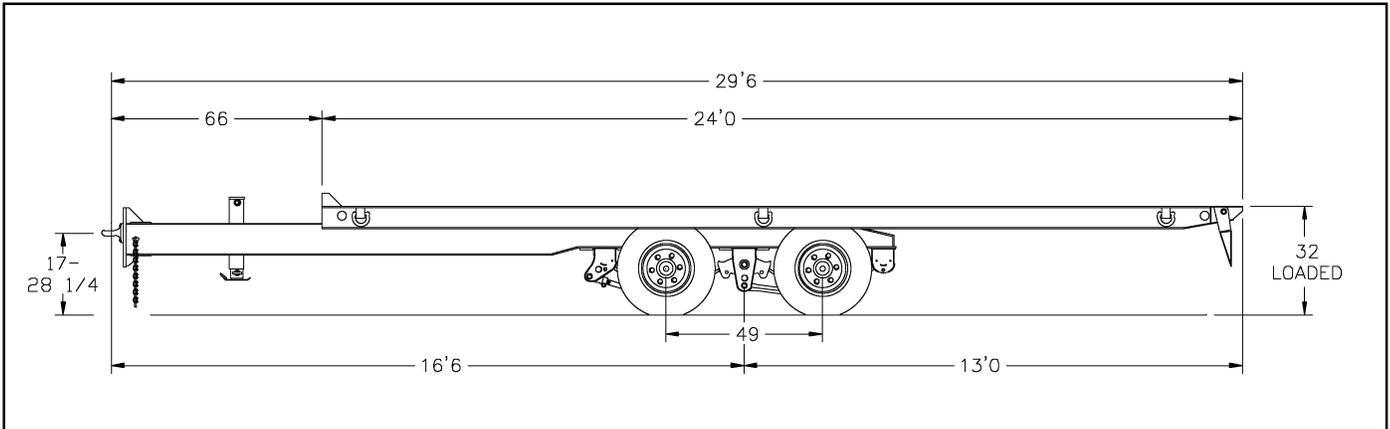

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------	---------------	--------	---------------

TKT32	32,000 LB. CAPACITY	24'	02106	\$23,850	02251	\$24,205
-------	---------------------	-----	-------	----------	-------	----------

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING INDUSTRIAL TILT TRAILERS OPTIONS

	MODEL	TKT18	TKT20	TKT24	TKT32
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE
	HITCH:				
02110	7' tongue ILO standard	255	255		
02111	7' tongue ILO standard			315	315
02112	Lockable tool box	0	0	0	0
02046	Enclosed tongue (expanded metal)	130	130	130	130
07174	Tube arch gooseneck w/ mini-5th wheel (inc. 2' stat deck)	2,950	2,950	2,950	2,950
02117	2" kingpin plate	470	470	470	470
02203	12,000 lb. H.D. drop-leg jack with tool box	0	0	0	0
	DECK:				
02127	8'6" deck width	350			
02062	8'6" deck width		375	375	
02066	8'6" deck width				480
06723	4' stationary deck	1,360	1,360	1,360	
06724	4' stationary deck				1,480
02065	1 3/8" apitong deck (NET)	875	875	875	875
02133	Star traction (2' each side) of approach plate	145	145	145	145
02134	Self-cleaning rear deck	755	755	755	755
02135	Traction aids on rear deck	515	515	515	515
02136	Electric/hydraulic tilt. Operated off power cord from tow vehicle. (TKT50 only: Includes upgrade to 5" x 16" cylinders.)	2,275	2,275	2,275	2,275
06363	PTO hydraulics - power up and down. (TKT50 only: Includes upgrade to 5" x 16" cylinders.)	1,340	1,340	1,340	1,340
00045	D-rings (Ea.)	50	50	50	50
02137	Recessed D-rings ILO D-rings	135	135	135	135
00046	Recessed d-rings (ea)	65	65	65	65
02236	Stake pockets (ea.)	60	60	60	60
02148	3" high deck rail	495	495	495	495
02091	Spare tire carrier on tongue	140	140	140	140
02138	Air operated approach plate (must have air brakes)	N/A	390	390	390
	BRAKES:				
02221	Electric brakes	0	0	0	
02054	Electric brakes (15K-lb. axles, 30K-lb. trailer capacity)				(405)
02121	2S1M ABS air-brakes (must include H.D. axle)	N/A	2,490		
05036	4S2M ABS air-brakes (must include H.D. axle)	N/A	2,865		
02226	2S1M ABS air-brakes	N/A		2,995	
05037	4S2M ABS air-brakes	N/A		3,360	
02227	Full air brakes	N/A			0
06433	Hutch 9700 suspension w/ elec brakes	595	595	595	STD
02089	Recessed D-rings ILO D-rings	180	180	180	180
02090	Electronic brake control kit (for ABS equipped vehicles)	230	230	230	N/A

*Axles will be 15,000 lb. Capacity: 12 1/4x5" brakes & disc wheels, tow capacity will be 30,000 lbs.



TRAIL KING INDUSTRIAL TILT TRAILERS OPTIONS


	MODEL	TKT18	TKT20	TKT24	TKT32
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE
	TIRES & WHEELS:				
02184	235/85R16 Radial	0	0	0	N/A
02195	215/75R17.5 16PR	N/A	N/A	N/A	0
06284	235/75R17.5 (per tire)	N/A	N/A	N/A	57
06283	255/70R22.5 16PR (per tire)	N/A	N/A	N/A	27
00081	6.75 x 17.5 disc wheels 8-hole pilot mount	N/A	N/A	N/A	0
02243	Disc wheels (for 22.5 tires)	N/A	N/A	N/A	0
	MISCELLANEOUS:				
06036	Grab hooks with safety chains	185	185	185	185
06460	Single air switch w/ dual locks (must be on air)	N/A	765	765	765
06710	LED light package (Grote)	425	425	425	425
02092	Factory installation of electric brake control	230	230	230	N/A
	PAINT: See Trail King Color Chart				



TRAIL KING TKT40 INDUSTRIAL TILT TRAILER TKT SERIES

STANDARD EQUIPMENT

- | | |
|---|--|
| <ul style="list-style-type: none"> 2 - 20,000 lb. axles 12 1/4" x 7 1/2" air brakes *Anti-lock brake system Disc wheels 8-hole pilot mount, dual rims Oil seals 1 1/2" oak decking (raised) (NET) 4" I-beam crossmembers on 12" centers 6 D-rings 96" deck width 24' deck length 35" loaded deck height (TKT40) (235/75R17.5 tires) 32" loaded deck height (TKT40LP) (215/75R17.5 tires) Automatic slack adjusters | <ul style="list-style-type: none"> 11" fold-down approach plate and underride protection 2 - 3 1/2" x 16" platform cushioning cylinders Tilted deck angle - 40 = 15°, 40LP = 12° 12,000 lb. H.D. drop-leg jack w/tool box Pintle hitch w/18" - 29 1/4" adjustment (TKT40) Pintle hitch w/17" - 32 3/4" adjustment (TKT40LP) Safety chains (less hooks) Headboard Registration holder Electrical system per DOT regulations Mud flaps Red & white conspicuity markings Color: Trail King 2-part polyurethane |
|---|--|

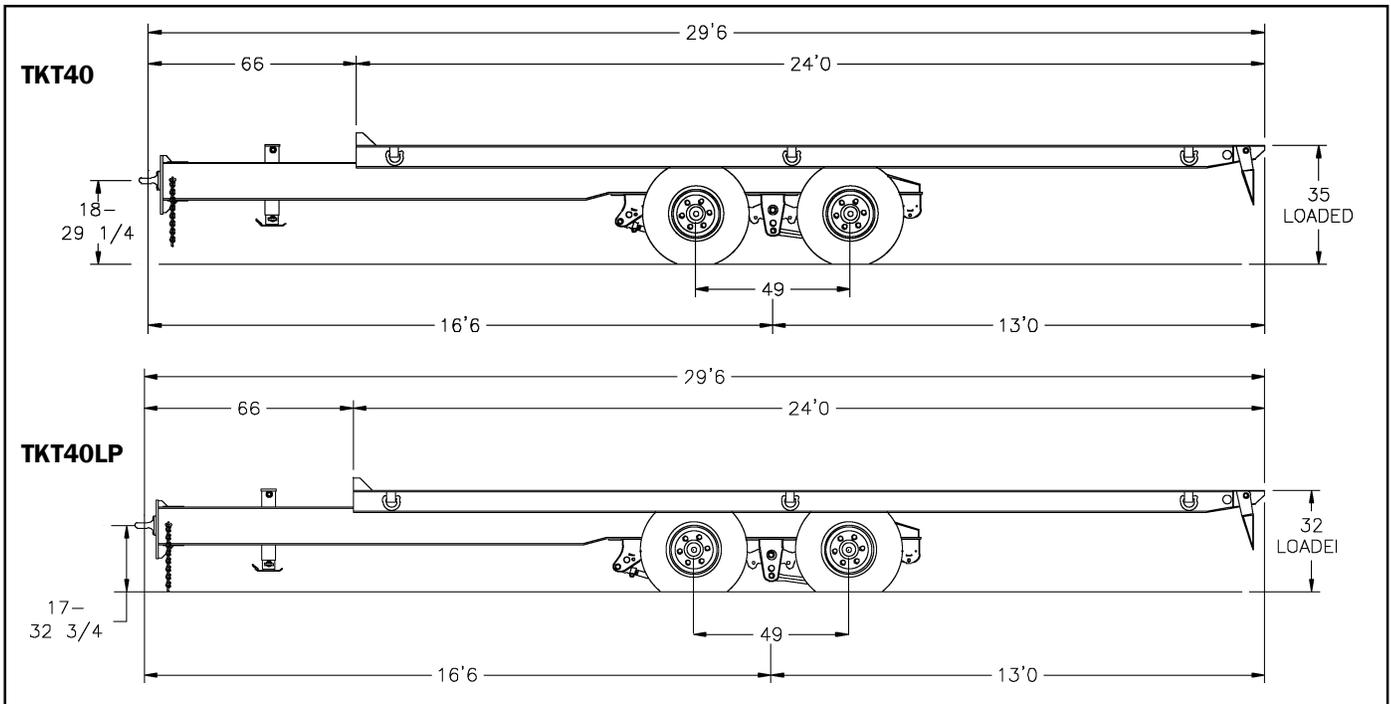

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------	---------------	--------	---------------

40,000 LB. CAPACITY

TKT40	24'	02107	\$24,225	02252	\$24,590
TKT40LP	24'	06486	\$24,225	06487	\$24,590

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TKT50 TANDEM INDUSTRIAL TILT TRAILER TKT SERIES

STANDARD EQUIPMENT

50,000 lb. payload capacity at hwy. speed
 2 - 20,000 lb. axles
 12¹/₄" x 7¹/₂" air brakes
 *Anti-lock brake system
 235/75R17.5 radial tires
 Disc wheels 8-hole pilot mount, dual rims
 Oil seals
 Spring suspension
 Telescopic pin-type parking stands
 14" kingpin setting w/78" swing clearance
 10 D-rings
 11" fold-down approach plate and underride protection
 1¹/₂" oak decking (raised) (NET)
 4" I-beam crossmembers on 12" centers

102" deck width
 Deck length - 28' (24' tilt - 4' stationary)
 Deck length - 30' (24' tilt - 6' stationary)
 Loaded deck height - 36"
 Loaded 5th wheel height - 48"
 8' 10" x 8' full width upper deck
 2 - 3.5" x 16" platform cushioning cylinders
 Tilted deck angle - 14°
 Rubber mounted sealed beam lights and sealed electrical system
 Electrical system per ICC/DOT regulations
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

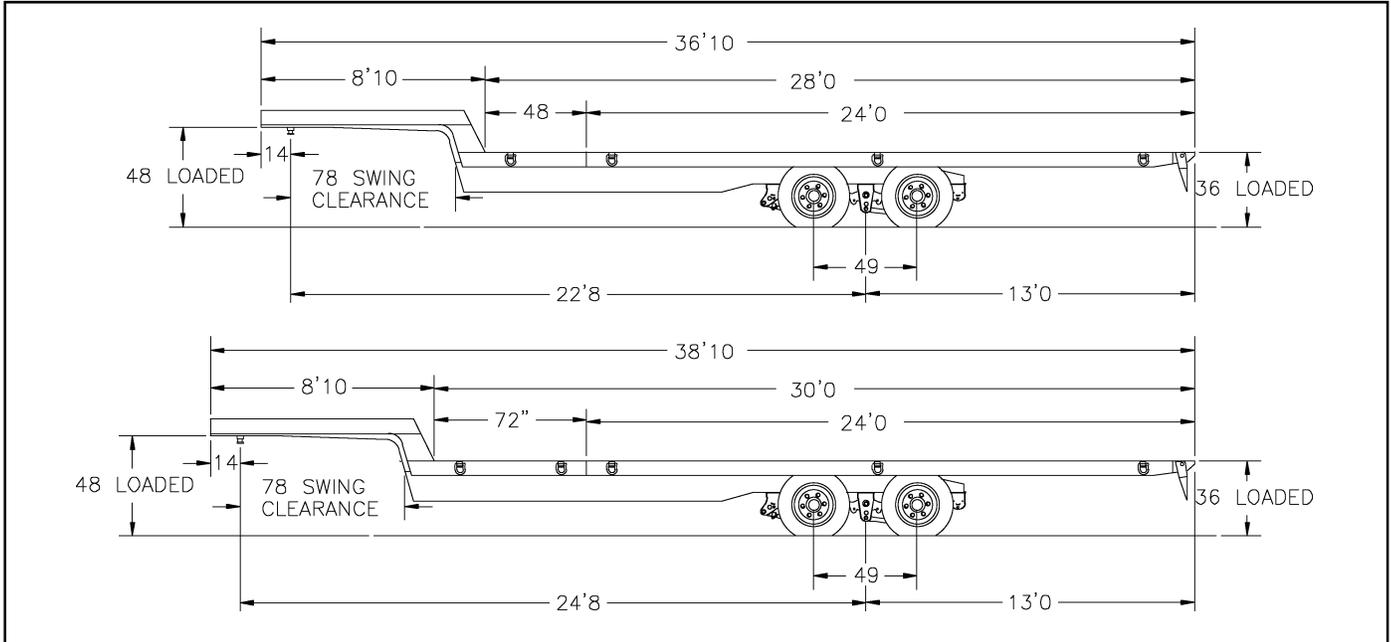

MODEL	LENGTH	DECK LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------------	-------	------------	--------	------------

TKT50 TANDEM

50,000 LB. CAPACITY	37'	28'	05527	\$33,280	05529	\$33,625
50,000 LB. CAPACITY	39'	30'	05528	\$34,355	05530	\$34,705

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TKT50 INDUSTRIAL TILT TRAILER TKT SERIES

STANDARD EQUIPMENT

3 - 20,000 lb. axles
 12 1/4" x 7 1/2" air brakes
 *Anti-lock brake system
 Disc wheels 8-hole pilot mount, dual rims
 215/75R17.5 - 16PR radial tires
 Oil seals
 1 1/2" oak decking (raised) (NET)
 4" I-beam crossmembers on 12" centers
 8 D-rings
 102" deck width
 28' deck length (24' tilt - 4' stationary)
 32" loaded deck height
 11" fold-down approach plate and underride protection

Automatic slack adjusters
 Adjustable 4-bolt pintle hitch with 20,000 lb. vertical capacity and 100,000 lb. pull capacity
 2 - 3.5" x 16" platform cushioning cylinders
 Tilted deck angle - 12°
 12,000 lb. H.D. drop-leg jack w/tool box
 Pintle hitch w/14 1/4" - 27 3/4" adjustment
 Safety chains (less hooks)
 Headboard
 Registration holder
 Electrical system per DOT regulations
 Mud flaps
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

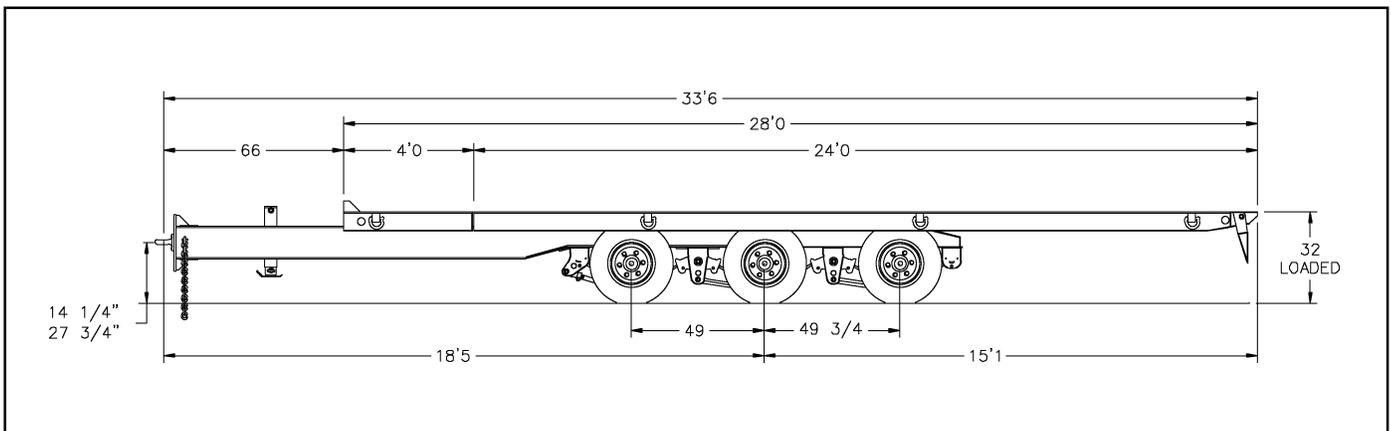

MODEL	LENGTH	ITEM#	W/ABS 2S1M	ITEM #	W/ABS 4S2M
-------	--------	-------	---------------	--------	---------------

TKT50 50,000 LB. CAPACITY	28'	02109	\$32,870	02253	\$33,860
------------------------------	-----	-------	----------	-------	----------

* To meet 1997 federal requirements, Trail King offers two variations of the anti-lock braking system. The minimum 2S1M system is available, but Trail King recommends the 4S2M system.

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING INDUSTRIAL TILT TRAILERS OPTIONS

ITEM#	MODEL ITEM	TKT40	TKT50	TKT50
		PRICE	PRICE	PRICE
			3 AXLE	2 AXLE
	HITCH:			
02111	7' tongue ILO standard	315	315	N/A
02112	Lockable tool box	0	0	N/A
02046	Enclosed tongue (expanded metal)	130	130	N/A
02203	12,000 lb. H.D. drop-leg jack with tool box	00	N/A	
	DECK:			
02129	8'6" deck width	480	STD	STD
06724	4' stationary deck	1,480	STD	STD
02065	1 3/8" apitong deck (NET)	875		
02073	1 3/8" apitong deck (net)		950	950
02133	Star traction (2' each side) of approach plate	145	145	145
02134	Self-cleaning rear deck	755	755	755
02135	Traction aids on rear deck	515	515	515
02136	Electric/hydraulic tilt. Operated off power cord from tow vehicle. (TKT50 only: Includes upgrade to 5" x 16" cylinders.)	2,275	2,275	2,275
06363	PTO hydraulics - power up and down. (TKT50 only: Includes upgrade to 5" x 16" cylinders.)	1,340	1,340	1,340
00045	D-rings (Ea.)	50	50	50
02137	Recessed D-rings ILO D-rings	135		
02083	Recessed D-rings ILO D-rings	180	180	
00046	Recessed d-rings (ea)	65	65	65
02236	Stake pockets (ea.)	60	60	60
02148	3" high deck rail	495		
02219	3" high deck rail		560	560
02091	Spare tire carrier on tongue	140	140	N/A
02138	Air operated approach plate (must have air brakes)	390	390	390
	BRAKES:			
02227	Full air brakes	0	0	0
	TIRES & WHEELS:			
02195	215/75R17.5 16PR	0		
07758	235/75R 17.5 16PR	0	0	
06284	235/75R17.5 (per tire)			57
00248	255/70R 22.5 (per tire)	(31)		(31)
06283	255/70R22.5 16PR (per tire)		27	
00081	6.75 x 17.5 disc wheels 8-hole pilot mount	0	0	0
02243	Disc wheels (for 22.5 tires)	0	0	0
	MISCELLANEOUS:			
06036	Grab hooks with safety chains	185	185	N/A
06460	Single air switch w/ dual locks (must be on air)	765	765	765
06713	Air-lift front axle (raises deck height 1 1/2")	N/A	4,240	N/A
	PAINT: See Trail King Color Chart			




TRAIL KING TK6U UTILITY TRAILER TKU SERIES

STANDARD EQUIPMENT

10" X 2" electric brakes on both axles
 Single disc wheel (6-hole)
 ST205/75R x 15-6 PR
 1½" oak decking (NET)
 Structural I-beam main frame
 6 tie-down bars
 82" deck width between fenders
 102" overall width
 12' deck length
 18½" loaded deck height
 2 - 3,500 lb. Torflex axles

5' self-supporting loading ramps (18" wide) spring assist
 5,000 lb. jack
 H.D. enclosed fenders
 Pintle hitch w/adjustment
 Electrical system per DOT regulations
 Breakaway switch (with battery)
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

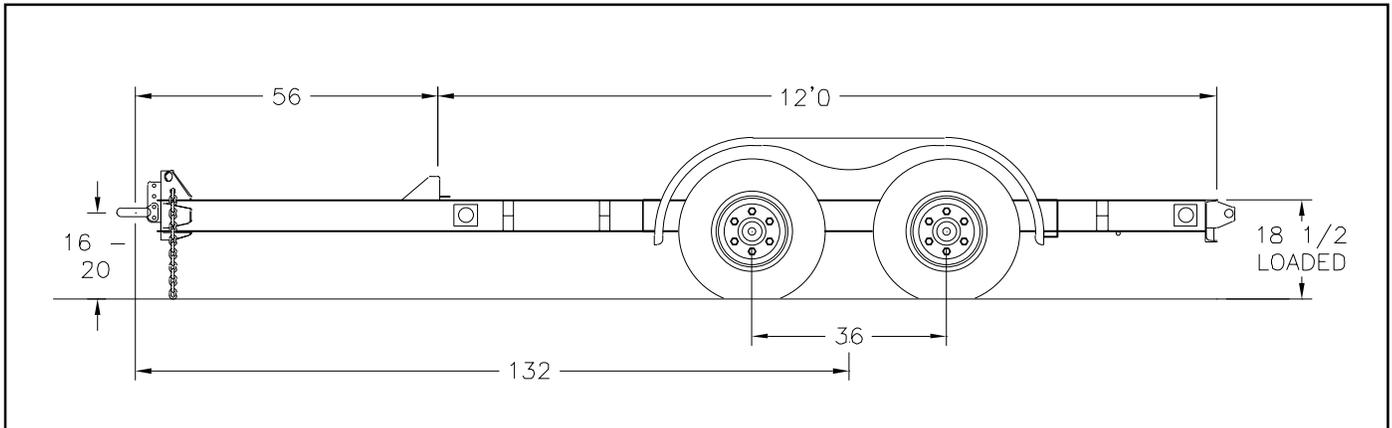

MODEL	LENGTH	ITEM#	RETAIL
TK6U 6,000 LB. CAPACITY	12'	02149	\$5,645

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK8U UTILITY TRAILER TKU SERIES

STANDARD EQUIPMENT

12" X 2" electric brakes on both axles
 Single disc wheel (6-hole)
 ST225/75R x 15-8 ply
 1½" oak decking (NET)
 Structural I-beam main frame
 6 tie-down bars
 82" deck width between fenders
 102" overall width
 16' deck length
 20" loaded deck height
 2 - 6,000 lb. Torflex axles

5' self-supporting loading ramps (18" wide) spring assist
 5,000 lb. jack
 H.D. enclosed fenders
 Pintle hitch w/adjustment
 Electrical system per DOT regulations
 Breakaway switch (with battery)
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 GVWR less than 10,000 lbs.
 Color: Trail King 2-part polyurethane

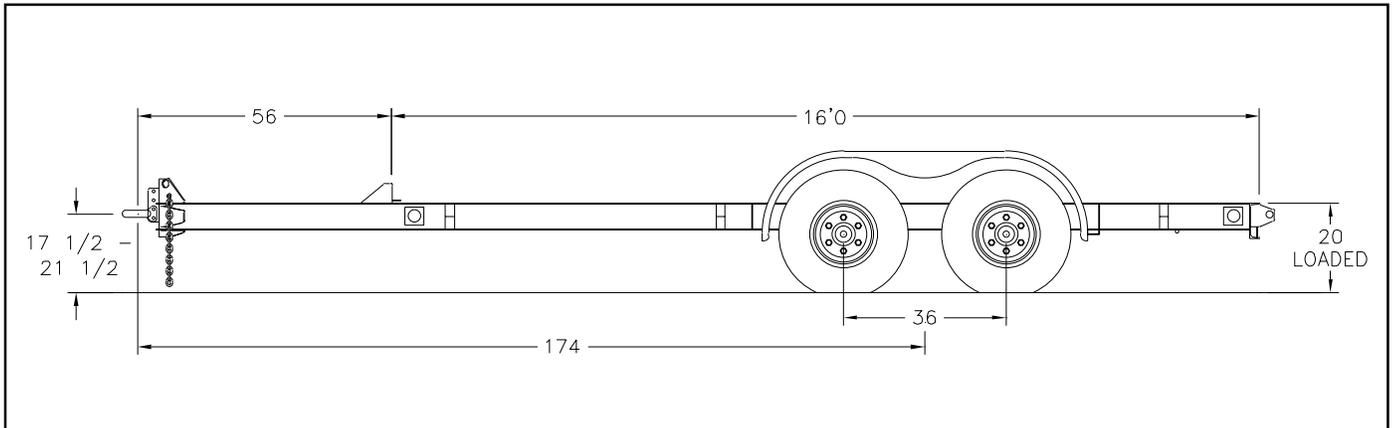

MODEL	LENGTH	ITEM#	RETAIL
TK8U 8,000 LB. CAPACITY	16'	06721	\$6,080

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK10U UTILITY TRAILER TKU SERIES

STANDARD EQUIPMENT

12" X 2" electric brakes on both axles
 Single disc wheel (6-hole)
 ST225/75R x 15-8 ply
 1½" oak decking (NET)
 Structural I-beam main frame
 6 tie-down bars
 82" deck width between fenders
 102" overall width
 16' deck length
 20" loaded deck height
 2 - 6,000 lb. Torflex axles

5' self-supporting loading ramps (18" wide) spring assist
 5,000 lb. jack
 H.D. enclosed fenders
 Pintle hitch w/adjustment
 Electrical system per DOT regulations
 Breakaway switch (with battery)
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

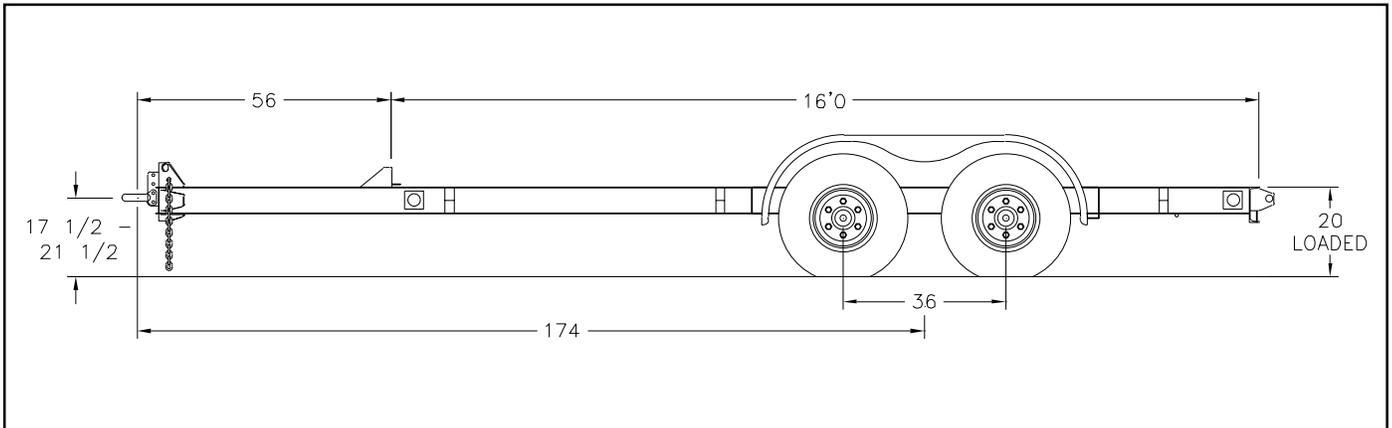

MODEL	LENGTH	ITEM#	RETAIL
TK10U 10,000 LB. CAPACITY	16'	02151	\$6,080

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK12U UTILITY TRAILER TKU SERIES

STANDARD EQUIPMENT

12" X 2" electric brakes on both axles
 Single disc wheel (6-hole)
 235/85R x 16 radials
 1½" oak decking (NET)
 Structural I-beam main frame
 6 tie-down bars
 82" deck width between fenders
 102" overall width
 16' deck length
 21½" loaded deck height
 2 - 6,000 lb. Torflex axles

5' self-supporting loading ramps (18" wide) spring assist
 5,000 lb. jack stand
 H.D. enclosed fenders
 Pintle hitch w/adjustment
 Electrical system per DOT regulations
 Breakaway switch (with battery)
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

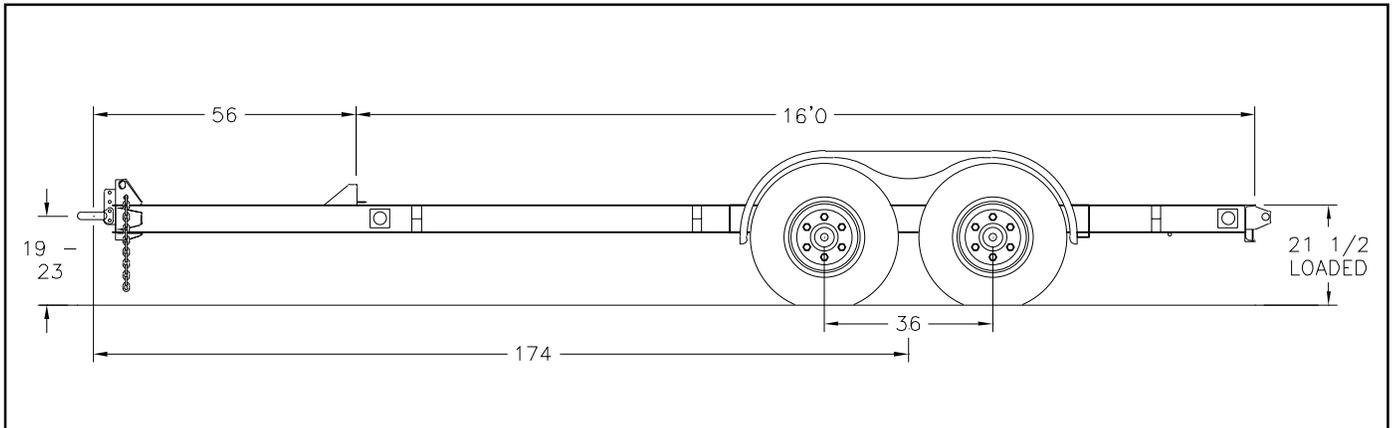

MODEL	LENGTH	ITEM#	RETAIL
TK12U 12,000 LB. CAPACITY	16'	02152	\$6,360

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK14U UTILITY TRAILER TKU SERIES

STANDARD EQUIPMENT

12" X 2" electric brakes on both axles
 Single disc wheel (8-hole)
 215/75R17.5
 1½" oak decking (NET)
 8" structural I-beam main frame
 6 tie-down bars
 82" deck width between fenders
 102" overall width
 16' deck length
 22" loaded deck height
 2 - 7,000 lb. Torflex axles

5' self-supporting loading ramps (18" wide) spring assist
 5,000 lb. jack stand
 H.D. enclosed fenders
 Pintle hitch w/adjustment
 Electrical system per DOT regulations
 Breakaway switch (with battery)
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

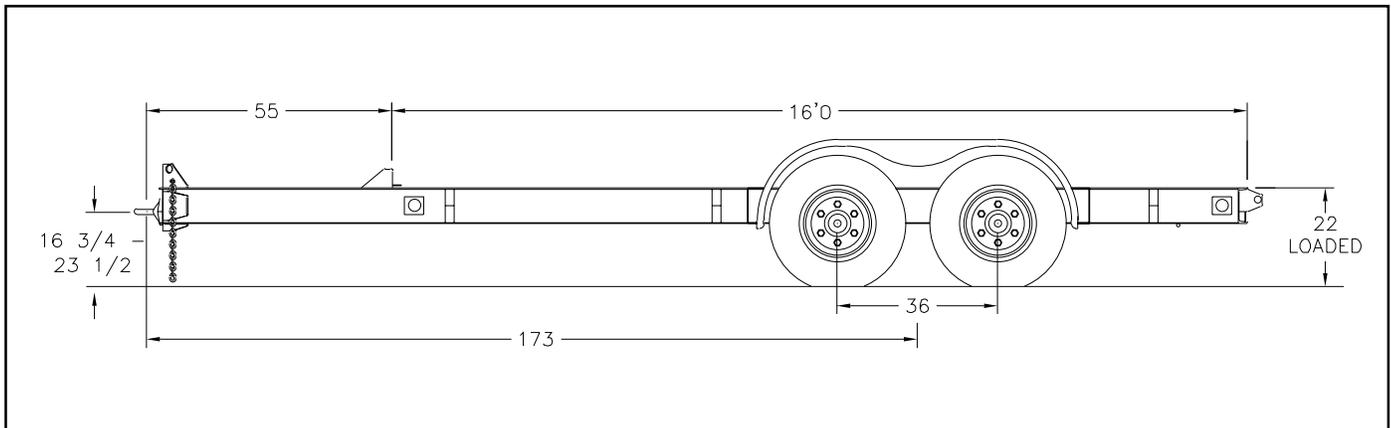

MODEL	LENGTH	ITEM#	RETAIL
TK14U 14,000 LB. CAPACITY	16'	06983	\$8,125

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION


ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING TK18U UTILITY TRAILER TKU SERIES

STANDARD EQUIPMENT

12" X 2" electric brakes on both axles
 Single disc wheel (6-hole)
 235/85R16 radials
 1½" oak decking (NET)
 Structural I-beam main frame
 6 tie-down bars
 82" deck width between fenders
 102" overall width
 20' deck length (18' flatbed - 2' beavertail)
 23½" loaded deck height
 3 - 6,000 lb. Torflex axles

5' self-supporting loading ramps (18" wide) spring assist
 5,000 lb. jack stand
 H.D. enclosed fenders
 Pintle hitch w/adjustment
 Electrical system per DOT regulations
 Breakaway switch (with battery)
 Safety chains (less hooks)
 Headboard
 Registration holder
 Red & white conspicuity markings
 Color: Trail King 2-part polyurethane

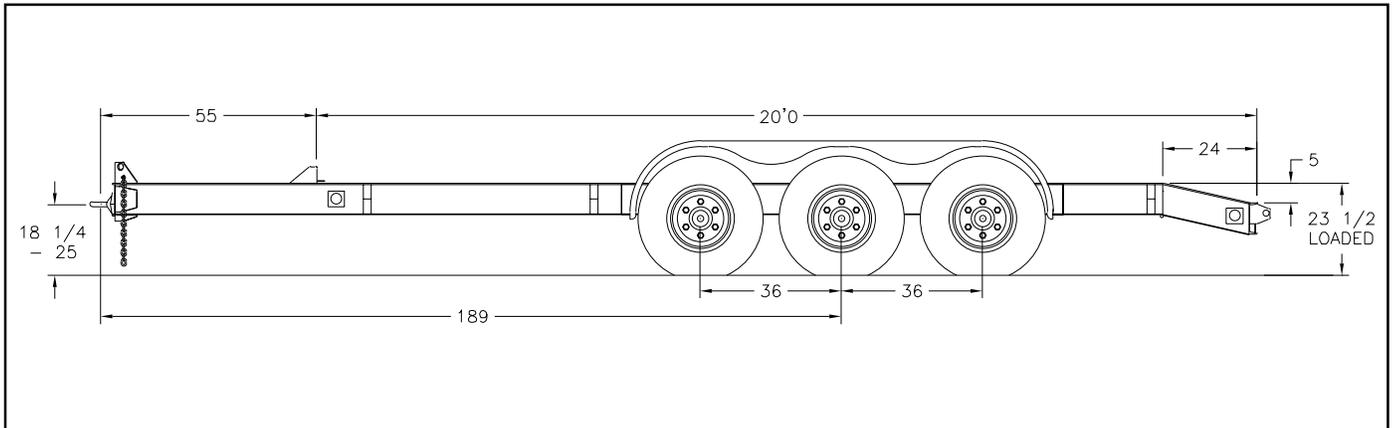

MODEL	LENGTH	ITEM#	RETAIL
TK18U 18,000 LB. CAPACITY	20'	02256	\$9,485

CAPACITY RATINGS ARE FRAME CAPACITIES ONLY. ACTUAL LOAD CAPACITIES MAY BE RESTRICTED BY FACTORS SUCH AS GROSS AXLE WEIGHT RATINGS (GAWR) OR STATE AND FEDERAL REGULATIONS.

FEDERAL RETAIL EXCISE TAX MUST BE FIGURED ON THE SELLING PRICE WHEN SELLING TO A NON-EXEMPT END USER.



TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING UTILITY TRAILERS OPTIONS

	MODEL	TK6U	TK8U	TK10U	TK12U	TK14U	TK18U
ITEM#	ITEM	PRICE	PRICE	PRICE	PRICE	PRICE	PRICE
	HITCH:						
02182	2 5/16" ball hitch	90	90	90	90	90	90
02234	Pintle hitch	0	0	0	0	0	0
02036	Tube arch gooseneck w/ 2 5/16" ball coupler	1,935	1,935	1,935	1,935	1,935	1,935
02038	Tube arch gooseneck w/ mini-5th wheel (2" KP)	1,965	1,965	1,965	1,965	1,965	1,965
02155	Enclosed tongue (expanded metal)	130	130	130	130	130	130
06727	Lockable tool box (split lid)	320	320	320	320	320	320
	DECK:						
06266	Oak Decking (1 1/2" net)	0	0	0	0	0	0
06722	Apitong decking	500	500	500	500	500	500
00045	D-rings (Ea.)	50	50	50	50	50	50
02236	Stake pockets (ea.)	60	60	60	60	60	60
02098	Tie downs (Ea.)	55	55	55	55	55	55
02091	Spare tire carrier on tongue	140	140	140	140	140	140
	BRAKES:						
02197	Electric brakes	0	0	0	0	0	0
02235	*Surge brakes (may not comply with Federal Motor Vehicle Law Section 393.48)	435	435				
02157	*Surge brakes (may not comply with Federal Motor Vehicle Law Section 393.48)			745			
02158	*Surge brakes (hitch adjustment n/a on TK12U) <small>(Surge brakes may not comply with Federal Motor Vehicle Law Section 393.48.)</small>				765		
07678	*Surge brakes (hitch adjustment n/a on TK14U) <small>(Surge brakes may not comply with Federal Motor Vehicle Law Section 393.48.)</small>					880	N/A
06432	Carlisle Hydrastar Brake System (must have surge brakes)	685	685	685	685	N/A	N/A
06697	Carlisle Electra Star Brake Controller	785	785	785	785	785	785
02090	Electronic brake control kit (for ABS equipped vehicles)	230	230	230	230	230	230
	TIRES & WHEELS:						
07189	7,000lb axles w/ /8-hole wheels (per axle)	150	150	150	150	150	150
02183	ST205/75R15 PR	0					
02185	ST225/75R15		0	0			
02184	235/85R16 Radial				0		0
02195	215/75R17.5 16PR					STD	
	RAMPS:						
02186	5' ladder type ramps (18" wide)	0	0	0	0	0	0
02161	5' wood filled ramps ILO Std (18" wide)	255	255	255	255	255	255
02162	5' star traction ramps ILO Std (18" wide)	215	215	215	215	215	215
02163	Less standard ramps	(260)	(260)	(260)	(260)	(260)	(260)
02164	24" beavertail (does not add to AOL)	275	275	275	275	275	STD
02166	Center ramp (ladder)	400	400	400	400	400	400
02167	Center ramp (wood filled)	630	630	630	630	630	630
	MISCELLANEOUS:						
02092	Factory installation of electric brake control	230	230	230	230	230	230
06310	5,000 lb. park stand	0	0	0	0	0	0
06424	12,000 lb H.D. drop leg jack	130	130	130	130	130	130
07188	LED lights (utility)	150	150	150	150	150	150
06395	Out-of-jig charge	375	375	375	375	375	375
	PAINT: See Trail King Color Chart						



*Trail King doesn't recommend ordering trailers equipped with surge brakes, due to the interpretation of the Federal Motor Vehicle Law Section 393.48. This states that brakes must be in operation at all times. Surge brakes do not conform to these requirements.

TRAIL KING CONSTRUCTION DIVISION

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING ADDITIONAL DECK LENGTHS

MODEL	ITEM #	PRICE PER FOOT	LIMIT
TK6U	06757	\$215	4'
TK8U	06758	\$220	4'
TK10U	06759	\$230	4'
TK12U	06760	\$235	4'
TK18U	06761	\$260	4'
TK12	06762	\$270	4'
TK12+6	06763	\$320	4'
*TK18	06764	\$320	6'
*TK20	06765	\$340	6'
*TK24	06766	\$350	6'
*TK32	06767	\$365	6'
*TK40 & *TK40LP	06768	\$380	6'
TK42LP	06769	\$380	6'
TK50	06770	\$420	6'
TK50RG	06771	\$480	5'
TK70RG	06772	\$515	5'
TK80RG	06773	\$685	5'
TK110RG	06774	\$765	5'
TK70HT	06775	\$570	5'
TK110HT	06776	\$660	5'
TK70SA	06777	\$700	5'
TK110SA	06778	\$830	5'
TK70HDG	06779	\$700	5'
TK80HDG	06780	\$745	5'
TK110HDG	06781	\$830	5'
TK120HDG	06782	\$855	5'
TK150HDG	06783	\$950	5'
TK170HDG	06784	\$950	5'
TK200HDG	06785	\$1,135	5'
TK70ES or TK70ED	06786	\$835	5'
TK90ES or TK90ED	06787	\$930	5'
TKLCS	06788	\$515	5'
TKCD	06789	\$685	5'

*Tags over a 26' deck must add out-of-jig charge

Same prices for equivalent Tilt Bed capacity (no out-of-jig required.)



TRAIL KING INDUSTRIES

ALL RIGHTS RESERVED. ©TRAIL KING INDUSTRIES, INC., 2008

TRAIL KING RIMS, HUBS, AND SPECIAL WHEEL COMBINATIONS

RIMS			
ITEM #	MODEL	TIRE SIZE	PRICE
	STANDARD		
01051	TK6U, TK8U, TK10U	6 x 15 Disc wheel (spare)	65
01053	TK12U thru TK24	6 x 16 Disc wheel (spare)	110
06431		6.75 x 17.5 8 Hole Disc wheel (spare)	190
01063		8.25 x 22.5 10 Hole Disc wheel (spare)	140
01064		8.25 x 24.5 10 Hole Disc wheel (spare)	140

ITEM #	HUBS	PER AXLE
05241	8.25 X 22.5 outboard cast drum (per axle)	260
05246	8.25 x 22.5 outboard hubs (per axle)	315
05252	Outboard centrifuse drum (per axle)	255

ITEM #	SPECIAL WHEEL COMBINATIONS	PER AXLE
--------	----------------------------	----------

Must have disc wheels and outboard drums. Price includes outboard and centrifuse options when applicable.		
05243	8.25 x 22.5 outboard hubs (per axle)	315
05080	Aluminum machined wheels (22.5 or 24.5)(ea.)	375
06371	6.75 x 17.5 mach aluminum wheels (Alcoa) (ea.)	220
05051	Polished wheels (per wheel)	95
05258	T.P. axles (same inner & outer bearings)(avail. for 16	285
05044	Aluminum hubs (per axle)	255
06731	Cat's Eye Tire Equalization System (per axle)	220
06732	Dual Dynamics Tire Equalization System (per axle)	220
06733	PSI Tire Inflation System for single axle	1,195
07808	PSI Tire Inflation System for tandem axles	1,375
07809	PSI Tire Inflation System for tri-axles	1,725

