EQUIPMENT

CREATING A CLEANER, SAFER, HEALTHIER WORLD.

T5

WALK-BEHIND FLOOR SCRUBBER

- Increase safety with NFSI-certified ec-H2O™ cleaning technology or FaST® Foam Scrubbing Technology
- Quietly clean with an OSHA-recognized test-standard 67 dBA
- Achieve complete solution recovery – even on 180 degree turns – with superior squeegee design

REACH A HIGHER LEVEL OF CLEANLINESS, HEALTH, AND SAFETY WITH THE NEW, ENVIRONMENTALLY FRIENDLY T5.

REDUCE DEPENDENCY ON CLEANING CHEMICALS
Scrub chemical-free with ec-H2O™ cleaning technology.

DECREASE NOISE LEVELS
Quietly scrub noise-sensitive environments with the T5's OSHA-recognized 67 dBA.

THE SAFEST WAY TO CLEAN
Increase safety and cleanliness with chemical-free ec-H2O technology or FaST® Foam Scrubbing Technology. The T5 uses up to 70% less water with both technologies. ec-H2O uses no detergent. FaST uses up to 90% less detergent than traditional scrubbers.

MOVE FROM CLEANLINESS TO SANITIZATION
Reduce scrubber mold and bacteria to ensure the highest level of cleanliness with complete-access Hygenic® tanks.

HIGH PRODUCTIVITY WITH GEL BATTERIES
Achieve up to 4.5 hours of run-time with environmentally preferable sealed batteries.

MAXIMIZE FLEXIBILITY AND VERSATILITY
Choose from 24, 28, 32 in / 600, 700, 800 mm disk or 26, 32 in / 650, 800 mm cylindrical brushes for scrubbing a variety of spaces and applications.

CONSISTENT CLEANING RESULTS
Lock-in consistent, repeatable cleaning results with exclusive QA Controls™ system.

INSIDE THE

T5

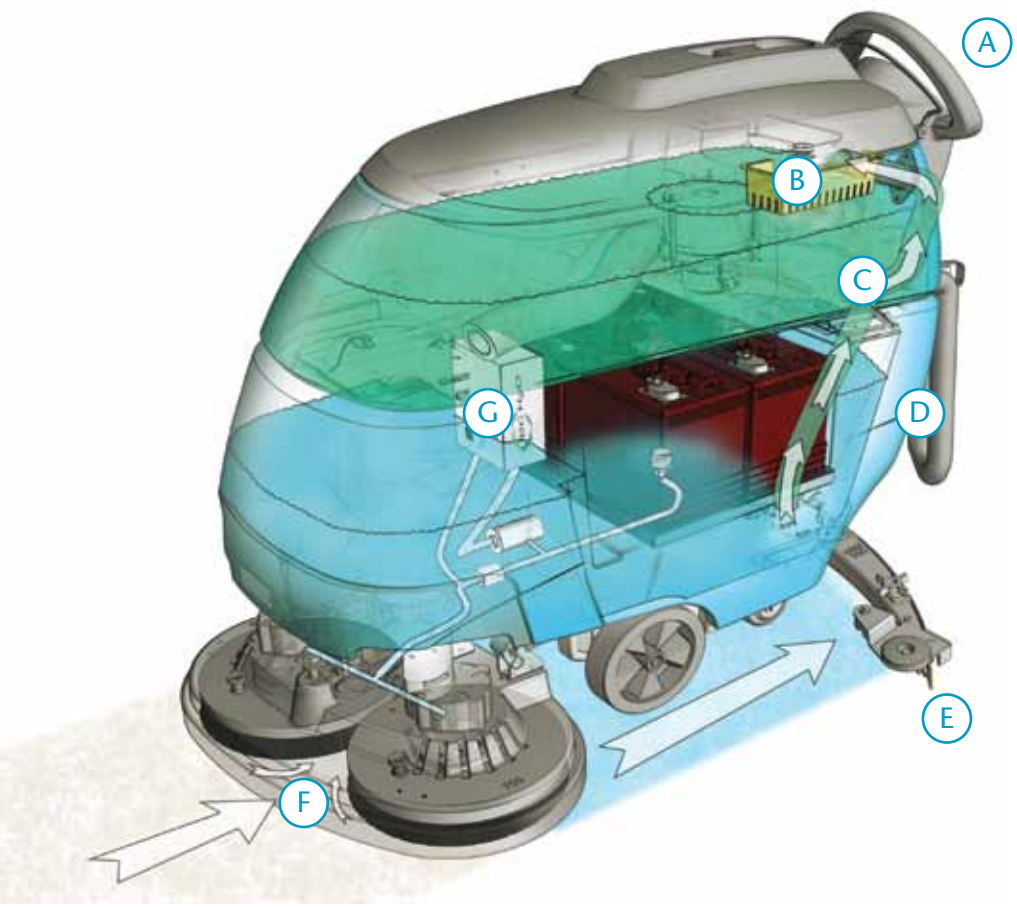

EXCLUSIVE TECHNOLOGIES

(optional cleaning innovations)

All technologies increase scrub time up to three times using a single tank of water.

ec-H2O™ technology electrically converts water into an innovative cleaning solution that cleans effectively, saves money, improves safety, and reduces environmental impact compared to daily cleaning floor chemicals and methods.

FaST® Foam Scrubbing Technology uses up to 70% less water and 90% less chemicals to improve floor traction as certified by NFSI, helping reduce the risk of slip and fall accidents.

A Easily train new operators to use the simple, intuitive controls.

B Reduce operator contact with wastewater and prevent clogged hoses/drains with the convenient debris tray.

C Solution and recovery tanks easily cleanable. Exclusive Hygenic® tanks are fully accessible for sanitization.

D Save time and storage space with the on-board charger.

E Quickly remove and replace brushes and squeegees. Plus, with the "no hassle" squeegee system, there are no tools for maintenance and the blade is factory set at the optimum recovery angle.

F Eliminate the need for follow-up passes and mop-ups with the fully self-adjusting splash skirt that captures 100% of scrub deck overspray.

G Scrub longer on a single tank with Green Seal certified FaST® Foam Scrubbing Technology or ec-H2O™ technology.

ENVIRONMENTAL STEWARDSHIP

ec-H2O™ and FaST® technologies are NFSI (National Floor Safety Institute) Certified. NFSI certified products must pass a 2-phase wet slip resistance process and have been shown to reduce the potential for slip-and-fall accidents.

ec-H2O and FaST technologies are registered by NSF International. NSF International is an independent, not-for-profit organization that ensures formulation and labels on these products meet appropriate food safety regulations.

ec-H2O and FaST technologies may contribute to LEED or LEED-EBOM (Existing Building: Operations & Maintenance) points, provided other appropriate criteria are met. For more information on obtaining LEED points, please contact your sales rep or refer to the USGBC website at: www.usgbc.org.

FaST is a Green Seal (GS-37) Certified Detergent. Green Seal evaluates and certifies cleaning products based on criteria such as the toxicity of the product, skin and eye irritation, skin sensitization, combustibility, toxicity to aquatic life, and packaging.

Conserve Resources | Reduce Detergents | Increase Safety | Improve Air Quality | Reduce Noise

Choose GE Capital, U.S. Bancorp, or All-Line Leasing for simple, quick financing with flexible upgrade options.

T5 WALK-BEHIND FLOOR SCRUBBER

SCRUBBING SYSTEM	DISK	CYLINDRICAL
Cleaning path	24 in / 600 mm 28 in / 700 mm 32 in / 800 mm	26 in / 650 mm 32 in / 800 mm
Productivity (per hour)		
Theoretical max	(24 in) 26,400 ft² / 2,500 m² (28 in) 30,800 ft² / 2,900 m² (32 in) 35,200 ft² / 3,300 m²	(26 in) 28,600 ft² / 2,700 m² (32 in) 35,200 ft² / 3,300 m²
Estimated actual* (conventional)	(24 in) 17,875 ft² / 1,660 m² (28 in) 20,800 ft² / 1,900 m² (32 in) 24,000 ft² / 2,200 m²	(26 in) 19,200 ft² / 1,790 m² (32 in) 24,000 ft² / 2,200 m²
Estimated actual* (ec-H2O™ or FaST®)	(24 in) 20,075 ft² / 1,900 m² (28 in) 22,750 ft² / 2,100 m² (32 in) 26,250 ft² / 2,400 m²	(26 in) 21,000 ft² / 2,000 m² (32 in) 26,250 ft² / 2,400 m²

BRUSH DRIVE SYSTEM		
Brush motor horsepower	(2) 0.75 hp / 0.56 kW	(2) 0.63 hp / 0.47 kW
Brush RPM	220 rpm	1500 rpm
Brush/pad down pressure	(3 settings) 40, 80, 120 lb / 18, 36, 54 kg	

SOLUTION DELIVERY SYSTEM		
Solution tank capacity	22.5 gal / 85 L	22.5 gal / 85 L

RECOVERY SYSTEM	
Recovery tank capacity (includes demisting chamber)	27 gal / 102 L
Vacuum motor	0.85 hp / 0.64 kW, 3-stage
Waterlift	62 in / 1,570 mm

BATTERY SYSTEM	
System Voltage	24 V (4x 6V batteries), charger included
Standard run time**	6 V, 235 Ah / up to 5.5 hours
Optional sealed (AGM) run time**	6 V, 200 Ah / up to 4.5 hours

PROPELLING SYSTEM	
Propel speed (variable to)	
Transport	2.7 mph / 4.3 km/h
Scrubbing	2.5 mph / 4.0 km/h
Gradeability (ramp climb)	
Scrubbing/transporting (full)	3.0° / 5.0°
Trailer ramps (empty)	11°

MACHINE SPECIFICATIONS		
Product length	(24 in) 52.9 in / 1,340 mm (28 in) 55.7 in / 1,410 mm (32 in) 58.4 in / 1,480 mm	(26 in) 55.4 in / 1,410 mm (32 in) 55.4 in / 1,410 mm
Product width (scrub head)	(24 in) 25.4 in / 640 mm (28 in) 29 in / 740 mm (32 in) 33 in / 840 mm	(26 in) 28 in / 710 mm (32 in) 34 in / 860 mm
Squeegee width	(24 in) 35.7 in / 910 mm (28 in) 41.3 in / 1,050 mm (32 in) 46.6 in / 1,180 mm	(26 in) 41.3 in / 1,050 mm (32 in) 46.6 in / 1,180 mm
Product height	44 in / 1,120 mm	
Product weight (with batteries)	(24 in) 580 lb / 263 kg (28 in) 609 lb / 276 kg (32 in) 621 lb / 282 kg	(26 in) 621 lb / 282 kg (32 in) 629 lb / 285 kg
Sound level (operator's ear)***	68 dBA	

WARRANTY

See your local representative for warranty information

* Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.
** Run times are based on continuous scrubbing run times.
*** Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment manufacturers & OSHA.

Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information, call +1.800.553.8033 or email info@tennantco.com

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
Overseas: +1.763.540.1315

www.tennantco.com
info@tennantco.com

1.003.001.am.en T5 Brochure 5/12
©2012 The Tennant Company logo and other trademarks designated with the symbol "®" are trademarks of Tennant Company registered in the United States and/or other countries. Tennant Company's products are sold and serviced through subsidiaries of Tennant Company and distributors.