


Product Category	ITEM	FULL ITEM DESCRIPTION	Competitor Pricing	State Customer Price
Grade 1 Bored Locks & Latches	3-145-0001L	Grade 1 Cylindrical Lockset; F86 Storeroom Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$254.67	\$178.93
	3-145-0002L	Grade 1 Cylindrical Lockset; F86 Storeroom Function; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$254.67	\$178.93
	3-145-0003L	Grade 1 Cylindrical Lockset; F109 Entrance Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$264.05	\$191.71
	3-145-0004L	Grade 1 Cylindrical Lockset; F109 Entrance Function; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$264.05	\$191.71
	3-145-0005L	Grade 1 Cylindrical Lockset; F75 Passage Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset	\$189.01	\$124.55
	3-145-0006L	Grade 1 Cylindrical Lockset; F75 Passage Function; Boston Lever; 626 Finish; 2 3/4" Backset	\$189.01	\$124.55
	3-145-0007L	Grade 1 Cylindrical Lockset; F110 Classroom Intruder Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$307.49	\$245.12
	3-145-0008L	Grade 1 Cylindrical Lockset; F110 Classroom Intruder Function; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$307.49	\$245.12
	3-145-0009L	Grade 1 Cylindrical Lockset; F110 Classroom Intruder Function with LED indicator; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	N/A	\$229.49
	3-145-0010L	Grade 1 Cylindrical Lockset; F110 Classroom Intruder Function with LED indicator; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	N/A	\$229.49
	3-145-0011L	Grade 1 Cylindrical Lockset; F84 Classroom Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$254.67	\$178.93
	3-145-0012L	Grade 1 Cylindrical Lockset; F84 Classroom Function; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$264.05	\$178.93
	3-145-0013L	Grade 1 Cylindrical Lockset; F76 Privacy Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset	\$203.61	\$158.14
	3-145-0014L	Grade 1 Cylindrical Lockset; F76 Privacy Function; Boston Lever; 626 Finish; 2 3/4" Backset	\$218.91	\$158.14
	3-145-0015L	Grade 1 Cylindrical Lockset; F82 Entry Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$254.67	\$191.71
	3-145-0016L	Grade 1 Cylindrical Lockset; F82 Entry Function; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$254.67	\$191.71
Grade 2 Bored Locks & Latches	3-145-0017L	Grade2 Cylindrical Lockset; F86 Storeroom Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$137.10	\$92.64
	3-145-0018L	Grade2 Cylindrical Lockset; F86 Storeroom Function; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$137.10	\$92.64
	3-145-0019L	Grade2 Cylindrical Lockset; F109 Entrance Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$137.10	\$92.64
	3-145-0020L	Grade2 Cylindrical Lockset; F109 Entrance Function; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$137.10	\$92.64
	3-145-0021L	Grade2 Cylindrical Lockset; F75 Passage Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset	\$100.99	\$69.24
	3-145-0022L	Grade2 Cylindrical Lockset; F75 Passage Function; Boston Lever; 626 Finish; 2 3/4" Backset	\$100.99	\$69.24
	3-145-0023L	Grade2 Cylindrical Lockset; F84 Classroom Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$137.10	\$74.11
	3-145-0024L	Grade2 Cylindrical Lockset; F84 Classroom Function; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$97.37	\$74.11
	3-145-0025L	Grade2 Cylindrical Lockset; F76 Privacy Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset	\$77.94	\$60.67
	3-145-0026L	Grade2 Cylindrical Lockset; F76 Privacy Function; Boston Lever; 626 Finish; 2 3/4" Backset	\$113.97	\$60.67
3-145-0027L	Grade2 Cylindrical Lockset; F82 Entry Function; Philadelphia Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$137.10	\$67.96	
3-145-0028L	Grade2 Cylindrical Lockset; F82 Entry Function; Boston Lever; 626 Finish; 2 3/4" Backset; ASA Strike; BEST* Format SFIC less core	\$93.69	\$67.96	
Grade 1 Mortise Locks & Latches (Operational & Security)	3-145-0029L	Grade 1 Mortise Lockset; F07 Storeroom Function; 630 Finish; Wide Escutcheon; Philadelphia lever; Curved Lip Strike; Less cylinder	\$414.69	\$273.71
	3-145-0030L	Grade 1 Mortise Lockset; F07 Function; 630 Finish; Wide Escutcheon; Dallas Lever; Curved Lip Strike; Less cylinder	\$414.69	\$273.71
	3-145-0031L	Grade 1 Mortise Lockset; F04 Entry Function; 630 Finish; Wide Escutcheon; Philadelphia lever; Curved Lip Strike; Less cylinder	\$461.13	\$273.71
	3-145-0032L	Grade 1 Mortise Lockset; F04 Function; 630 Finish; Wide Escutcheon; Dallas Lever; Curved Lip Strike; Less cylinder	\$472.84	\$273.71
	3-145-0033L	Grade 1 Mortise Lockset; F01 Passage Function; 630 Finish; Wide Escutcheon; Philadelphia lever; Curved Lip Strike	\$304.67	\$217.31
	3-145-0034L	Grade 1 Mortise Lockset; F01 Passage Function; 630 Finish; Wide Escutcheon; Dallas Lever; Curved Lip Strike	\$304.67	\$217.31
	3-145-0035L	Grade 1 Mortise Lockset; F13 Dormitory / Exit Function; 630 Finish; Wide Escutcheon; Philadelphia lever; Curved Lip Strike; Less cylinder	\$397.76	\$195.50
	3-145-0036L	Grade 1 Mortise Lockset; F13 Dormitory / Exit Function; 630 Finish; Wide Escutcheon; Dallas Lever; Curved Lip Strike; Less cylinder	\$397.76	\$195.50
	3-145-0037L	Grade 1 Mortise Lockset; F20 Apartment / Corridor Function; 630 Finish; Wide Escutcheon; Philadelphia lever; Curved Lip Strike; Less cylinder	\$486.21	\$274.53
	3-145-0038L	Grade 1 Mortise Lockset; F20 Apartment / Corridor Function; 630 Finish; Wide Escutcheon; Dallas Lever; Curved Lip Strike; Less cylinder	\$486.27	\$274.53
	3-145-0039L	Grade 1 Mortise Lockset; F19 Privacy w/Deadbolt Function; 630 Finish; Wide Escutcheon; Philadelphia lever; Curved Lip Strike	\$361.09	\$260.24
3-145-0040L	Grade 1 Mortise Lockset; F19 Privacy w/Deadbolt Function; 630 Finish; Wide Escutcheon; Dallas Lever; Curved Lip Strike	\$361.09	\$260.24	
3-145-0041L	Grade 1 Mortise Lockset; F22 Privacy Function; 630 Finish; Wide Escutcheon; Philadelphia lever; Curved Lip Strike	\$350.37	\$223.47	
3-145-0042L	Grade 1 Mortise Lockset; F22 Privacy Function; 630 Finish; Wide Escutcheon; Dallas Lever; Curved Lip Strike	\$350.37	\$223.47	
Grade 1 Door closers	3-145-0043L	Institutional grade 1 door closer; Size 1-6; Tri-pack for regular, top jamb, and parallel arm; SNB included; Sprayed aluminum finish; non handed.	\$343.35	\$156.04
	3-145-0044L	Institutional grade 1 door closer; Size 1-6; Hold open arm; Tri-pack for regular, top jamb, and parallel arm; SNB included; Sprayed aluminum finish; non handed.	\$483.75	\$189.64
	3-145-0045L	Institutional grade 1 door closer; Size 1-6; Door saver / Extra duty arm; SNB included; Sprayed aluminum finish; non handed.	\$448.43	\$202.60
	3-145-0046L	Institutional grade 1 door closer; Size 1-6; Door saver hold open; SNB included; Sprayed aluminum finish; non handed.	\$522.45	\$205.84
	3-145-0047L	Institutional grade 1 door closer; Size 1-6; Spring cushion stop; SNB included; Sprayed aluminum finish; non handed.	\$517.95	\$250.90
	3-145-0048L	Institutional grade 1 door closer; Size 1-6; Delayed action; Tri-pack for regular, top jamb, and parallel arm; SNB included; Sprayed aluminum finish; non handed.	\$327.60	\$154.45
	3-145-0049L	Institutional grade 1 door closer; Size 1-6; Delayed action; Door saver / Extra duty arm; Parallel arm only; SNB included; Sprayed aluminum finish; non handed.	\$338.40	\$217.18
	3-145-0050L	Commercial grade 1 door closer; Size 1-6; Tri-pack for regular, top jamb, and parallel arm; SNB included; Sprayed aluminum finish; non handed.	\$163.53	\$134.53
	3-145-0051L	Commercial grade 1 door closer; Size 1-6; Hold open arm; Tri-pack for regular, top jamb, and parallel arm; SNB included; Sprayed aluminum finish; non handed.	\$195.75	\$147.29
	3-145-0052L	Commercial grade 1 door closer; Size 1-6; Door saver / Extra duty arm; Parallel arm only; SNB included; Sprayed aluminum finish; non handed.	\$234.71	\$157.51
	3-145-0053L	Commercial grade 1 door closer; Size 1-6; Door saver hold open; Parallel arm only; SNB included; Sprayed aluminum finish; non handed.	\$310.05	\$205.93
	3-145-0054L	Commercial grade 1 door closer; Size 1-6; Spring cushion stop; Parallel arm only; SNB included; Sprayed aluminum finish; non handed.	\$319.34	\$255.27
	3-145-0055L	Economical grade 1 door closer; Size 1-4; Tri-pack for regular, top jamb, and parallel arm; SNB included; Sprayed aluminum finish; non handed.	\$97.04	\$76.35
	3-145-0056L	Economical grade 1 door closer; Size 1-4; Hold open arm; Tri-pack for regular, top jamb, and parallel arm; SNB included; Sprayed aluminum finish; non handed.	\$115.09	\$101.84
3-145-0057L	Economical grade 1 door closer; Size 1-4; Door saver / Extra duty arm; SNB included; Sprayed aluminum finish; non handed.	\$277.43	\$124.49	
3-145-0058L	Economical grade 1 door closer; Size 1-4; Door saver hold open; SNB included; Sprayed aluminum finish; non handed.	\$296.55	\$118.33	
3-145-0059L	Economical grade 1 door closer; Size 1-4; Spring cushion stop; SNB included; Sprayed aluminum finish; non handed.	\$246.60	\$142.08	
Grade 1 Exit Device	3-145-0060L	Grade 1 rim exit device; UL panic listed; hex key dogging; 3'0" door; SNB included; 630 finish	\$715.97	\$497.31
	3-145-0061L	Grade 1 rim exit device; UL panic listed; cylinder dogging; 3'0" door; SNB included; 630 finish	\$758.29	\$511.66
	3-145-0062L	Grade 1 rim exit device; UL fire listed; no dogging; 3'0" door; SNB included; 630 finish	\$823.16	\$562.05
	3-145-0063L	Grade 1 rim exit device; UL panic listed; hex key dogging; 4'0" door; SNB included; 630 finish	\$758.29	\$527.55
	3-145-0064L	Grade 1 rim exit device; UL panic listed; cylinder dogging; 4'0" door; SNB included; 630 finish	\$758.29	\$560.34
	3-145-0065L	Grade 1 rim exit device; UL fire listed; no dogging; 4'0" door; SNB included; 630 finish	\$823.16	\$591.81
	3-145-0066L	Grade 1 surface vertical rod exit device; UL panic listed; hex key dogging; 3'0" door; SNB included; 630 finish	\$998.63	\$694.35
	3-145-0067L	Grade 1 surface vertical rod exit device; UL panic listed; cylinder dogging; 3'0" door; SNB included; 630 finish	\$1,040.95	\$687.28
	3-145-0068L	Grade 1 surface vertical rod exit device; UL fire listed, no dogging; 3'0" door; SNB included; 630 finish	\$1,105.82	\$737.82
	3-145-0069L	Grade 1 surface vertical rod exit device; UL listed, no dogging; 4'0" door; SNB included; 630 finish	\$1,016.68	\$728.37
	3-145-0070L	Grade 1 surface vertical rod exit device; UL listed, cylinder dogging; 4'0" door; SNB included; 630 finish	\$1,040.95	\$753.41
3-145-0071L	Grade 1 vertical exit device; UL fire listed; no dogging; 4'0" door; SNB included; 630 finish	\$1,105.82	\$770.89	

# GT SERIES GRADE 1 CYLINDRICAL LOCK


## PERFORMANCE, MECHANICAL

## SPECIFICATIONS


FOR DOORS:  
 APPLICATION:  
 BACKSET:  
 CHASSIS:  
 FRONT:  
 STRIKE:  
 TORQUE RESISTANCE:  
 LATCHBOLT:  
 HAND:  
 TRIM:  
 LEVER HOUSING LESS  
 INTERCHANGEABLE CORE:  
 INTERCHANGEABLE CORE:  
 KEYING AND KEYWAYS:  
 KEYS:  
 FINISHES:  
 CERTIFICATIONS, LISTINGS  
 COMPLIANCES:  
 WARRANTY:  
 COUNTRY OF ORIGIN:

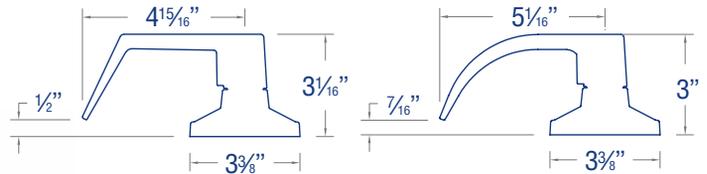

**GT SERIES**



PHILADELPHIA (PHL) LEVER



BOSTON (BSN) LEVER

- Factory tested to over 3 million cycles (3 times the ANSI/BHMA Grade 1 std)
- Lever torque tested to 2,100 in-lbs (3 times the ANSI/BHMA Grade 1 std)

- 1-3/4" to 2-1/4" thick
- Through door thru-bolting
- 2-3/4" standard.
- Heavy duty zinc diecast, investment cast, chromated cold rolled steel, stainless steel and Acuzinc® mechanism. Heavy duty steel spindles for locking functions
- 2-1/4" x 1-1/8" • Stainless Steel
- Beveled 1/8" on 2"
- ASA standard • Stainless Steel
- **Exceeds 2100 in. lbs.**
- 9/16" Latch projection with deadlatching.
- Non-handed
- Solid Zinc diecast PHL, BSN • 41° Lever Rotation
- Wrought Brass Roses Concealed Screws
- Option SFL - BEST® Small Format Compatible
- Option LFL - Schlage® Large Format Compatible (Available with PHL lever only)
- Small and large format interchangeable cores sold separately. Contact agency.
- Included when interchangeable core is specified/ordered. Most keyways available including Schlage C and Best A. Contact agency.
- Two (2) per Lock
- 626 (US26D) Satin Chrome
- UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0"
- Certified to ANSI/BHMA A156.2-2011, Grade 1
- **Windstorm Rated** - Florida Building Code listed FL3262, ANSI A250.13, ASTM E1886, ASTM E330, Outswing: 350 ft-lbs., Inswing: N/R, Design Load Rating: 1485 lbf.
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- Twenty-five (25) year Limited Warranty
- Proudly assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.

## SCHOOL SECURITY SOLUTIONS

PDQ's Patented (US Patent #9,187,928) GT 135 LED Classroom Intruder Cylindrical Lock is designed to allow a staff member to use the inside cylinder to lock the outside of the door, without compromising safety to the occupants in the room. But how does a staff member know if the outside lever is locked? Until now, it required opening the door and checking the lever. PDQ's 135 LED Classroom Intruder function eliminates the need to open the door. Simply press the button on the lock, and...if the Red LED lights up, the outside lever is locked and secure. If the Red LED does not light up, this indicates the outside lever is not locked and secure.



OUTSIDE LEVER UNLOCKED



TO CHECK THE SECURITY OF THE OUTSIDE LEVER, PRESS THE BUTTON. IF THE RED LED LIGHTS UP, THAT CONFIRMS THE OUTSIDE LEVER IS LOCKED AND SECURE.

### FEATURES

- Complies with California Education Code (Functions GT135, GT135LED)
- Red LED (Light Emitting Diode) outside lever status indicator.
- Pushing the button located on the rose of the inside lock, Red LED illuminates indicating the outside lever is locked.
- Offered with cylinder housings compatible with Best® Small Format Inter-changeable cores, Schlage® Large Format I (Full Size) interchangeable cores and most others.
- **Large Format Inter-changeable cores only available with PHL lever.**
- Keying options available, compatible with most key systems.
- Battery life rating: 10 years\*
- Battery type: CR1220 (included)
- Patented (US Patent #9,187,928)

### PERFORMANCE, MECHANICAL

- Factory tested to over 2 million cycles (2 times the ANSI/BHMA Grade 1 std)
- Lever torque tested to 2,100 in-lbs (3 times the ANSI/BHMA Grade 1 std)

\*Battery tested to over 7,300 illumination cycles. 10 year life rating is calculated using 1 sec per illumination @ 2 illuminations per day @ 365 days per year @ 10 years

## CROSS REFERENCE








ANSI # / FUNCTION	PDQ	BEST	CORBIN	DORMA	SARGENT	SCHLAGE	YALE
F86 STORE ROOM	GT 115	D	CL3357	C880	10G04	ND80PD	4705LN
F109 ENTRANCE	GT 116	AB	CL3351	C850	10G05	ND53PD	4704LN
F75 PASSAGE	GT 126	N	CL3310	C810	10U15	ND10S	4701LN
F110 INTRUDER CLASSROOM	GT 135	IN	CL3352	C877	10G38	ND95PD	4718LN
F110 INTRUDER CLASSROOM W/LED INDICATOR	GT 135 LED PDQ Exclusive	N/A	N/A	N/A	N/A	N/A	N/A
F84 CLASSROOM	GT 148	R	CL3355	C870	10G37	ND70PD	4708LN
F76 PRIVACY	GT 176	L	CL3320	C840	10U65	ND40S	4702LN
F92 ENTRY	GT 182	93K A	CL3361	C850	10G24	ND50PD	5404LN

## PDQ MODEL NUMBER DESCRIPTION GUIDE

SERIES	FUNCTION*	TRIM	FINISH	BACKSET	STRIKE	LEVER HOUSING
GT	115	PHL	626	234	ASA	SFL
		PHL — PHILADELPHIA (Default) BSN — BOSTON				SFL — SFIC Housing less core LFL — Schlage® Compatible LFC Housing less core (Available with PHL lever only)

\*See function table above  
Case quantity: 6  
Case weights: 31 lbs. for Non-Keypad Functions  
33 lbs. for Keypad Functions

# LOCK FUNCTIONS

FUNCTION	FUNCTION NUMBER	INSIDE   OUTSIDE	DESCRIPTION	ANSI NUMBER
<b>NON KEYED</b>				
Storeroom	GT115		<ul style="list-style-type: none"> <li>Latchbolt operated by inside lever or key in outside lever</li> <li>Outside lever always fixed</li> </ul>	F86
Entrance	GT116		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side or key in outside lever</li> <li>Outside lever locked by push/turn button on inside</li> <li>When outside lever is locked by push button on inside – key from outside, or rotating inside lever unlocks outside lever</li> <li>When outside lever is locked by pushing and turning button on the inside, key from outside or rotating inside lever retracts latch but does not unlock outside lever</li> </ul>	F109
Passage / Closet	GT126™		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side at all times</li> </ul>	F75
Classroom Intruder	GT135		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> <li>Key in either lever locks outside lever</li> <li>Key in either lever unlocks outside lever</li> <li>Inside lever always free</li> </ul>	F110
	GT135LED		<ul style="list-style-type: none"> <li>Red LED Outside Lever Status Indicator</li> <li>Lock Directional Arrow</li> <li><b>Patent #9,187,928</b></li> </ul>	
Classroom	GT148		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> <li>Outside lever locked by key from outside</li> <li>Outside lever unlocked by key from outside</li> <li>Inside lever always operates latch</li> </ul>	F84
Privacy Bedroom / Bathroom	GT176™		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side or emergency release in outside lever</li> <li>Outside lever locked by push button on inside</li> <li>Outside lever unlocked by emergency release from outside, rotating inside lever, or closing door</li> </ul>	F76
Entry	GT182		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side or key in outside lever</li> <li>Outside lever locked by push button on inside</li> <li>Outside lever unlocked by key from outside</li> </ul>	F82



## HOW TO ORDER

PDQ MODEL NUMBER	CABVI NUMBER	CABVI NUMBER	PDQ MODEL NUMBER
GT 115 BSN 626 234 ASA SFL	3-145-0002L	3-145-0001L	GT 115 PHL 626 234 ASA SFL
GT 115 PHL 626 234 ASA SFL	3-145-0001L	3-145-0002L	GT 115 BSN 626 234 ASA SFL
GT 116 BSN 626 234 ASA SFL	3-145-0004L	3-145-0003L	GT 116 PHL 626 234 ASA SFL
GT 116 PHL 626 234 ASA SFL	3-145-0003L	3-145-0004L	GT 116 BSN 626 234 ASA SFL
GT 126 BSN 626 234 ASA	3-145-0006L	3-145-0005L	GT 126 PHL 626 234 ASA
GT 126 PHL 626 234 ASA	3-145-0005L	3-145-0006L	GT 126 BSN 626 234 ASA
GT 135 BSN 626 234 ASA SFL	3-145-0008L	3-145-0007L	GT 135 PHL 626 234 ASA SFL
GT 135 PHL 626 234 ASA SFL	3-145-0007L	3-145-0008L	GT 135 BSN 626 234 ASA SFL
GT 135LED BSN 626 234 ASA SFL	3-145-0010L	3-145-0009L	GT 135LED PHL 626 234 ASA SFL
GT 135LED PHL 626 234 ASA SFL	3-145-0009L	3-145-0010L	GT 135LED BSN 626 234 ASA SFL
GT 148 BSN 626 234 ASA SFL	3-145-0012L	3-145-0011L	GT 148 PHL 626 234 ASA SFL
GT 148 PHL 626 234 ASA SFL	3-145-0011L	3-145-0012L	GT 148 BSN 626 234 ASA SFL
GT 176 BSN 626 234 ASA	3-145-0014L	3-145-0013L	GT 176 PHL 626 234 ASA
GT 176 PHL 626 234 ASA	3-145-0013L	3-145-0014L	GT 176 BSN 626 234 ASA
GT 182 BSN 626 234 ASA SFL	3-145-0016L	3-145-0015L	GT 182 PHL 626 234 ASA SFL
GT 182 PHL 626 234 ASA SFL	3-145-0015L	3-145-0016L	GT 182 BSN 626 234 ASA SFL

**ORDERING EXAMPLE: 3-145-0002L**

Notes



**PDQ Manufacturing**  
 2754 Creek Hill Road,  
 Leola, PA 17540

**Technical Service: 800-441-9692**  
[www.pdqlocks.com](http://www.pdqlocks.com)



**Customer Service: 513-497-4501**  
[Customer.service@cincyblind.org](mailto:Customer.service@cincyblind.org)  
[www.cincyblind.org](http://www.cincyblind.org)

# GP SERIES GRADE 2 CYLINDRICAL LOCK

## SPECIFICATIONS

**FOR DOORS:**  
**APPLICATION:**  
**BACKSET:**  
**CHASSIS:**

**FRONT:**

**STRIKE:**

**TORQUE RESISTANCE:**

**LATCHBOLT:**

**HAND:**

**TRIM:**

**LEVER HOUSING LESS  
INTERCHANGEABLE CORE:**

**INTERCHANGEABLE CORE:  
KEYING AND KEYWAYS:**

**KEYS:**

**FINISHES:**

**CERTIFICATIONS, LISTINGS  
COMPLIANCES:**

**WARRANTY:**

**COUNTRY OF ORIGIN:**





**GP SERIES**

- 1-3/4" to 2-1/4" thick
- Preset for 1-3/4" door
- Through door thru-bolting
- Fits standard 161 Door prep
- 2-3/4" standard.
- Heavy duty zinc diecast, investment cast, chromated cold rolled steel, stainless steel and EZAC™ mechanism.


- 2-1/4" x 1-1/8"
- Stainless Steel
- Beveled 1/8" on 2"
- ASA standard
- Stainless Steel
- **Exceeds 1600 in. lbs.**
- 1/2" Throw Deadlocking.
- Non-handed
- Solid Zinc diecast PHL, BSN
- 65° Lever Rotation
- Wrought Brass Roses - Concealed screws

- Option SFL - BEST® Small Format Compatible
- Option LFL - Schlage® Large Format Compatible (Available with PHL lever only)
- Small and large format interchangeable cores sold separately. Contact agency.
- Included when interchangeable core is specified/ordered. Most keyways available including Schlage C and Best A. Contact agency.
- Keys: - Two (2) per lock.
- 626 (US26D) Satin Chrome

- UL/CUL 10C listed for 3 hrs, for single doors up to 40" x 80"
- Certified to ANSI/BHMA A156.2-2011, Grade 1
- **Windstorm Rated** - Florida Building Code listed FL3262, ANSI A250.13, ASTM E1886, ASTM E330, Outswing: 350 ft-lbs., Inswing: N/R, Design Load Rating: 1485 lbf.
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- Eight (8) year Limited Warranty
- Proudly assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.

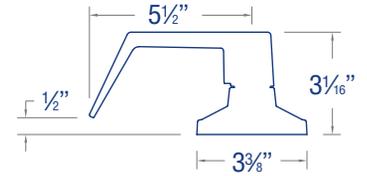

**PHILADELPHIA (PHL) LEVER**





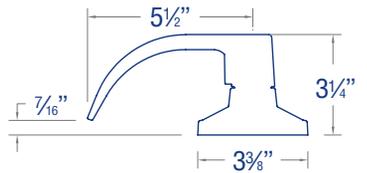


**BOSTON (BSN) LEVER**

## CROSS REFERENCE

ANSI # / FUNCTION	PDQ	BEST	CORBIN	DORMA	SARGENT	YALE
F86 STORE ROOM	GP 115	D	CL3857	CL780	7G04	5305LN
F109 ENTRANCE	GP 116	AB	CL3851	CL753	7G05	5307LN
F75 PASSAGE	GP 126	N	CL3810	CL710	7U15	5301LN
F84 CLASSROOM	GP 148	R	CL3855	CL770	7G37	5308LN
F76 PRIVACY	GP 176	L	CL3820	CL740	7U65	5303LN
F82 ENTRY	GP 182	NA	CL3861	CL750	NA	5302LN

# LOCK FUNCTIONS

FUNCTION	FUNCTION NUMBER	INSIDE   OUTSIDE	DESCRIPTION	ANSI NUMBER
<b>NON KEYED</b>				
Storeroom	GP115		<ul style="list-style-type: none"> <li>Latchbolt operated by inside lever or key in outside lever</li> <li>Outside lever always fixed</li> </ul>	F86
Entrance	GP116		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side or key in outside lever</li> <li>Outside lever locked by push/turn button on inside</li> <li>When outside lever is locked by push button on inside – key from outside, or rotating inside lever unlocks outside lever</li> <li>When outside lever is locked by pushing and turning button on the inside, key from outside or rotating inside lever retracts latch but does not unlock outside lever</li> </ul>	F109
Passage / Closet	GP126		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side at all times</li> </ul>	F75
Classroom	GP148		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> <li>Outside lever locked by key from outside</li> <li>Outside lever unlocked by key from outside</li> <li>Inside lever always operates latch</li> </ul>	F84
Privacy Bedroom / Bathroom	GP176		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side or emergency release in outside lever</li> <li>Outside lever locked by push button on inside</li> <li>Outside lever unlocked by emergency release from outside, rotating inside lever, or closing door</li> </ul>	F76
Entry	GP182		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side or key in outside lever</li> <li>Outside lever locked by push button on inside</li> <li>Outside lever unlocked by key from outside, and rotating inside lever</li> </ul>	F82

## PDQ MODEL NUMBER DESCRIPTION GUIDE

SERIES	FUNCTION*	TRIM	FINISH	BACKSET	STRIKE	LEVER HOUSING
GP	115	PHI	626	234	ASA	SFI
		<b>PHL</b> — PHILADELPHIA (Default) <b>BSN</b> — BOSTON			<b>SFL</b> — SFIC Housing less core <b>LFL</b> — Schalge® Compatible LFIC Housing less core (Available with PHL lever only)	

\*See function table above  
 Case quantity: 6  
 Case weights:  
 31 lbs. for Non-Keyed Functions  
 33 lbs. for Keyed Functions

# HOW TO ORDER

PDQ MODEL NUMBER	CABVI NUMBER	CABVI NUMBER	PDQ MODEL NUMBER
GP 115 BSN 626 234 ASA SFL	3-145-0018L	3-145-0017L	GP 115 PHL 626 234 ASA SFL
GP 115 PHL 626 234 ASA SFL	3-145-0017L	3-145-0018L	GP 115 BSN 626 234 ASA SFL
GP 116 BSN 626 234 ASA SFL	3-145-0020L	3-145-0019L	GP 116 PHL 626 234 ASA SFL
GP 116 PHL 626 234 ASA SFL	3-145-0019L	3-145-0020L	GP 116 BSN 626 234 ASA SFL
GP 126 BSN 626 234 ASA	3-145-0022L	3-145-0021L	GP 126 PHL 626 234 ASA
GP 126 PHL 626 234 ASA	3-145-0021L	3-145-0022L	GP 126 BSN 626 234 ASA
GP 148 BSN 626 234 ASA SFL	3-145-0024L	3-145-0023L	GP 148 PHL 626 234 ASA SFL
GP 148 PHL 626 234 ASA SFL	3-145-0023L	3-145-0024L	GP 148 BSN 626 234 ASA SFL
GP 176 BSN 626 234 ASA	3-145-0026L	3-145-0025L	GP 176 PHL 626 234 ASA
GP 176 PHL 626 234 ASA	3-145-0025L	3-145-0026L	GP 176 BSN 626 234 ASA
GP 182 BSN 626 234 ASA SFL	3-145-0028L	3-145-0027L	GP 182 PHL 626 234 ASA SFL
GP 182 PHL 626 234 ASA SFL	3-145-0027L	3-145-0028L	GP 182 BSN 626 234 ASA SFL

**ORDERING EXAMPLE: 3-145-0018L**

Notes



**PDQ Manufacturing**  
 2754 Creek Hill Road,  
 Leola, PA 17540  
 Technical Service: 800-441-9692  
 www.pdqlocks.com





**Customer Service: 513-497-4501**  
 Customer.service@cincyblind.org  
 www.cincyblind.org

# 3100 COMMERCIAL SERIES

DOOR CONTROL

## SPECIFICATIONS

**HANDING:**  
**OPERATION:**  
**BODY:**  
**ARM:**  
**ARM OPTIONS:**  
**FACTORY DEFAULT  
 SPRING SIZE, 1-4:**  
**PISTON:**  
**ADJUSTMENT:**  
**SIZE:**  
**MOUNTING:**  
  
**COVER:**  
**FINISHES:**  
**CERTIFICATIONS, LISTINGS  
 COMPLIANCES:**  
  
**WARRANTY:**

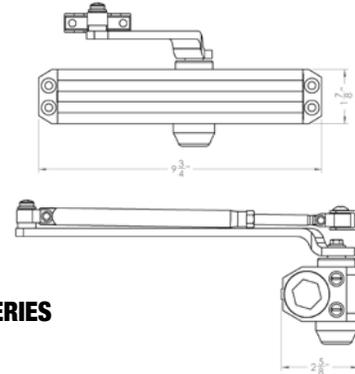

### 3100 SERIES

- Non-handed
- Rack and pinion design
- High strength aluminum alloy
- Round sty arm assembly
- Hold Open Arm
- Size 2
- Hardened Steel
- Adjustable controlled closing
- Separate hydraulic backcheck standard
- Adjustable  BF Plus 1 through 4
- Available to meet barrier free opening force requirements
- Common 9-1/16" x 3/4" mounting hole pattern retrofits Yale® 50, Norton® 1600 (for more comparisons, see cross reference table)
- Sex nuts and bolts standard
- Self drilling self tapping screws available
- Tri-packed for regular, top jamb and parallel arm installations
- Streamline plastic cover available. Contact agency.
- 689 – Aluminum
- UL and ULC listed
- UL 10C listed
- Certified to ANSI/BHMA A156.4-2006 Grade 1
- Meets requirements of the Buy American Act
- Twenty-Five (25) year limited warranty

## CROSS REFERENCE

MANUFACTURER	PDQ	CORBIN/ RUSSWIN®	DORMA	LCN®	NORTON/ YALE®	SARGENT®	STANLEY®
SERIES	3100	N/A	7400	1260	1600/50	1130	D-1650
MOUNTING HOLE PATTERN RETRO-FIT	YES	NO	NO	YES	YES	YES	YES



Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional hardware consultant.

# 5500 SERIES

## GRADE 1 DOOR CLOSER

### SPECIFICATIONS

**HANDING:**  
**OPERATION:**  
**BODY:**  
**ARM:**  
**ARM OPTIONS:**  
**PISTON:**  
**ADJUSTMENT:**  
**FACTORY DEFAULT**  
**SPRING SIZE:**  
**SIZE:**  
**MOUNTING:**  
  
**COVER:**  
**FINISHES:**  
**CERTIFICATIONS**  
**LISTINGS**  
**COMPLIANCES:**  
  
**WARRANTY:**



- Non-handed
- Rack and pinion design
- High strength aluminum alloy
- Flat style arm assembly
- Hold open arm • DS/DSHO heavy duty parallel stop arm • Spring Cushion Stop for DS/DSHO
- Hardened steel
- Adjustable controlled closing • Separate hydraulic backcheck standard
- Separate sweep, latch and backcheck intensity valves • Optional adjustable delayed action
- Size 3
- Adjustable  BARRIER FREE™ BF Plus 1 through 6
- Common 12" x 3/4" mounting hole pattern retrofits Norton 8300®, Yale 3300®, DORMA 8600 (for more comparisons, see cross reference table)
- Fasteners furnished for hollow metal, wood or aluminum doors and frames • Sex nuts and bolts standard
- Tri-packed for regular, top jamb and parallel arm installations
- Full plastic cover standard (non-handed)
- 689 – Aluminum
- UL228 listed
- ANSI/UL 10C listed for labeled swinging fire doors rated for up to and including 3 hours
- Certified to ANSI/BHMA A156.4-2006 Grade 1
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- Meets requirements of the Buy American Act
- Twenty-five (25) year limited warranty

## CROSS REFERENCE



MANUFACTURER	PDQ	CORBIN/ RUSSWIN®	DORMA	FALCON	LCN®	NORTON/ YALE®	SARGENT®	STANLEY®
SERIES	5500 Foot Pattern 12" X 3/4"	DC6200	8616FC	SC80FC	4010/4110 (Handed)	8501/3501	350	D-4550
MOUNTING HOLE PATTERN RETRO-FIT	YES	NO	YES	YES	NO	YES	NO	NO

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional hardware consultant.

# 7100 HEAVY DUTY GRADE 1 DOOR CLOSER

## SPECIFICATIONS

**HANDING:**  
**OPERATION:**  
**BODY:**  
**ARM:**  
**ARM OPTIONS:**  
**PISTON:**  
**ADJUSTMENT:**  
  
**ADJUSTMENT VALVES:**  
**FACTORY DEFAULT  
SPRING SIZE:**  
**SIZE:**  
**MOUNTING:**  
  
**COVER:**  
**FINISHES:**  
**CERTIFICATIONS  
LISTINGS**  
**COMPLIANCES:**  
  
**WARRANTY:**

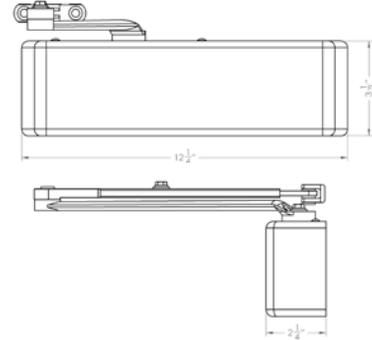

- Non-handed
- Rack and pinion design
- High strength cast iron
- Forged steel main arm • Flat style arm assembly
- Hold open arm • DS/DSHO heavy duty parallel stop arm • Spring Cushion Stop for DS/DSHO
- Hardened steel, 1-1/2" diameter
- Adjustable controlled closing • Separate hydraulic backcheck standard
- Separate sweep, latch and backcheck intensity valves • Optional adjustable delayed action
- All Adjustment Valves are STAKED
- Size 3
- Adjustable **BARRIER** BF Plus 1 through 6
- Mounting hole pattern retrofits LCN®4040 (for more comparisons, see cross reference table)
- Tri-packed for regular, top jamb and parallel arm installations
- Fasteners for metal and wood doors and frames • Sex nuts and bolts standard
- Full plastic cover standard (non-handed)
- 689 – Aluminum
- UL228 listed
- ANSI/UL 10C listed for labeled swinging fire doors rated for up to and including 3 hours
- Certified to ANSI/BHMA A156.4-2006 Grade 1
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- Meets requirements of the Buy American Act
- Twenty-five (25) year limited warranty

## CROSS REFERENCE

MANUFACTURER	PDQ	CORBIN/ RUSSWIN®	DORMA	LCN®	NORTON®	SARGENT®	YALE®
SERIES	7100	DC8000	8900	4040	7500	281	5800/4400
MOUNTING HOLE PATTERN RET- RO-FIT	YES	NO	NO	YES	NO	NO	NO

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional hardware consultant.

# ANSI FUNCTIONS TO PDQ MODELS AND CABVI NUMBERS

ANSI NUMBER	MOUNTING	PDQ MODEL	CABVI NUMBER	ANSI OPTIONAL SPECIFICATION FEATURES						
				PT-4A	PT-4C	PT-4D	PT-4E	PT-4F	PT-4G	PT-4H
C02011	HINGE SIDE	3101BCPA	3-145-0055L	X	X	X	X			X
		5101BCPA	3-145-0050L	X	X	X	X			X
		7101BCPA	3-145-0043L	X	X	X	X			X
		7141BCPA	3-145-0048L	X	X	X	X	X		X
C02021	PARALLEL	3101BCPA	3-145-0055L	X	X	X	X			X
		5101BCPA	3-145-0050L	X	X	X	X			X
		7101BCPA	3-145-0043L	X	X	X	X			X
		7141BCPA	3-145-0048L	X	X	X	X	X		X
		3101BCDS	3-145-0057L	X	X	X	X		X	X
		5101BCDS	3-145-0052L	X	X	X	X		X	X
		7101BCDS	3-145-0045L	X	X	X	X		X	X
		7141BCDS	3-145-0049L	X	X	X	X	X	X	X
C02041	TOP JAMB	3101BCPA	3-145-0055L	X	X	X	X			X
		5101BCPA	3-145-0050L	X	X	X	X			X
		7101BCPA	3-145-0043L	X	X	X	X			X
		7141BCPA	3-145-0048L	X	X	X	X	X		X
C02051	HINGE SIDE HOLD OPEN	3101BCHO	3-145-0056L	X	X	X	X			X
		5101BCHO	3-145-0051L	X	X	X	X			X
		7101BCHO	3-145-0044L	X	X	X	X			X
C02061	PARALLEL HOLD OPEN	3101BCHO	3-145-0056L	X	X	X	X			X
		5101BCHO	3-145-0051L	X	X	X	X			X
		7101BCHO	3-145-0044L	X	X	X	X			X
		3101BCDSHO	3-145-0058L	X	X	X	X		X	X
		5101BCDSHO	3-145-0053L	X	X	X	X		X	X
		7101BCDSHO	3-145-0046L	X	X	X	X		X	X
C02081	TOP JAMB HOLD OPEN	3101BCHO	3-145-0056L	X	X	X	X			X
		5101BCHO	3-145-0051L	X	X	X	X			X
		7101BCHO	3-145-0044L	X	X	X	X			X
C03011	HINGE SIDE	3101BCPA	3-145-0055L	X	X	X	X			X
		5101BCPA	3-145-0050L	X	X	X	X			X
C03021	PARALLEL	3101BCPA	3-145-0055L	X	X	X	X			X
		5101BCPA	3-145-0050L	X	X	X	X			X
		3101BCDS	3-145-0057L	X	X	X	X		X	X
		5101BCDS	3-145-0052L	X	X	X	X		X	X
C03041	TOP JAMB	3101BCPA	3-145-0055L	X	X	X	X			X
		5101BCPA	3-145-0050L	X	X	X	X			X
C03051	HINGE SIDE HOLD OPEN	3101BCHO	3-145-0056L	X	X	X	X			X
		5101BCHO	3-145-0051L	X	X	X	X			X
C03061	PARALLEL HOLD OPEN	3101BCHO	3-145-0056L	X	X	X	X			X
		5101BCHO	3-145-0051L	X	X	X	X			X
		3101BCDSHO	3-145-0058L	X	X	X	X		X	X
		5101BCDSHO	3-145-0053L	X	X	X	X		X	X
C03081	TOP JAMB HOLD OPEN	3101BCHO	3-145-0056L	X	X	X	X			X
		5101BCHO	3-145-0051L	X	X	X	X			X

## SPRING CUSHION STOPS



630 SATIN STAINLESS STEEL

PDQ's SCS Series Spring Cushion Stop helps reduce wear and tear on the opening. As the door begins moving through backcheck to its maximum opening angle, the stop acts as a shock absorber, dampening the impact forces.



NOTE: PLUNGER SHOWN IN RED TO ENHANCE THE CUSHIONING FEATURE.



STOP SHOWN BEFORE DOOR IS FULLY OPENED



STOP SHOWN WHEN DOOR IS FULLY OPENED

# HOW TO ORDER

PDQ MODEL NUMBER	CABVI NUMBER	CABVI NUMBER	PDQ MODEL NUMBER
3101 BC DS 689	3-145-0057L	3-145-0043L	7101 BC PA 689
3101 BC DS HO 689	3-145-0058L	3-145-0044L	7101 BC PA HO 689
3101 BC PA 689	3-145-0055L	3-145-0045L	7101 BC DS 689
3101 BC PA HO 689	3-145-0056L	3-145-0046L	7101 BC DS HO 689
3101 BC SCS 689	3-145-0059L	3-145-0047L	7101 BC SCS 689
5501 BC DS 689	3-145-0052L	3-145-0048L	7141 BC PA 689
5501 BC DS HO 689	3-145-0053L	3-145-0049L	7141 BC DS 689
5501 BC PA 689	3-145-0050L	3-145-0050L	5501 BC PA 689
5501 BC PA HO 689	3-145-0051L	3-145-0051L	5501 BC PA HO 689
5501 BC SCS 689	3-145-0054L	3-145-0052L	5501 BC DS 689
7101 BC DS 689	3-145-0045L	3-145-0053L	5501 BC DS HO 689
7101 BC DS HO 689	3-145-0046L	3-145-0054L	5501 BC SCS 689
7101 BC PA 689	3-145-0043L	3-145-0055L	3101 BC PA 689
7101 BC PA HO 689	3-145-0044L	3-145-0056L	3101 BC PA HO 689
7101 BC SCS 689	3-145-0047L	3-145-0057L	3101 BC DS 689
7141 BC DS 689	3-145-0049L	3-145-0058L	3101 BC DS HO 689
7141 BC PA 689	3-145-0048L	3-145-0059L	3101 BC SCS 689

**ORDERING EXAMPLE: 3-145-0057L**

## PDQ MODEL NUMBER DESCRIPTION GUIDE

SERIES	SIZE	APPLICATION
71 - 7100 Series 55 - 5500 Series 31 - 3100 Series	1 - Adjustable thru BF  Plus 1-6 (For 5500 and 7100 Series)  1 - Adjustable thru BF  Plus 1-4 (For 3100 Series)	DS – Door Saver Arm DSHO – Door Saver Hold Open Arm HO – Hold Open, Tri-Pack PA – Tri-Pack (standard) SCS – Spring Cushion Stop
<b>71</b> <b>0</b>	<b>1</b> <b>BC</b>	<b>PA</b> <b>689</b>
0 – Non-Delayed Action 4 – Delayed Action (In Addition To Backcheck)	BC – Adjustable Hydraulic Backcheck (Standard) Backcheck Positioning (Standard)	689 – Aluminum
<b>DELAYED ACTION</b>	<b>BACKCHECK</b>	<b>FINISH</b>

Notes



**PDQ Manufacturing**  
2754 Creek Hill Road,  
Leola, PA 17540

**Technical Service: 800-441-9692**  
[www.pdqlocks.com](http://www.pdqlocks.com)



**Customer Service: 513-497-4501**  
[Customer.service@cincyblind.org](mailto:Customer.service@cincyblind.org)  
[www.cincyblind.org](http://www.cincyblind.org)



# EXIT DEVICES 6200 SERIES

ARCHITECTURAL WIDE STILE

## RIM

### SPECIFICATIONS

**CHASSIS:**

**RAIL:**

**TOUCH PAD:**

**LATCH:**

**STRIKE/BACKSET:**

**PROJECTION:**

**HAND:**

**DOGGING:**

**MINIMUM STILE WIDTH:**

**DOOR THICKNESS:**

**DOOR WIDTH:**

**FINISHES:**


**FASTENERS:**

**MOUNTING HEIGHT:**

**CERTIFICATIONS, LISTINGS**

**COMPLIANCES:**

**WARRANTY:**

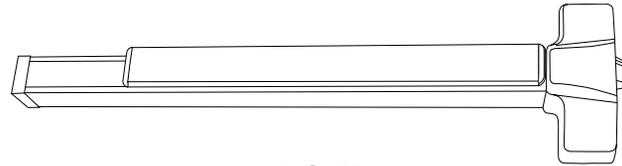

**RIM ANSI TYPE 1**

- Corrosion resistant plated steel
- Extruded aluminum
- Stainless steel
- Pullman with dead latching, stainless steel, 3/4" throw
- Supplied standard for 161 prep with 5/8" stop and door gap of 1/8"
- 3-1/16" (78mm) projection • 2-19/32" (66mm) projection when dogged
- Device is non-handed • Most trim is non-handed, all handed trim is field reversible
- Hex key dogging standard • Cylinder dogging optional
- No dogging on fire listed devices
- 4-1/4"
- 1-3/4" For other door thickness applications, contact PDQ Customer Service
- Supplied standard for 36" doors, "A" size units available, for maximum door width of 48"
- Consult Door Width Chart to determine correct device for your application
- 605 – Polished Brass, 606 – Satin Brass, 613 – Oil Rubbed Bronze, 626 – Satin Chrome, 630 – Satin Stainless Steel
- Optional \*Antimicrobial Coating available on 626 and 630 finishes only
- Device supplied with sex nuts, machine screws and wood screws
- Device centerline from finished floor: 40" (1016mm)
- UL/ULC 305 listed for "Panic", UL10C Listed for "Fire Exit Hardware" up to 3 hours for 4'0" x 8'0" maximum single, 8'0" x 8'0" maximum pairs
- Certified to ANSI/BHMA A156.3-2001 Grade 1
- **Windstorm Rated** - Florida Building Code listed FL16587, ANSI A250.13, ASTM E1996, Outswing: 350 ft-lbs., Inswing: N/R, Design Pressure: +70PSF/-70PSF Specify suffix "WS". Rim devices only.
- Meets requirements of the Buy American Act
- Ten (10) year limited warranty

## CROSS REFERENCE

DESCRIPTION	PDQ	CORBIN	DORMA	FALCON	HAGER	SARGENT	VON DUPRIN	YALE
RIM, HEX DOGGING	6200R	ED5200	9300	18-R	4501 RIM 0	8800	99-E0	7100
RIM, CYLINDER DOGGING	6201R	ED5200-M52	CD9300	CD-18-R	4501 RIM CD	16-8800	CD-99-E0	7105
RIM, FIRE LISTED	6200RF	ED5200A	F9300	F-18-R	4501 RIM FR	12-8800	99E0-F	7100F

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional Architectural Hardware Consultant.

# 6200 SERIES

## HEAVY DUTY GRADE 1 SURFACE VERTICAL ROD EXIT DEVICE

### SPECIFICATIONS

**CHASSIS:**

**RAIL:**

**TOUCH PAD:**

**LATCHES:**

**BACKSET:**

**PROJECTION:**

**HAND:**

**DOGGING:**

**MINIMUM STILE WIDTH:**

**DOOR THICKNESS:**

**DOOR WIDTH:**

**FINISHES:**

**FASTENERS:**


**MOUNTING HEIGHT:**

**VERTICAL RODS:**

**CERTIFICATIONS, LISTINGS**

**COMPLIANCES:**

**WARRANTY:**

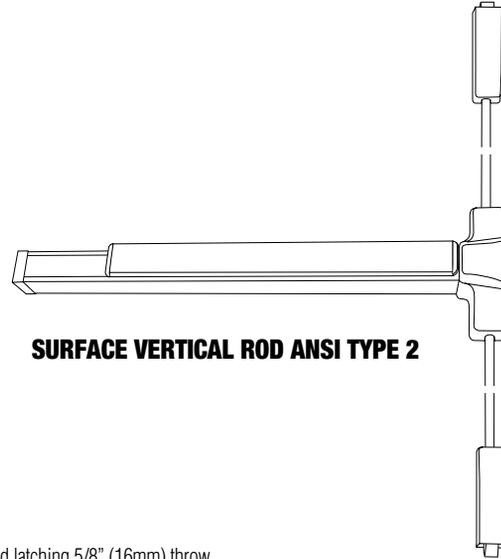

**SURFACE VERTICAL ROD ANSI TYPE 2**

- Corrosion resistant plated steel
- Extruded aluminum
- Stainless steel
- Top Latch — Pullman with dead latching 5/8" (16mm) throw
- Bottom Latch — Pullman with 5/8" (16mm) throw, held retracted during door swing
- 2-3/4" backset • Supplied standard for 161 prep with door gap of 1/8"
- 3-1/16" (78mm) projection • 2- 19/32" (66mm) projection when dogged
- Device is non-handed
- Hex key dogging standard
- No dogging on fire listed devices
- Cylinder dogging: Includes conventional mortise cylinder, PDQ's SCC Keyway (Schlage C Compatible), Keyed Different.
- 4-1/4"
- 1-3/4"
- From 36" to 48"
- 630 – Satin Stainless Steel
- Device supplied with sex nuts, wood screws and machine screws
- Device centerline from finished floor: 40" (1016mm)
- 1/2" (13mm) diameter tubular stock for doors up to 8" max height.
- UL/ULC 305 listed for "Panic", UL10C Listed for "Fire Exit Hardware" labeled for up to 3 hours for 40" x 80" maximum single, 80" x 80" maximum pairs
- Certified to ANSI/BHMA A156.3-2001 Grade 1
- Meets requirements of the Buy American Act.
- Ten (10) year limited warranty

## CROSS REFERENCE

DESCRIPTION	PDQ	CORBIN	DORMA	PRECISION	SARGENT	VON DUPRIN	YALE
SURFACE VERTICAL ROD HEX DOGGING	6200V	ED5400	9400	APEX 2100	8700	9927-E0	7110
SURFACE VERTICAL ROD CYLINDER DOGGING	6201V	ED5400-M52	CD9400	APEX 2100CD	16-8700	9927-E0-F	7115
SURFACE VERTICAL ROD FIRE LISTED	6200VF	ED5400A	F9400	APEX FL2100	12-8700	9927-E0-F	7110F

# HOW TO ORDER

PDQ MODEL NUMBER	CABVI NUMBER	CABVI NUMBER	PDQ MODEL NUMBER
6200 R 630	3-145-0060L	3-145-0060L	6200 R 630
6200 RA 630	3-145-0063L	3-145-0061L	6201 R 630
6200 RF 630	3-145-0062L	3-145-0062L	6200 RF 630
6200 RFA 630	3-145-0065L	3-145-0063L	6200 RA 630
6200 V 630	3-145-0066L	3-145-0064L	6201 RA 630
6200 VA 630	3-145-0069L	3-145-0065L	6200 RFA 630
6200 VF 630	3-145-0068L	3-145-0066L	6200 V 630
6200 VFA 630	3-145-0071L	3-145-0067L	6201 V 630
6201 R 630	3-145-0061L	3-145-0068L	6200 VF 630
6201 RA 630	3-145-0064L	3-145-0069L	6200 VA 630
6201 V 630	3-145-0067L	3-145-0070L	6201 VA 630
6201 VA 630	3-145-0070L	3-145-0071L	6200 VFA 630

ORDERING EXAMPLE: 3-145-0060L

## PDQ MODEL NUMBER DESCRIPTION GUIDE

SERIES	DEVICE TYPE	SIZE	FINISH
62 - Exit Device Series	R – Rim V – Surface Vertical Rod	A – For doors up to 48" Blank - 3ft (Default)	630 – Satin Stainless Steel
<b>62</b>	<b>00</b>	<b>R</b>	<b>F</b>
00 – Hex Key Dogging 01 – Cylinder Dogging	F – Fire Listed Blank – Panic Listed (Default)	<b>A</b>	<b>630</b>
<b>DOGGING</b>	<b>OPENING TYPE</b>	<b>DOOR HEIGHT</b>	

Notes



**PDQ Manufacturing**  
 2754 Creek Hill Road,  
 Leola, PA 17540  
 Technical Service: 800-441-9692  
 www.pdqlocks.com



**Customer Service: 513-497-4501**  
 Customer.service@cincyblind.org  
 www.cincyblind.org


# MR SERIES GRADE 1 MORTISE LOCK

## SPECIFICATIONS


**FOR DOORS:**  
**BACKSET:**  
**CASE:**  
**ARMOR FRONT:**  
**HANDING:**  
**STRIKE:**  
**LATCHBOLT:**  
**DEADBOLT:**  
**TRIM:**  
**CONVENTIONAL CYLINDER:**  
**INTERCHANGEABLE CORE HOUSING:**  
  
**INTERCHANGEABLE CORE:**  
**KEYING, KEYWAYS:**  
  
**FINISHES:**  
**CERTIFICATIONS, LISTINGS**  
**COMPLIANCES:**  
  
**WARRANTY:**  
**COUNTRY OF ORIGIN:**



**MR SERIES**



PHILADELPHIA (PHL) LEVER  
TRIM: PJEW



DALLAS (DAL) LEVER  
TRIM: DJEW

- 1-3/4"
- 2-3/4"
- 13-gauge cold rolled steel mechanism
- Beveled 1/8" on 2"
- Chassis set for RH (default)
- Handed Curved Lip (default)
- 3/4" Throw
- 1" Throw
- **JW** Wide Escutcheon trim, PHL, DAL levers - stainless steel.
- Sold separately. Contact agency.
- Supplied with Best SFIC compatible housing (default).
- Large format (Schlage LFIC compatible) available. Contact agency.
- Small and large format interchangeable cores sold separately. Contact agency.
- Included when cylinder or interchangeable core is specified/ordered. Most keyways available including Schlage C and Best A. Contact agency.
- 630 (US32D) Stainless Steel.
- UL/CUL 10C listed for 3 hrs, for single doors up to 40" x 80"
- Certified to ANSI/BHMA 156.13-2005 **Operational Grade 1 and Security Grade 1**
- **Windstorm Rated** - Florida Building Code listed FL3262, ANSI A250.13, ASTM E1886, ASTM E330, Outswing: 350 ft-lbs., Inswing: N/R, Design Load Rating: 1485 lbf. (functions with deadbolts only)
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- JW Wide Escutcheon Trim complies with Unified Facilities Guide Specification 08 71 00 (August 2008)
- Lifetime Limited Warranty
- Proudly assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.

## CROSS REFERENCE

ANSI #	PDQ FUNCTION	BEST	CORBIN	DORMA	SARGENT	SCHLAGE	YALE
F07	MR115	45HD	ML2057	M9080	8204	L9080	AU8805FL
F04	MR116	45HA	ML2051	M9050	8205	L9050	AU8807FL
F01	MR126	45HN	ML2071	M9010	8215	L9010	AU8801FL
F13	MR136	45HT	ML2065	M9956	8225	L9456	AU8822FL
F20	MR162	45HAB	ML2067	M9953	8243	L9453	AU8847FL
F22	MR176	45HLT	ML2060	M9040	8265	L9040	AU8862FL
F19	MR179	45HL	ML2030	M9940	8266	L9440	AU8802FL

LEVER	PDQ	BEST	CORBIN	DORMA	SARGENT	SCHLAGE	YALE
LEVER	PHILADELPHIA	15	NS NEWPORT	LR	L	06 RHODES	AU AUGUSTA
	BOSTON	14	PS PRINCETON	LC	P	17SPARTA	PB PACIFIC BEACH

## FUNCTIONS – NON KEYED

FUNCTION	FUNCTION NUMBER	OUTSIDE   INSIDE	DESCRIPTION	ANSI NUMBER
Passage	MR126™		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> </ul>	F01
Privacy	MR176™		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> <li>Emergency coin turn outside unlocks outside lever</li> <li>Thumbturn inside locks/unlocks outside lever</li> <li>Closing door unlocks outside lever</li> <li>Rotating inside lever unlocks outside lever</li> </ul>	F22
Privacy with Deadbolt and Egress	MR179		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> <li>Emergency coin turn outside retracts deadbolt</li> <li>Thumbturn inside extends/retracts deadbolt</li> <li>Inside lever simultaneously retracts latchbolt and deadbolt</li> </ul>	F19

## FUNCTIONS – KEYED

FUNCTION	FUNCTION NUMBER	OUTSIDE   INSIDE	DESCRIPTION	ANSI NUMBER
Storeroom	MR115		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from inside</li> <li>Key outside retracts latchbolt</li> <li>Rigid outside lever</li> <li>Auxiliary latch deadlocks latchbolt</li> </ul>	F07
Office	MR116		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> <li>Toggle locks/unlocks outside lever</li> <li>Key outside retracts latchbolt</li> <li>Auxiliary latch deadlocks latchbolt</li> </ul>	F04
Corridor	MR136		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> <li>Key outside extends/retracts deadbolt</li> <li>Thumbturn inside extends/retracts deadbolt</li> <li>Inside lever simultaneously retracts latchbolt and deadbolt</li> <li>Auxiliary latch deadlocks latchbolt</li> </ul>	F13
Dormitory or Exit	MR162		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> <li>Toggle locks/unlocks outside lever</li> <li>Key outside retracts latchbolt</li> <li>Key outside extends/retracts deadbolt</li> <li>Thumbturn inside extends/retracts deadbolt</li> <li>Inside lever simultaneously retracts latchbolt and deadbolt</li> <li>Auxiliary latch deadlocks latchbolt</li> </ul>	F20

## PDQ MODEL NUMBER DESCRIPTION GUIDE

SERIES	FUNCTION*	TRIM	FINISH	STRIKE	CYLINDER HOUSING
MR	116	PJEW	630	CL	SF7L

\*See function table above

**DJEW** — DAL LEVER, J WIDE EXCUTCHEON  
**PJEW** — PHL LEVER, J WIDE EXCUTCHEON

**630** — SATIN STAINLESS STEEL

**CL** — CURVED LIP

**SF7L** — SFIC 7 PIN HOUSING, LESS CORE

# HOW TO ORDER

PDQ MODEL NUMBER	CABVI NUMBER	CABVI NUMBER	PDQ MODEL NUMBER
MR 115 DJEW 630 CL SFL7	3-145-0030L	3-145-0029L	MR 115 PJEW 630 CL SFL7
MR 115 PJEW 630 CL SFL7	3-145-0029L	3-145-0030L	MR 115 DJEW 630 CL SFL7
MR 116 DJEW 630 CL SFL7	3-145-0032L	3-145-0031L	MR 116 PJEW 630 CL SFL7
MR 116 PJEW 630 CL SFL7	3-145-0031L	3-145-0032L	MR 116 DJEW 630 CL SFL7
MR 126 DJEW 630 CL	3-145-0034L	3-145-0033L	MR 126 PJEW 630 CL
MR 126 PJEW 630 CL	3-145-0033L	3-145-0034L	MR 126 DJEW 630 CL
MR 136 DJEW 630 CL SFL7	3-145-0036L	3-145-0035L	MR 136 PJEW 630 CL SFL7
MR 136 PJEW 630 CL SFL7	3-145-0035L	3-145-0036L	MR 136 DJEW 630 CL SFL7
MR 162 DJEW 630 CL SFL7	3-145-0038L	3-145-0037L	MR 162 PJEW 630 CL SFL7
MR 162 PJEW 630 CL SFL7	3-145-0037L	3-145-0038L	MR 162 DJEW 630 CLSFL7
MR 176 DJEW 630 CL	3-145-0042L	3-145-0039L	MR 179 PJEW 630 CL
MR 176 PJEW 630 CL	3-145-0041L	3-145-0040L	MR 179 DJEW 630 CL
MR 179 DJEW 630 CL	3-145-0040L	3-145-0041L	MR 176 PJEW 630 CL
MR 179 PJEW 630 CL	3-145-0039L	3-145-0042L	MR 176 DJEW 630 CL

**ORDERING EXAMPLE: 3-145-0030L**

Notes



**PDQ Manufacturing**  
 2754 Creek Hill Road,  
 Leola, PA 17540  
 Technical Service: 800-441-9692  
 www.pdqlocks.com



**Customer Service: 513-497-4501**  
 Customer.service@cincyblind.org  
 www.cincyblind.org